



CI-V REFERENCE GUIDE

HF/50MHz TRANSCEIVER

IC-7610

Table of contents

Remote control	2
■ Remote control (CI-V) information	2
◇ CI-V connection	2
◇ Preparing	2
◇ About the data format	2
◇ Command table	3
◇ Command formats	10

Remote control

Remote control (CI-V) information


◆ CI-V connection

The transceiver's operating frequency, mode, VFO and memory selection, can be remotely controlled using a PC.

- Use a USB cable (user supplied) to connect the IC-7610 and the PC (controller).
The required USB driver and driver installation guide can be downloaded from the Icom web site.
https://www.icomjapan.com/support/firmware_driver/

① The download procedure on the web page may be changed without notice.

• Connection example

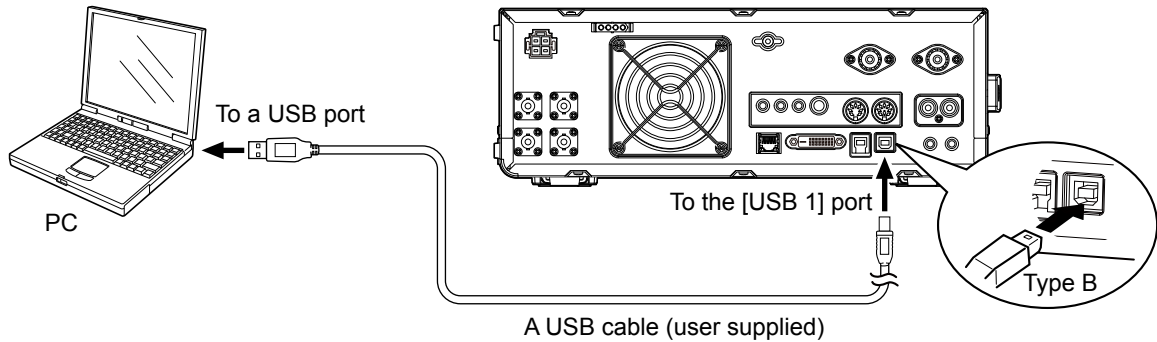

① Make the connection as short as possible. The transceiver may not be recognized by the controller, depending on the USB cable length.


◆ Preparing

The Icom Communications Interface V (CI-V) is used for remote control. To control the transceiver, first set its address, data communication speed, and transceive function. These settings are set in Set mode (Refer to the IC-7610 instruction manual).

◆ About the data format


The CI-V system can be written using the following data formats. Data formats differ according to command numbers. A data area or sub command is added for some commands.

Controller to IC-7610

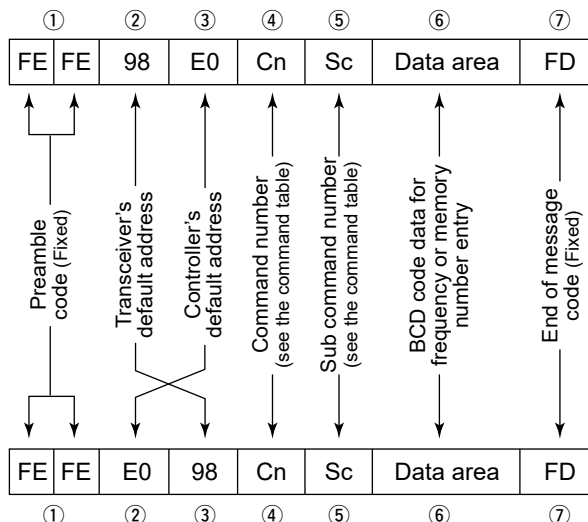

IC-7610 to controller

OK message to controller

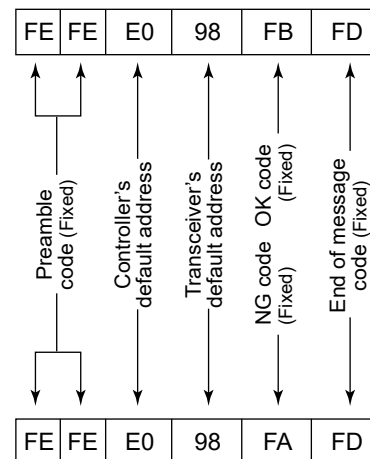

NG message to controller

Remote control

NOTE: Operation to the some control dials overrides CI-V commands. If a control dial (such as the AF Volume dial that has a mark on it) is rotated after sending a CI-V command, the command will be overwritten by the operation.

◇ Command table

Cmd.	Sub cmd.	Data	Description
00		see p. 10	Send frequency data (transceive)
01		see p. 10	Send mode data (transceive)
02		see p. 10	Read band edge frequencies
03		see p. 10	Read operating frequency
04		see p. 10	Read operating mode
05		see p. 10	Set operating frequency
06		see p. 10	Set operating mode
07	Ⓢ		Select the VFO mode
	B0		Exchange main and sub bands
	B1		Equalize main and sub bands
	C0		Turn OFF Dualwatch
	C1		Turn ON Dualwatch
	C2*	00 or 01	Send/read the dualwatch setting (00=OFF, 01=ON)
	D0		Select the main band
	D1		Select the sub band
	D2*	00	Send/read main band selection
			01
08			Select the Memory mode
		0001 ~ 0099	Select the Memory channel (0001=M-CH01, 0099=M-CH99)
		0100	Select program scan edge channel P1
		0101	Select program scan edge channel P2
09		Memory write	
0A		Memory copy to VFO	
0B		Memory clear	
0E	00		Cancel the scan
	01		Start a Programmed/memory scan
	02		Start a Programmed scan
	03		Start a ΔF scan
	12		Start a Fine programmed scan
	13		Start a Fine ΔF scan
	22		Start a Memory scan
	23		Start a Select memory scan
	Ax (x=1 ~ 7)		Select ΔF scan span (x=1 (±5 kHz), x=2 (±10 kHz), x=3 (±20 kHz), x=4 (±50 kHz), x=5 (±100 kHz), x=6 (±500 kHz), x=7 (±1 MHz))
	B0		Clear the Select channel setting
	B1		Set as select channel (The previously set number by CI-V is set after turning power ON, or "1" is selected if no selection is performed.)
		01 ~ 03	Set the channel as a Select channel (01=SEL1, 02=SEL2, 03=SEL3)
	B2	00 ~ 03	Set the Select memory scan channel (00=ALL, 01=SEL1, 02=SEL2, 03=SEL3)
D0		Set Scan resume OFF	
D3		Set Scan resume ON	
0F		00	Read Split OFF setting
		01	Read Split ON setting
	00		Turn OFF the Split function
	01		Turn ON the Split function
10*		00 ~ 08	Send/read the tuning step (00=OFF (10 Hz or 1 Hz), 01=100 Hz, 02=1 kHz, 03=5 kHz, 04=9 kHz, 05=10 kHz, 06=12.5 kHz, 07=20 kHz, 08=25 kHz)
11* Ⓢ		00	Send/read attenuator OFF setting
		03	Send/read 3 dB attenuator setting
		06	Send/read 6 dB attenuator setting
		09	Send/read 9 dB attenuator setting
		12	Send/read 12 dB attenuator setting
		15	Send/read 15 dB attenuator setting
		18	Send/read 18 dB attenuator setting
		21	Send/read 21 dB attenuator setting
	24	Send/read 24 dB attenuator setting	

Cmd.	Sub cmd.	Data	Description
11* Ⓢ		27	Send/read 27 dB attenuator setting
		30	Send/read 30 dB attenuator setting
		33	Send/read 33 dB attenuator setting
		36	Send/read 36 dB attenuator setting
		39	Send/read 39 dB attenuator setting
		42	Send/read 42 dB attenuator setting
	45	Send/read 45 dB attenuator setting	
12* Ⓢ	00*1	00 or 01	Select/read ANT1 selection (00=RX ANT OFF, 01=RX ANT ON)
	01*1	00 or 01	Select/read ANT2 selection (00=RX ANT OFF, 01=RX ANT ON)
13	00		Speech all data with voice synthesizer (S meter level, frequency and mode)
	01		Speech the operating frequency and S meter level by voice synthesizer
	02		Speech the operating mode by voice synthesizer ⓈThe mode is announced after the ongoing speech.
14*	01 Ⓢ	0000 ~ 0255	Send/read the AF level (0000=min. ~ 0255=max.)
	02 Ⓢ	0000 ~ 0255	Send/read the RF gain level (0000=min. ~ 0255=max.)
	03 Ⓢ	0000 ~ 0255	Send/read the squelch level (0000=min. ~ 0255=max.)
	05 Ⓢ	0000 ~ 0255	Send/read the APF position (10 Hz steps) (0000=Pitch-550 Hz, 0128=Pitch, 0255=Pitch+550 Hz)
	06 Ⓢ	0000 ~ 0255	Send/read the NR level (0000=0%, 0255=100%)
	07 Ⓢ	0000 ~ 0255	Send/read inner [TWIN PBT] position (0000=max. CCW, 0128=center, 0255=max. CW)
	08 Ⓢ	0000 ~ 0255	Send/read outer [TWIN PBT] position (0000=max. Counter Clockwise, 0128=center, 0255=max. Clockwise)
	09	0000 ~ 0255	Send/read CW pitch (5 Hz steps) (0000=300 Hz, 0128=600 Hz, 0255=900 Hz)
	0A	0000 ~ 0255	Send/read RF power (0000=min. ~ 0255=max.)
	0B	0000 ~ 0255	Send/read MIC gain (0000=min. ~ 0255=max.)
	0C	0000 ~ 0255	Send/read keying speed (0000=6 wpm ~ 0255=48 wpm)
	0D Ⓢ	0000 ~ 0255	Send/read Notch filter setting (0000=max. Counter Clockwise, 0128=center, 0255=max. Clockwise)
	0E	0000 ~ 0255	Send/read the COMP level (0000=0 ~ 0255=10)
	0F	0000 ~ 0255	Send/read the Break-IN Delay setting (0000=2.0 d ~ 0255=13.0 d)
	12 Ⓢ	0000 ~ 0255	Send/read NB level (0000=0% ~ 0255=100%)
	13 Ⓢ	0000 ~ 0255	Send/read the DIGI-SEL shift amount (0000=min. ~ 0255=max.)
	14	0000 ~ 0255	Send/read DRIVE gain (0000=0% ~ 0255=100%)
	15	0000 ~ 0255	Send/read Monitor audio [MONI] level (0000=0% ~ 0255=100%)
	16	0000 ~ 0255	Send/read the VOX gain (0000=0% ~ 0255=100%)
17	0000 ~ 0255	Send/read the Anti VOX gain (0000=0% ~ 0255=100%)	
19	0000 ~ 0255	Send/read LCD backlight brightness (0000=0% ~ 0255=100%)	
15	01 Ⓢ	00 or 01	Read noise or S-meter squelch status (00=Close, 01=Open)
	02 Ⓢ	0000 ~ 0255	Read S-meter level (0000=S0, 0120=S9, 0241=S9+60 dB)
	05 Ⓢ	00 or 01	Read various squelch (tone squelch, and so on) status (00=Close, 01=Open)

Remote control

◇ Command table (Continued)

Cmd.	Sub cmd.	Data	Description
15	07 ㉔	00 or 01	Read the Overflow status (00=OVF indicator is OFF, 01=OVF indicator is ON)
	11	0000 ~ 0255	Read the PO meter level (0000=0% ~ 0143=50% ~ 212=100%)
	12	0000 ~ 0255	Read SWR meter level (0000=SWR1.0, 0048=SWR1.5, 0080=SWR2.0, 0120=SWR3.0)
	13	0000 ~ 0255	Read ALC meter level (0000=Min. ~ 0120=Max.)
	14	0000 ~ 0255	Read COMP meter level (0000=0 dB, 0130=15 dB, 0241=30 dB)
	15	0000 ~ 0255	Read Vd meter level (0000=0 V, 0151=10 V, 0211=16 V)
	16	0000 ~ 0255	Read Id meter level (0000=0A, 0077=10A, 0165=20A, 0241=30A)
16*	02 ㉔	00	Preamp OFF
		01	Preamp 1 ON
		02	Preamp 2 ON
	12 ㉔	01 ~ 03	Set the AGC time constant (01=FAST, 02=MID, 03=SLOW)
	22 ㉔	00 or 01	Set the Noise blanker (00=OFF, 01=ON)
	32 ㉔	00	Audio peak filter OFF
		01	Audio peak filter WIDE ON (320 Hz is selected when SHARP APF is set)
		02	Audio peak filter MID ON (160 Hz is selected when SHARP APF is set)
		03	Audio peak filter NAR ON (80 Hz is selected when SHARP APF is set)
	40 ㉔	00 or 01	Set the Noise reduction (00=OFF, 01=ON)
	41 ㉔	00 or 01	Set the Auto Notch function (00=OFF, 01=ON)
	42 ㉔	00 or 01	Set the Repeater tone (00=OFF, 01=ON)
	43 ㉔	00 or 01	Set the Tone squelch (00=OFF, 01=ON)
	44	00 or 01	Set the Speech compressor (00=OFF, 01=ON)
	45	00 or 01	Set the Monitor [MONI] function (00=OFF, 01=ON)
	46	00 or 01	Set the VOX function (00=OFF, 01=ON)
	47	00	BK-IN function OFF
		01	Semi BK-IN function ON
		02	Full BK-IN function ON
	48 ㉔	00 or 01	Set the Manual Notch function (00=OFF, 01=ON)
	4E ㉔	00 or 01	Set the DIGI-SEL function (00=OFF, 01=ON)
4F ㉔	00 or 01	Set the Twin peak filter (00=OFF, 01=ON) (Can be turned ON only when Mark and Shift are set to 2125 Hz and 170 Hz, respectively)	
50	00 or 01	Set the Dial lock function (00=OFF, 01=ON)	
53*2 ㉔	00 or 01	Set the ANT-RX I/O (00=OFF, 01=ON)	
56 ㉔	00 or 01	Set the DSP IF filter type (00=SHARP, 01=SOFT)	
57 ㉔	00 ~ 02	Set the Manual Notch width (00=WIDE, 01=MID, 02=NAR)	
58	00 ~ 02	Set the SSB transmit bandwidth (00=WIDE, 01=MID, 02=NAR) (One of following values is applied, depending on the "COMP" status (ON or OFF): WIDE (Command: 1A 05 0015), MID (Command: 1A 05 0016) or NAR (Command: 1A 05 0017))	
5E	00 or 01	MAIN/SUB Tracking function (00=OFF, 01=ON)	
65 ㉔	00 or 01	Set the IP Plus function (00=OFF, 01=ON)	

Cmd.	Sub cmd.	Data	Description	
17*3		see p. 10	Send CW messages	
18	00		Turn OFF the transceiver	
	01*4		Turn ON the transceiver	
19	00		Read the transceiver ID	
1A*	00	see p. 11	Send/read memory contents	
	01	see p. 10	Send/read band stacking register contents	
	02*6	see p. 13	Send/read memory keyer contents	
	03 ㉔	see p. 12	Send/read the selected IF filter width	
	04 ㉔	see p. 12	Send/read the selected AGC time constant	
	05	0001	see p. 12	Tone Control/TBW > RX > Send/read SSB RX HPF/LPF settings
			00 ~ 10	Tone Control/TBW > RX > Send/read SSB RX Tone (Bass) level (00=-5 ~ 10=+5)
		0003	00 ~ 10	Tone Control/TBW > RX > Send/read SSB RX Tone (Treble) level (00=-5 ~ 10=+5)
		0004	see p. 12	Tone Control/TBW > RX > Send/read AM RX HPF/LPF settings
		0005	00 ~ 10	Tone Control/TBW > RX > Send/read AM RX Tone (Bass) level (00=-5 ~ 10=+5)
		0006	00 ~ 10	Tone Control/TBW > RX > Send/read AM RX Tone (Treble) level (00=-5 ~ 10=+5)
		0007	see p. 12	Tone Control/TBW > RX > Send/read FM RX HPF/LPF settings
		0008	00 ~ 10	Tone Control/TBW > RX > Send/read FM RX Tone (Bass) level (00=-5 ~ 10=+5)
		0009	00 ~ 10	Tone Control/TBW > RX > Send/read FM RX Tone (Treble) level (00=-5 ~ 10=+5)
		0010	see p. 12	Tone Control/TBW > RX > Send/read CW RX HPF/LPF settings
		0011	see p. 12	Tone Control/TBW > RX > Send/read RTTY RX HPF/LPF settings
		0012	see p. 12	Tone Control/TBW > RX > Send/read PSK RX HPF/LPF settings
		0013	00 ~ 10	Tone Control/TBW > TX > Send/read SSB TX Tone (Bass) level (00=-5 ~ 10=+5)
		0014	00 ~ 10	Tone Control/TBW > TX > Send/read SSB TX Tone (Treble) level (00=-5 ~ 10=+5)
		0015	see p. 12	Tone Control/TBW > TX > Send/read SSB TX bandwidth for wide
		0016	see p. 12	Tone Control/TBW > TX > Send/read SSB TX bandwidth for mid
0017		see p. 12	Tone Control/TBW > TX > Send/read SSB TX bandwidth for narrow	
0018		00 ~ 10	Tone Control/TBW > TX > Send/read AM TX Tone (Bass) level (00=-5 ~ 10=+5)	
0019		00 ~ 10	Tone Control/TBW > TX > Send/read AM TX Tone (Treble) level (00=-5 ~ 10=+5)	
0020		00 ~ 10	Tone Control/TBW > TX > Send/read FM TX Tone (Bass) level (00=-5 ~ 10=+5)	
0021		00 ~ 10	Tone Control/TBW > TX > Send/read FM TX Tone (Treble) level (00=-5 ~ 10=+5)	
0022	0000 ~ 0255	Function > Beep Level (0000=min. ~ 0255=max.)		
0023	00 or 01	Function > Beep Level Limit (00=OFF, 01=ON)		
0024	00 or 01	Function > Beep (Confirmation) (00=OFF, 01=ON)		
0025	00 or 01	Function > Band Edge Beep (00=OFF, 01=ON) (ON = Beep sounds with a default amateur band)		
	02	Function > Band Edge Beep (02=ON (User))		
	03	Function > Band Edge Beep (03=ON (User) & TX Limit)		

Remote control

◇ Command table (Continued)

Cmd.	Sub cmd.	Data	Description
1A*	05	0026	0050 ~ 0200 Function > Beep Sound (MAIN) (0050=500 Hz ~ 0200=2000 Hz)
		0027	0050 ~ 0200 Function > Beep Sound (SUB) (0050=500 Hz ~ 0200=2000 Hz)
		0028	00 ~ 02 Function > RF/SQL Control (00=Auto, 01=SQL, 02=RF+SQL)
		0029	00 ~ 05 Function > TX Delay > HF (00=OFF, 01=10 ms, 02=15 ms, 03=20 ms, 04=25 ms, 05=30 ms)
		0030	00 ~ 05 Function > TX Delay > 50M (00=OFF, 01=10 ms, 02=15 ms, 03=20 ms, 04=25 ms, 05=30 ms)
		0031	00 ~ 05 Function > Time-Out Timer (CI-V) (00=OFF, 01=3 min., 02=5 min., 03=10 min., 04=20 min., 05=30 min.)
		0032	00 or 01 Function > Quick Dualwatch (00=OFF, 01=ON)
		0033	00 or 01 Function > SPLIT > Quick SPLIT (00=OFF, 01=ON) (Setting the [SPLIT] key operation when it is held down for 1 second.)
		0034	00 or 01 Function > SPLIT > Display Keypad on Quick SPLIT (00=OFF, 01=ON)
		0035	see p. 12 Function > SPLIT > FM SPLIT Offset (HF)
		0036	see p. 12 Function > SPLIT > FM SPLIT Offset (50M)
		0037	00 or 01 Function > SPLIT > SPLIT LOCK (00=OFF, 01=ON)
		0038	00 or 01 Function > Tuner > PTT Start (00=OFF, 01=ON)
		0039	00 or 01 Function > Transverter Function (00=Auto, 01=ON)
		0040	see p. 12 Function > Transverter Offset
		0041	00 ~ 02 Function > RTTY Mark Frequency (00=1275 Hz, 01=1615 Hz, 02=2125 Hz)
		0042	00 ~ 02 Function > RTTY Shift Width (00=170 Hz, 01=200 Hz, 02=425 Hz)
		0043	00 or 01 Function > RTTY Keying Polarity (00=Normal, 01=Reverse)
		0044	00 ~ 02 Function > PSK Tone Frequency (00=1000 Hz, 01=1500 Hz, 02=2000 Hz)
		0045	00 or 01 Function > SPEECH > SPEECH Language (00=English, 01=Japanese)
		0046	00 or 01 Function > SPEECH > SPEECH Speed (00=Slow, 01=Fast)
		0047	00 or 01 Function > SPEECH > S-Level SPEECH (00=OFF, 01=ON)
		0048	00 or 01 Function > SPEECH > MODE SPEECH (00=OFF, 01=ON)
		0049	0000 ~ 0255 Function > SPEECH > SPEECH Level (0000=0% ~ 0255=100%)
		0050	00 or 01 Function > [SPEECH/LOCK] Switch (00=SPEECH/LOCK, 01=LOCK/SPEECH)
		0051	00 or 01 Function > Lock Function (00=MAIN DIAL, 01=ANEL)
		0052	00 or 01 Function > Memo Pad Quantity (00=5 ch, 01=10 ch)
		0053	00 ~ 02 Function > MAIN DIAL Auto TS (00=OFF, 01=Low, 02=High)
		0054	00 or 01 Function > MAIN DIAL Select (USB DIAL—SUB Only) (00=Main only, 01=Main/Sub)
		0055	00 or 01 Function > MAIN/SUB Tracking [MAIN/SUB] Switch (00=OFF, 01=ON)
		0056	00 or 01 Function > MIC Up/Down Speed (00=Slow, 01=Fast)
		0057	00 or 01 Function > Quick RIT/ΔTX Clear (00=OFF, 01=ON)
		0058	00 ~ 02 Function > [NOTCH] Switch (SSB) (00=Auto, 01=Manual, 02=Auto/Manual)
		0059	00 ~ 02 Function > [NOTCH] Switch (AM) (00=Auto, 01=Manual, 02=Auto/Manual)
0060	00 or 01 Function > FILTER Screen MAIN/SUB Select (00=Fix, 01=Auto (by FILTER, PBT Operation))		
0061	00 or 01 Function > SSB/CW Synchronous Tuning (00=OFF, 01=ON)		

Cmd.	Sub cmd.	Data	Description
1A*	05	0062	00 or 01 Function > CW Normal Side (00=LSB, 01=USB)
		0063	00 or 01 Function > Screen Keyboard Type (00=Ten-key, 01=Full Keyboard)
		0064	00 ~ 02 Function > Screen Full Keyboard Layout (00=English, 01=German, 02=French)
		0065	00 or 01 Function > Screen Capture [POWER] Switch (00=OFF, 01=ON)
		0066	00 or 01 Function > Screen Capture Keyboard [Print Screen] (00=OFF, 01=ON)
		0067	00 or 01 Function > Screen Capture Storage Media (00=SD Card, 01=USB flash drive)
		0068	00 or 01 Function > Screen Capture File Type (00=PNG, 01=BMP)
		0069	00 or 01 Function > Calibration Marker (00=OFF, 01=ON)
		0070	0000 ~ 0511 Function > REF Adjust (0000=0%, 0511=100%)
		0071	00 ~ 30 Connectors > Phones > Level (00=-15 dB ~ 30=+15 dB)
		0072	00 or 01 Connectors > Phones > L/R Mix (00=OFF, 01=ON)
		0073	00 or 01 Connectors > ACC AF/IF Output > AF/SQL Output Select (00=MAIN, 01=SUB)
		0074	00 or 01 Connectors > ACC AF/IF Output > Output Select (00=AF, 01=IF)
		0075	00 or 01 Connectors > ACC AF/IF Output > AF/IF XFC Output (SPLIT ON) (00=MAIN, 01=SUB)
		0076	0000 ~ 0255 Connectors > ACC AF/IF Output > AF Output Level (0000=0% ~ 0255=100%)
		0077	00 or 01 Connectors > ACC AF/IF Output > AF SQL (00=OFF (Open), 01=ON)
		0078	00 or 01 Connectors > ACC AF/IF Output > AF Beep/Speech... Output (00=OFF, 01=ON)
		0079	0000 ~ 0255 Connectors > ACC AF/IF Output > ACC IF Output Level (0000=0% ~ 0255=100%)
		0080	00 or 01 Connectors > USB AF/IF Output > Output Select (00=AF, 01=IF)
		0081	00 or 01 Connectors > USB AF/IF Output > AF/IF XFC Output (SPLIT ON) (00=MAIN, 01=SUB)
		0082	0000 ~ 0255 Connectors > USB AF/IF Output > AF Output Level (0000=0%, 0255=100%)
		0083	00 or 01 Connectors > USB AF/IF Output > AF SQL (00=OFF (Open), 01=ON)
		0084	00 or 01 Connectors > USB AF/IF Output > AF Beep/Speech... Output (00=OFF, 01=ON)
		0085	0000 ~ 0255 Connectors > USB AF/IF Output > IF Output Level (0000=0%, 0255=100%)
0086	00 or 01 Connectors > LAN AF/IF Output > Output Select (00=AF, 01=IF)		
0087	00 or 01 Connectors > LAN AF/IF Output > AF SQL (00=OFF (Open), 01=ON)		
0088	0000 ~ 0255 Connectors > MOD Input > ACC MOD Level (0000=0% ~ 0255=100%)		
0089	0000 ~ 0255 Connectors > MOD Input > USB MOD Level (0000=0% ~ 0255=100%)		
0090	0000 ~ 0255 Connectors > MOD Input > LAN MOD Level (0000=0% ~ 0255=100%)		
0091	00 ~ 05 Connectors > MOD Input > DATA OFF MOD (00=MIC, 01=ACC, 02=MIC,ACC, 03=USB, 04=MIC,USB, 05=LAN)		

Remote control

◇ Command table (Continued)

Cmd.	Sub cmd.	Data	Description
1A*	05	0092	00 ~ 05 Connectors > MOD Input > DATA1 MOD (00=MIC, 01=ACC, 02=MIC,ACC, 03=USB, 04=MIC,USB, 05=LAN)
		0093	00 ~ 05 Connectors > MOD Input > DATA2 MOD (00=MIC, 01=ACC, 02=MIC,ACC, 03=USB, 04=MIC,USB, 05=LAN)
		0094	00 ~ 05 Connectors > MOD Input > DATA3 MOD (00=MIC, 01=ACC, 02=MIC,ACC, 03=USB, 04=MIC,USB, 05=LAN)
		0095	00 ~ 04 Connectors > USB SEND/Keying > USB SEND (00=OFF, 01=USB1(A) DTR, 02=USB1(A) RTS, 03=USB1(B) DTR, 04=USB1(B) RTS) (You cannot select the same setting for USB keying (CW) or USB keying (RTTY).)
		0096	00 ~ 04 Connectors > USB SEND/Keying > USB Keying (CW) (00=OFF, 01=USB1(A) DTR, 02=USB1(A) RTS, 03=USB1(B) DTR, 04=USB1(B) RTS) (You cannot select the same setting for USB SEND.)
		0097	00 ~ 04 Connectors > USB SEND/Keying > USB Keying (RTTY) (00=OFF, 01=USB1(A) DTR, 02=USB1(A) RTS, 03=USB1(B) DTR, 04=USB1(B) RTS) (You cannot select the same setting for USB SEND.)
		0098	00 or 01 Connectors > External Keypad > VOICE (00=OFF, 01=ON)
		0099	00 or 01 Connectors > External Keypad > KEYER (00=OFF, 01=ON)
		0100	00 or 01 Connectors > External Keypad > RTTY (00=OFF, 01=ON)
		0101	00 or 01 Connectors > External Keypad > PSK (00=OFF, 01=ON)
		0102	00 or 01 Connectors > Keyboard/Mouse > Keyboard [F1] ~ [F8] (VOICE) (00=OFF, 01=ON)
		0103	00 or 01 Connectors > Keyboard/Mouse > Keyboard [F1] ~ [F8] (KEYER) (00=OFF, 01=ON)
		0104	00 ~ 10 Connectors > Keyboard/Mouse > Keyboard Type (00=English, 01=Japanese, 02=United Kingdom, 03=French, 04=French (Canadian), 05=German, 06=Portuguese, 07=Portuguese (Brazilian), 08=Spanish, 09=Spanish (Latin American), 10=Italian)
		0105	0010 ~ 0100 Connectors > Keyboard/Mouse > Keyboard Repeat Delay (0010=100 msec., 0100=1000 msec. (in 50 msec. steps))
		0106	00 ~ 31 Connectors > Keyboard/Mouse > Keyboard Repeat Rate (00=2.0 cps ~ 31=30.0 cps)
		0107	00 ~ 02 Connectors > Keyboard/Mouse > Mouse Pointer Speed (00=Slow, 01=Mid, 02=Fast)
		0108	00 or 01 Connectors > Keyboard/Mouse > Mouse Pointer Acceleration (00=OFF, 01=ON)
		0109	00 or 01 Connectors > USB DIAL > USB DIAL Select (00=Sub only, 01=Main/Sub)
		0110	00 ~ 02 Connectors > USB DIAL > USB DIAL Auto TS (00=OFF, 01=Low, 02=High)
		0111	00 or 01 Connectors > USB DIAL > USB DIAL [TRANSMIT] Switch (00=Push to toggle, 01=Hold down to transmit)
		0112	00 or 01 Connectors > CI-V > CI-V Transceive (00=OFF, 01=ON)
		0113	0000 ~ 0223 Connectors > CI-V > CI-V USB/ LAN→REMOTE Transceive Address (0000=00h ~ 0223=DFh) (in Hexadecimal)

Cmd.	Sub cmd.	Data	Description
1A*	05	0114	00 or 01 Connectors > CI-V > CI-V Output (for ANT) (00=OFF, 01=ON)
		0115	00 or 01 Connectors > CI-V > CI-V USB Port (00=Link to [REMOTE], 01=Unlink to [REMOTE])
		0116	00 or 01 Connectors > CI-V > CI-V USB Echo Back (00=OFF, 01=ON)
		0117	00 ~ 07 Connectors > External Meter > External Meter Output (MAIN) (00=Auto, 01=S (main), 02=Po, 03=SWR, 04=ALC, 05=COMP, 06=Vd, 07=Id)
		0118	00 ~ 07 Connectors > External Meter > External Meter Output (SUB) (00=Auto, 01=S (sub), 02=Po, 03=SWR, 04=ALC, 05=COMP, 06=Vd, 07=Id)
		0119	0000 ~ 0255 Connectors > External Meter > External Meter Level (MAIN) (0000=0% ~ 0255=100%)
		0120	0000 ~ 0255 Connectors > External Meter > External Meter Level (SUB) (0000=0% ~ 0255=100%)
		0121	00 ~ 03 Connectors > Decode Baud Rate (00=4800 bps, 01=9600 bps, 02=19200 bps, 03=38400 bps)
		0122	00 or 01 Connectors > SEND Relay Type (00=Reed, 01=MOS-FET)
		0123	00 ~ 02 Connectors > ACC BAND Voltage Output (00=MAIN, 01=SUB, 02=TX)
		0124	00 or 01 Connectors > MIC Input DC Bias (00=OFF, 01=ON)
		0125	00 or 01 Connectors > REF IN (00=IN, 01=OFF)
		0126	00 or 01 Network > DHCP (valid after restart) (00=OFF, 01=ON)
		0127	0000000000 000001 ~ 0255025502 550254 550254 Network > IP Address (valid after restart) (0000000000000001=0.0.0.1 ~ 0255025502 550254=255.255.255.254) (Valid when the DHCP (valid after restart) is set to OFF.)
		0128	0000000000 000001 ~ 0255025502 550254 Network > DHCP (valid after restart) Read the IP address set by the DHCP server (0000000000000001=0.0.0.1 ~ 0255025502 550254=255.255.255.254) (When the DHCP setting (valid after restart) is set to OFF, the manually set IP address (static IP address) is returned.)
		0129	01 ~ 30 Network > Subnet Mask (valid after restart) (01=128.0.0.0 (1 bit) ~ 30=255.255.255.252 (30 bit)) (Valid when the DHCP (valid after restart) setting is set to OFF.)
		0130	0000000000 000001 ~ 0255025502 550254, FF Network > Default Gateway (valid after restart) (0000000000000001=0.0.0.1 ~ 0255025502 550254=255.255.255.254, FF=Blank) (Valid when the DHCP (valid after restart) setting is set to OFF.)
		0131	0000000000 000001 ~ 0255025502 550254, FF Network > Primary DNS Server (valid after restart) (0000000000000001=0.0.0.1 ~ 0255025502 550254=255.255.255.254, FF=Blank) (Valid when the DHCP (valid after restart) setting is set to OFF.)
		0132	0000000000 000001 ~ 0255025502 550254, FF Network > 2nd DNS Server (valid after restart) (0000000000000001=0.0.0.1 ~ 0255025502 550254=255.255.255.254, FF=Blank) (Valid when the DHCP (valid after restart) setting is set to OFF.)
		0133	see p. 11 Network > Network Name (Up to 15 characters)
		0134	00 or 01 Network > Network Control (valid after restart) (00=OFF, 01=ON)
		0135	00 or 01 Network > Power OFF Setting (for Remote Control) (00=Shutdown only, 01=Standby/Shutdown)
		0136	000001 ~ 065535 Network > Control Port (UDP) (valid after restart) (000001=1 ~ 065535=65535)

Remote control

◇ Command table (Continued)

Cmd.	Sub cmd.	Data	Description
1A*	05	0137	000001 ~ 065535 Network > Serial Port (UDP) (valid after restart) (000001=1 ~ 065535=65535)
		0138	000001 ~ 065535 Network > Audio Port (UDP) (valid after restart) (000001=1 ~ 065535=65535)
		0139	00 or 01 Network > Internet Access Line (valid after restart) (00=FTTH (Fiber To The Home), 01=ADSL/CATV)
		0140	see p. 11 Network > Network Radio Name (Up to 16 characters)
		0141	0000 ~ 0255 Display > LCD Backlight (0000=0% ~ 0255=100%)
		0142	0000 ~ 0255 Display > LED Bright (0000=0% ~ 0255=100%)
		0143	00 or 01 Display > Display Type (00=A, 01=B)
		0144	00 or 01 Display > Display Font (00=Basic, 01=Round)
		0145	00 ~ 02 Display > Meter Response (Standard, Edgewise) (00=Slow, 01=Mid, 02=Fast)
		0146	00 ~ 02 Display > Meter Type (Normal Screen) (00=Standard, 01=Edgewise, 02=Bar)
		0147	00 or 01 Display > Meter Type (Expand Screen) (00=Edgewise, 01=Bar)
		0148	00 or 01 Display > Meter Peak Hold (Bar) (00=OFF, 01=ON)
		0149	00 or 01 Display > Memory Name (00=OFF, 01=ON)
		0150	00 or 01 Display > APF-Width Popup (APF OFF→ON) (00=OFF, 01=ON)
		0151	00 ~ 03 Display > Screen Saver (00=OFF, 01=15 minutes, 02=30 minutes, 03=60 minutes)
		0152	00 or 01 Display > External Display (00=OFF, 01=ON)
		0153	00 or 01 Display > External Display Resolution (00=800x480, 01=800x600)
		0154	00 or 01 Display > Opening Message (00=OFF, 01=ON)
		0155	see p. 11 Display > My Call (Up to 10 characters)
		0156	00 or 01 Display > Power ON Check (00=OFF, 01=ON)
		0157	00 or 01 Display > Display Language (00=English, 01=Japanese)
		0158	20000101 ~ 20991231 Time Set > Date/Time > Date (20000101=2000/01/01 ~ 20991231=2099/12/31)
		0159	0000 ~ 2359 Time Set > Date/Time > Time (0000=00:00 ~ 2359=23:59)
		0160	00 or 01 Time Set > Date/Time > NTP Function (00=OFF, 01=ON)
		0161	see p. 11 Time Set > Date/Time > NTP Server Address
		0162	see p. 13 Time Set > UTC Offset
		0163	00 or 01 Time Set > CLOCK2 Function (00=OFF, 01=ON)
		0164	see p. 13 Time Set > CLOCK2 UTC Offset
		0165	see p. 11 Time Set > CLOCK2 Name (Up to 3 characters)
		0166	00 or 01 SCOPE > Scope during Tx (CENTER TYPE) (00=OFF, 01=ON)
		0167	00 ~ 02 SCOPE > Max Hold (00=OFF, 01=10s Hold, 02=ON)
		0168	00 ~ 02 SCOPE > CENTER Type Display (00=Filter center, 01=Carrier point center, 02=Carrier point center (Abs. Freq.))
		0169	00 or 01 SCOPE > Marker Position (Fix Type/ SCROLL Type) (00=Filter center, 01 Carrier point)
		0170	00 ~ 03 SCOPE > Averaging (00=OFF, 01=2, 02=3, 03=4)
		0171	00 or 01 SCOPE > Waveform Type (00=Fill, 01=Fill+Line)
		0172	see p. 12 SCOPE > Waveform Color (Current)
		0173	see p. 12 SCOPE > Waveform Color (Line)
		0174	see p. 12 SCOPE > Waveform Color (Max Hold)

Cmd.	Sub cmd.	Data	Description
1A*	05	0175	00 or 01 SCOPE > Waterfall Display (00=OFF, 01=ON)
		0176	00 ~ 02 SCOPE > Waterfall Speed (00=Slow, 01=Mid, 02=Fast)
		0177	00 ~ 02 SCOPE > Waterfall Size (Expand Screen) (00=Small, 01=Mid, 02=Large)
		0178	00 ~ 09 SCOPE > Waterfall Peak Color Level (00=Grid 1 ~ 09=Grid 10)
		0179	00 or 01 SCOPE > Waterfall Marker Auto-hide (00=OFF, 01=ON)
		0180	00 or 01 SCOPE > Dual Scope Type (00=Over/Under, 01=Side by Side)
		0181	00 or 01 SCOPE > Dual Scope Auto Select (00=OFF, 01=ON)
		0182	see p. 12 SCOPE > Fixed Edges > 0.03 – 1.60 No.1
		0183	see p. 12 SCOPE > Fixed Edges > 0.03 – 1.60 No.2
		0184	see p. 12 SCOPE > Fixed Edges > 0.03 – 1.60 No.3
		0185	see p. 12 SCOPE > Fixed Edges > 1.60 – 2.00 No.1
		0186	see p. 12 SCOPE > Fixed Edges > 1.60 – 2.00 No.2
		0187	see p. 12 SCOPE > Fixed Edges > 1.60 – 2.00 No.3
		0188	see p. 12 SCOPE > Fixed Edges > 2.00 – 6.00 No.1
		0189	see p. 12 SCOPE > Fixed Edges > 2.00 – 6.00 No.2
		0190	see p. 12 SCOPE > Fixed Edges > 2.00 – 6.00 No.3
		0191	see p. 12 SCOPE > Fixed Edges > 6.00 – 8.00 No.1
		0192	see p. 12 SCOPE > Fixed Edges > 6.00 – 8.00 No.2
		0193	see p. 12 SCOPE > Fixed Edges > 6.00 – 8.00 No.3
		0194	see p. 12 SCOPE > Fixed Edges > 8.00 – 11.00 No.1
		0195	see p. 12 SCOPE > Fixed Edges > 8.00 – 11.00 No.2
		0196	see p. 12 SCOPE > Fixed Edges > 8.00 – 11.00 No.3
		0197	see p. 12 SCOPE > Fixed Edges > 11.00 – 15.00 No.1
		0198	see p. 12 SCOPE > Fixed Edges > 11.00 – 15.00 No.2
		0199	see p. 12 SCOPE > Fixed Edges > 11.00 – 15.00 No.3
		0200	see p. 12 SCOPE > Fixed Edges > 15.00 – 20.00 No.1
		0201	see p. 12 SCOPE > Fixed Edges > 15.00 – 20.00 No.2
		0202	see p. 12 SCOPE > Fixed Edges > 15.00 – 20.00 No.3
		0203	see p. 12 SCOPE > Fixed Edges > 20.00 – 22.00 No.1
		0204	see p. 12 SCOPE > Fixed Edges > 20.00 – 22.00 No.2
		0205	see p. 12 SCOPE > Fixed Edges > 20.00 – 22.00 No.3
		0206	see p. 12 SCOPE > Fixed Edges > 22.00 – 26.00 No.1
		0207	see p. 12 SCOPE > Fixed Edges > 22.00 – 26.00 No.2
		0208	see p. 12 SCOPE > Fixed Edges > 22.00 – 26.00 No.3
		0209	see p. 12 SCOPE > Fixed Edges > 26.00 – 30.00 No.1
		0210	see p. 12 SCOPE > Fixed Edges > 26.00 – 30.00 No.2
		0211	see p. 12 SCOPE > Fixed Edges > 26.00 – 30.00 No.3
		0212	see p. 12 SCOPE > Fixed Edges > 30.00 – 45.00 No.1
		0213	see p. 12 SCOPE > Fixed Edges > 30.00 – 45.00 No.2
		0214	see p. 12 SCOPE > Fixed Edges > 30.00 – 45.00 No.3
		0215	see p. 12 SCOPE > Fixed Edges > 45.00 – 60.00 No.1
		0216	see p. 12 SCOPE > Fixed Edges > 45.00 – 60.00 No.2
		0217	see p. 12 SCOPE > Fixed Edges > 45.00 – 60.00 No.3
		0218	00 or 01 AUDIO SCOPE SET > FFT Scope Waveform Type (00=Line, 01=Fill)
		0219	see p. 12 AUDIO SCOPE SET > FFT Scope Waveform Color
		0220	00 or 01 AUDIO SCOPE SET > FFT Scope Waterfall Display (00=OFF, 01=ON)
		0221	see p. 12 AUDIO SCOPE SET > Oscilloscope Waveform Color
		0222	00 ~ 04 KEYER 001 > Number Style (00=Normal, 01=190→ANT, 02=190→NO, 03=90→NO, 04=90→NT)
		0223	01 ~ 08 KEYER 001 > Count Up Trigger (01=M1 ~ 08=M8)
		0224	0001 ~ 9999 KEYER 001 > Present Number (0001=1 ~ 9999=9999)
		0225	0000 ~ 0255 CW-KEY SET > Side Tone Level (0000=0% ~ 0255=100%)
		0226	00 or 01 CW-KEY SET > Side Tone Level Limit (00=OFF, 01=ON)
		0227	01 ~ 60 CW-KEY SET > Keyer Repeat time (01=1 sec. ~ 60=60 sec.)
		0228	28 ~ 45 CW-KEY SET > Dot/Dash Ratio (28=1:1.2:8 ~ 45=1:1.4:5; 0.1 steps)

Remote control

◇ Command table (Continued)

Cmd.	Sub cmd.	Data	Description
1A*	05	0229 00 ~ 03	CW-KEY SET > Rise Time (00=2 msec., 01=4 msec., 02=6 msec., 03=8 msec.)
		0230 00 or 01	CW-KEY SET > Paddle Polarity (00=Normal, 01=Reverse)
		0231 00 ~ 02	CW-KEY SET > Key Type (00=Straight, 01=Bug, 02=Paddle)
		0232 00 or 01	CW-KEY SET > MIC Up/Down Keyer (00=OFF, 01=ON)
		0233 00 ~ 03	RTTY DECODE SET > FFT Scope Averaging (00=OFF, 01=2, 02=3, 03=4)
		0234 see p. 12	RTTY DECODE SET > FFT Scope Waveform Color
		0235 00 or 01	RTTY DECODE SET > Decode USOS (00=OFF, 01=ON)
		0236 00 or 01	RTTY DECODE SET > Decode New Line Code (00=CR, LF, CR+LF, 01=CR+LF)
		0237 00 ~ 02	RTTY DECODE SET > Diddle (00=OFF, 01=BLANK, 02=LTRS)
		0238 00 or 01	RTTY DECODE SET > TX USOS (00=OFF, 01=ON)
		0239 00 or 01	RTTY DECODE SET > Auto CR+LF by TX (00=OFF, 01=ON)
		0240 00 or 01	RTTY DECODE SET > Time Stamp (00=OFF, 01=ON)
		0241 00 or 01	RTTY DECODE SET > Time Stamp (Time) (00=Local, 01="CLOCK2 UTC Offset" setting)
		0242 00 or 01	RTTY DECODE SET > Time Stamp (Frequency) (00=OFF, 01=ON)
		0243 see p. 12	RTTY DECODE SET > Font Color (Receive)
		0244 see p. 12	RTTY DECODE SET > Font Color (Transmit)
		0245 see p. 12	RTTY DECODE SET > Font Color (Time Stamp)
		0246 see p. 12	RTTY DECODE SET > Font Color (TX Buffer)
		0247 00 or 01	RTTY DECODE LOG > Decode Log (00=OFF, 01=ON)
		0248 00 or 01	RTTY DECODE LOG > Log Set > File Type (00=Text, 01=HTML)
		0249 00 ~ 03	PSK DECODE SET > FFT Scope Averaging (00=OFF, 01=2, 02=3, 03=4)
		0250 see p. 12	PSK DECODE SET > FFT Scope Waveform Color
		0251 00 or 01	PSK DECODE SET > AFC Range (00=±8 Hz, 01=±15 Hz)
		0252 00 or 01	PSK DECODE SET > Time Stamp (00=OFF, 01=ON)
		0253 00 or 01	PSK DECODE SET > Time Stamp (Time) (00=Local, 01="CLOCK2 UTC Offset" setting)
		0254 00 or 01	PSK DECODE SET > Time Stamp (Frequency) (00=OFF, 01=ON)
		0255 see p. 12	PSK DECODE SET > Font Color (Receive)
		0256 see p. 12	PSK DECODE SET > Font Color (Transmit)
		0257 see p. 12	PSK DECODE SET > Font Color (Time Stamp)
		0258 see p. 12	PSK DECODE SET > Font Color (TX Buffer)
		0259 00 or 01	PSK DECODE LOG > Decode Log (00=OFF, 01=ON)
		0260 00 or 01	PSK DECODE LOG > Log Set > File Type (00=Text, 01=HTML)
		0261 00 or 01	SCAN SET > SCAN Speed (00=Slow, 01=Fast)
		0262 00 or 01	SCAN SET > SCAN Resume (00=OFF, 01=ON)
		0263 0000 ~ 0255	VOICE TX > TX LEVEL (0000=0%, 0255=100%)
		0264 00 or 01	VOICE TX SET > Auto Monitor (00=OFF, 01=ON)
		0265 01 ~ 15	VOICE TX SET > Repeat Time (01=1 sec. ~ 15=15 sec.)
		0266 00 or 01	Recorder Set > REC Mode (00=TX&RX, 01=RX Only)
		0267 00 or 01	Recorder Set > TX REC Audio (00=Direct, 01=Monitor)
		0268 00 or 01	Recorder Set > RX REC Condition (00=Always, 01=Squelch Auto)
		0269 00 or 01	Recorder Set > File Split (00=OFF, 01=ON)

Cmd.	Sub cmd.	Data	Description
1A*	05	0270 00 or 01	Recorder Set > PTT Auto REC (00=OFF, 01=ON)
		0271 00 ~ 03	Recorder Set > PRE-REC for PTT Auto REC (00=OFF, 01=5 sec., 02=10 sec., 03=15 sec.)
		0272 00 ~ 03	Player Set > Skip Time (00=3 sec., 01=5 sec., 02=10 sec., 03=30 sec.)
		0273 05 ~ 30	Instant Replay Set > REC Time (05=5 sec., ~ 30=30 sec.)
		0274 03 ~ 10	Instant Replay Set > Play Time (03=3 sec., ~ 10=10 sec.)
		0275 00 or 01	TYPE SET > RX-ANT Connectors (00=Connect an receive antenna, 01=Connect an external device)
		0276 see p. 13	ANTENNA MEMORY (0.03 MHz ~ 1.60 MHz)
		0277 see p. 13	ANTENNA MEMORY (1.60 MHz ~ 2.00 MHz)
		0278 see p. 13	ANTENNA MEMORY (2.00 MHz ~ 6.00 MHz)
		0279 see p. 13	ANTENNA MEMORY (6.00 MHz ~ 8.00 MHz)
		0280 see p. 13	ANTENNA MEMORY (8.00 MHz ~ 11.00 MHz)
		0281 see p. 13	ANTENNA MEMORY (11.00 MHz ~ 15.00 MHz)
		0282 see p. 13	ANTENNA MEMORY (15.00 MHz ~ 20.00 MHz)
		0283 see p. 13	ANTENNA MEMORY (20.00 MHz ~ 22.00 MHz)
		0284 see p. 13	ANTENNA MEMORY (22.00 MHz ~ 26.00 MHz)
		0285 see p. 13	ANTENNA MEMORY (26.00 MHz ~ 30.00 MHz)
		0286 see p. 13	ANTENNA MEMORY (30.00 MHz ~ 45.00 MHz)
		0287 see p. 13	ANTENNA MEMORY (45.00 MHz ~ 60.00 MHz)
		0288 00 or 01	Temporary memory (TEMP-M) function (00=OFF, 01=ON)
		0289 00 ~ 02	Send the Antenna selection mode ([ANT] SW) (00=OFF, 01=Manual, 02=Auto)
		0290 00 ~ 09	NB depth (00=1 ~ 09=10)
		0291 0000 ~ 0255	NB width (0000=1 ~ 0255=100)
		0292 00 ~ 20	VOX delay (00=0.0 sec. ~ 20=2.0 sec.; 0.1 sec steps)
		0293 00 ~ 03	VOX voice delay (00=OFF, 01=Short, 02=Mid, 03=Long)
		0294 00 or 01	APF > TYPE (00=SHARP, 01=SOFT)
		0295 00 ~ 06	APF > AF LEVEL (00=0 dB ~ 06=6 dB)
		0296 see p. 12	Tone Control/TBW > TX > SSB-D TX passband width
		0297 00 or 01	Connectors > USB SEND/Keying Inhibit Timer at USB connection (00=OFF, 01=ON)
		0298 see p. 12	SCOPE > Fixed Edges > 0.03 ~ 1.60 No.4
		0299 see p. 12	SCOPE > Fixed Edges > 1.60 ~ 2.00 No.4
		0300 see p. 12	SCOPE > Fixed Edges > 2.00 ~ 6.00 No.4
		0301 see p. 12	SCOPE > Fixed Edges > 6.00 ~ 8.00 No.4
		0302 see p. 12	SCOPE > Fixed Edges > 8.00 ~ 11.00 No.4
		0303 see p. 12	SCOPE > Fixed Edges > 11.00 ~ 15.00 No.4
		0304 see p. 12	SCOPE > Fixed Edges > 15.00 ~ 20.00 No.4
		0305 see p. 12	SCOPE > Fixed Edges > 20.00 ~ 22.00 No.4
		0306 see p. 12	SCOPE > Fixed Edges > 22.00 ~ 26.00 No.4
		0307 see p. 12	SCOPE > Fixed Edges > 26.00 ~ 30.00 No.4
		0308 see p. 12	SCOPE > Fixed Edges > 30.00 ~ 45.00 No.4
		0309 see p. 12	SCOPE > Fixed Edges > 45.00 ~ 60.00 No.4
	06	see p. 12	DATA mode with filter set
	07	00 or 01	NTP server access (00=Terminate, 01=Initiate)
	08*5	00 ~ 02	Read NTP server access result (00=Accessing, or have not accessed after Power ON, 01=Succeeded, 02=Failed)
	09 29	00 or 01	AF Mute (00=OFF, 01=ON)
	0A 29	00 or 01	Read the OVF indicator status (00=OFF, 01=ON)
1B*	00	see p. 13	Repeater tone frequency
29	01	see p. 13	TSQL tone frequency

Remote control

◇ Command table (Continued)

Cmd.	Sub cmd.	Data	Description
1C	00* ¹	00 or 01	Transceiver's status (00=RX, 01=TX) *When "CI-V Output (for ANT)" (Command: 1C 04) is set to "ON," automatically outputs when changed.
	01* ¹	00 ~ 02	Antenna tuner (00=OFF, 01=ON, 02=Tune)
	02* ¹	00 or 01	Transmit frequency monitor (XFC) (00=OFF, 01=ON)
	03	see p. 10	Read transmit frequency (When "CI-V Output (for ANT)" (Command: 1C 04) is set to "ON," automatically outputs when changed.)
	04* ¹	00 or 01	CI-V Output (for ANT) (00=OFF, 01=ON)
1E	00		Read number of available TX frequency band
	01	see p. 10	Read TX band edge frequencies
	02		Read number of user-set TX frequency band
	03*	see p. 10	Send/read user-set TX band edge frequencies
21*	00	see p. 13	RIT frequency
	01	00 or 01	RIT setting (00=OFF, 01=ON)
	02	00 or 01	ΔTX setting (00=OFF, 01=ON)
25*		see p. 13	Send/read the main or sub band frequency
26*		see p. 13	Send/read the operating mode and filter setting (for both Main and Sub bands)
27*	00	see p. 14	Read the Scope waveform data • Only when "Scope ON/OFF status" (Command: 27 10) and "Scope data output" (Command: 27 11) are set to "ON," outputs the waveform data to the controller.
	10	00 or 01	Scope ON/OFF status (00=OFF, 01=ON)
	11* ⁷	00 or 01	Scope wave data output (00=OFF, 01=ON)
	12	00 or 01	Main or Sub scope setting (00=Main, 01=Sub)
	13	00 or 01	Single/Dual scope setting (00=Single, 01=Dual)
	14	see p. 14	Scope Center mode, Fixed mode, SCROLL-C mode, or SCROLL-F mode setting
	15	see p. 14	Span setting in the Center mode or SCROLL-C mode Scope
	16	see p. 14	Edge number setting in the Fixed mode or SCROLL-F mode Scope
	17	see p. 14	Scope hold function ON or OFF
	19	see p. 15	Scope Reference level setting
	1A	see p. 15	Sweep speed setting
	1B	00 or 01	SCOPE > Scope during Tx (CENTER TYPE) (00=OFF, 01=ON)
	1C	00 ~ 02	SCOPE > CENTER Type Display (00=Filter center, 01=Carrier point center, 02=Carrier point center (Abs. Freq.))
	1D	see p. 15	Scope VBW setting
	1E	see p. 15	Scope Fixed edge frequencies
	1F	see p. 15	Scope RBW setting
	20	00 or 01	Marker Position (FIX Type/SCROLL Type) setting (00=Filter Center, 01=Carrier Point)
28		00 ~ 08	Voice TX Memory (00=Stop, 01=T1 ~ 08=T8)
29		00 or 01 + Supported commands see p. 15	Regardless of active/inactive the Main or Sub band, you can directly specify the Main or Sub band, and send/read the supported command settings. (00=MAIN, 01=SUB)

*Send/read data

② Command 29 supported.

*1 If the Antenna Type is set to "RX-I/O," command "01 (RX ANT ON)" is invalid and "00 (RX ANT OFF)" is always returned.

*2 If the Antenna Type is set to "RX-ANT," command "01 (ON)" is invalid and "00 (OFF)" is always returned.

*3 In the CW mode, if the [TRANSMIT] or an external TX switch is ON, or the Break-in function is ON, a message will be transmitted as CW code when you send it from your PC.

*4 When sending the power ON command (18 01), you need to repeatedly send "FE" before the standard format. The following is the approximate number of needed repetitions.

- 115200 bps: 150 "FE"s
- 57600 bps: 75 "FE"s
- 38400 bps: 50 "FE"s
- 19200 bps: 25 "FE"s
- 9600 bps: 13 "FE"s
- 4800 bps: 7 "FE"s

Example: When using 4800 bps

		Preamble		7610's address		Controller's address		Command		Sub command		Postamble			
F	E	F	E	F	E	9	8	E	0	1	8	0	1	F	D

×7

*5 Read only data

*6 To insert a counter, first clear the other channel's counter.

*7 When you use the [USB 1] port, you need to select "Unlink from [REMOTE]" in the "CI-V USB port" item, and you need to select "115200" in the "CI-V Baud Rate" item.

MENU » **SET > Connectors > CI-V**


You can use the [LAN] port, regardless of those settings. You cannot use the [REMOTE] terminal, regardless of those settings.

Remote control

◇ Command formats (Continued)

• Memory content


Command: 1A 00



①, ② Memory channel numbers

0001 ~ 0099: Memory channel 01 ~ 99
 0100: Programmed scan edge P1
 0101: Programmed scan edge P2

③ Select memory setting

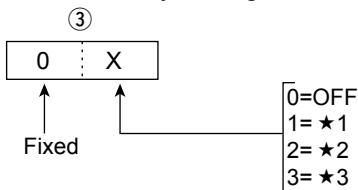


① Set 0 for P1 and P2.

④ ~ ⑧ Operating frequency setting
 See “• Operating frequency.”

⑨, ⑩ Operating mode setting
 See “• Operating mode.”

⑪ Data mode and tone type settings

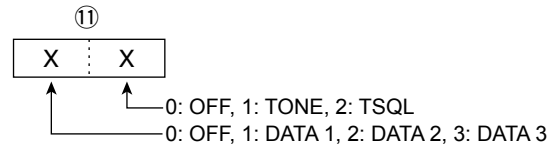

⑫ ~ ⑭ Repeater tone frequency setting
 ⑮ ~ ⑰ Tone squelch frequency setting
 See “• Repeater tone/tone squelch settings.”

⑱ ~ ㉔ Memory name settings
 Up to 10 characters.
 See “• Codes for character entries.”

To clear the memory channel contents on 1A 00:

- ①, ②: Memory channel (0001~0099)
- ③: “FF”
- ④: None

• Codes for character entries

Command: 1A 00, 1A 05 0133, 0140, 0155, 0161, 0165

- Character codes— Letters and Numbers

Character	ASCII code	Character	ASCII code
A-Z	41-5A	a-z	61-7A
0-9	30-39		

- Character codes— Symbols

Character	ASCII code	Character	ASCII code
!	21	#	23
\$	24	%	25
&	26	\	5C
?	3F	”	22
,	27	`	60
^	5E	+	2B
-	2D	*	2A
/	2F	.	2E
,	2C	:	3A
;	3B	=	3D
<	3C	>	3E
(28)	29
[5B]	5D
{	7B	}	7D
	7C	_	5F
~	7E	@	40

Command	Set item/selectable characters
1A 00	Memory name All characters are usable.
1A 05 0133	Network > Network Name (up to 15 characters)
0140	Network > Network Radio Name (up to 16 characters)
0155	Display > My Call (up to 10 characters)
0161	Time Set > Date/Time > NTP Server Address
0165	Time Set > CLOCK2 Name (up to 3 characters)

Remote control

◇ Command formats (Continued)

• Memory key character entries


Command: 1A 02

- Character codes

Character	ASCII code	Description
0 ~ 9	30 ~ 39	Numbers
A ~ Z	41 ~ 5A	Letters
space	20	Word space
/	2F	Symbol
?	3F	Symbol
,	2C	Symbol
.	2E	Symbol
@	40	Symbol
^	5E	Example: to send \overline{BT} , enter ^4254
*	2A	Inserts contest number (can be used for 1 channel only)

• Memory key content

Command: 1A 02




② ~ ⑦: Text data

①: Channel data

- 01: M1 05: M5
- 02: M2 06: M6
- 03: M3 07: M7
- 04: M4 08: M8

• UTC Offset setting


Command: 1A 05 0162, 0164



Shift direction
00: + (plus)
01: - (minus)
Offset time
0000 ~ 1400

• Antenna memory settings

Command: 1A 05 0276 ~ 1A 05 0287




① ANT1/ANT2	② RX-ANT or RX-I/O
00: ANT 1	00: RX-ANT or RX-I/O OFF
01: ANT 2	00: RX-ANT or RX-I/O ON*

*Depending on the selected antenna type.


• RIT frequency settings

Command: 21 00

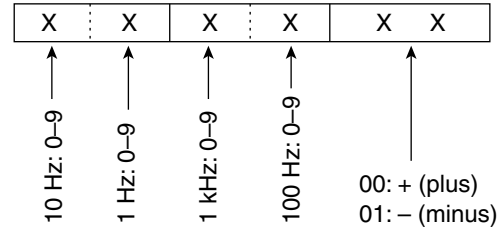

• Repeater tone/tone squelch frequency settings


Command: 1B 00, 1B 01

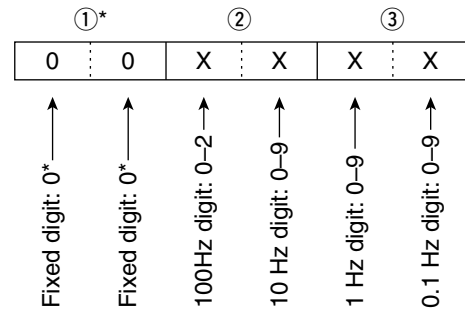

*Not necessary when setting a frequency.

• Main or Sub band's frequency settings

Command: 25




00: MAIN Operating frequency data (See p. 10)
01: SUB

• Main or Sub band's operating mode and filter settings

Command: 26

Both data and filter settings can be skipped. In that case, "DATA OFF" and the default filter setting of the operating mode are automatically selected.

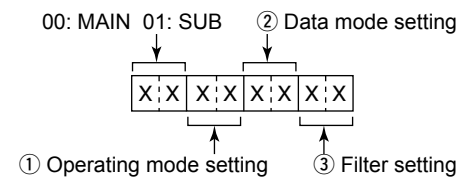

① Operating mode	② Data mode setting	③ Filter setting
00: LSB	05: FM	00: Data mode OFF
01: USB	07: CW-R	01: Data mode 1 (D1)
02: AM	08: RTTY-R	02: Data mode 2 (D2)
03: CW	12: PSK	03: Data mode 3 (D3)
04: RTTY	13: PSK-R	


Remote control

◇ Command formats (Continued)

• Scope waveform data

Command: 27 00

Outputs the waveform data to the controller



- ① Main or Sub scope data
 - 00=Main scope, 01=Sub scope
- ② Order of division data (Current)
- ③ Division number (01 or 15)


When data is sent to the controller through the LAN port, all data is sent together. However, when the data is sent through the USB port, the data is divided by 15 and sent in sequential order.

	Division number	Data length	
LAN	01	704	
USB	15	1st data	15
		2nd or later data	53
		15th data	42

The 1st data sends only the wave information (① ~ ⑥) without the waveform data (⑦).
The 2nd or later data sends the minimum wave information (① ~ ③) with waveform data (⑦).

- ④ Spectrum scope mode data:
 - 00 = Center mode scope
 - 01 = Fixed mode scope
 - 02 = SCROLL-C mode scope
 - 03 = SCROLL-F mode scope

- ⑤ Waveform information:
 - The waveform information differs, depending on the Spectrum scope mode.
 - In the Center mode:
 - Center frequency and span are sent.
 - See page 10 for Operating frequency data, and the Scope span settings to the right.
 - In the Fixed, SCROLL-C, and SCROLL-F modes:
 - Lower edge and higher edge frequencies are sent.

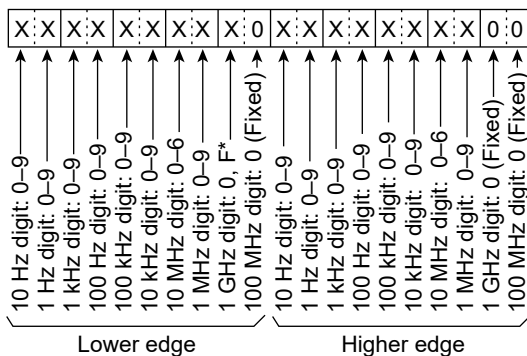

* "F" means that the Lower edge frequency is a negative value.

- ⑥ Out of range information

- 00 = In range
- 01 = Out of range

① If the scope data is out of range, the waveform data (⑦) is omitted.


- ⑦ Waveform data

The transceiver outputs the drawn waveform data. The data range or data length of the waveform data is judged by the controller. (The data range is basically the same as the display size of the scope on the controller.)

- Data range: 0 ~ 200
- Data length: 689

• Spectrum scope mode settings


Command: 27 14

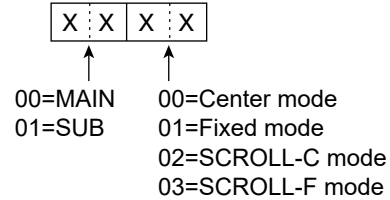

• Scope span settings

(in the Center mode and SCROLL-C mode Scope)


Command: 27 15

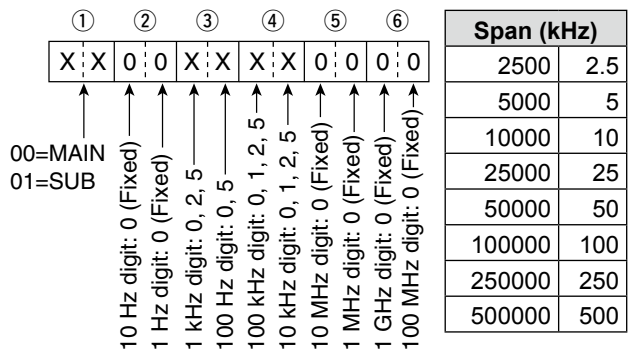

• Scope Edge number settings


(in the Fixed mode and SCROLL-F mode Scope)

Command: 27 16

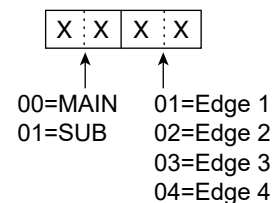

• Scope Hold settings

Command: 27 17

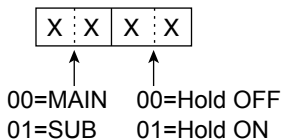

Count on us!

