OPERATING GUIDE

RoIP GATEWAY

VE-PG4

INTRODUCTION

1 TOP

2 INFORMAITON

3 NETWORK SETTINGS

4 ROUTER SETTINGS

5 BRIDGE CONNECTION SETTINGS

6 TRANSCEIVER CONTROLLER

7 CONNECTION PORT SETTINGS

8 DESTINATION SETTINGS

9 EXPERT SETTINGS

10 IP LINE SETTINGS

11 PBX

12 PBX TRANSCEIVER CALL SETTINGS

13 PBX EXTENSION

14 PBX ADVANCED SETTINGS

15 MANAGEMENT

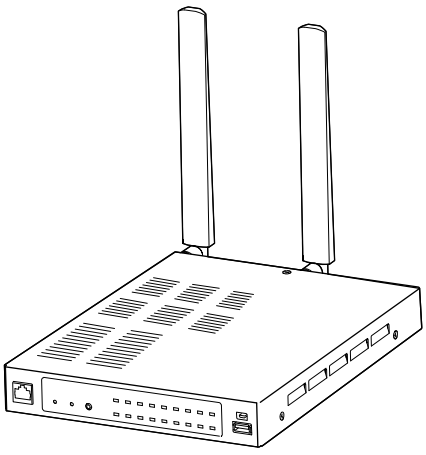

Icom Inc.

Thank you for choosing this Icom product. The VE-PG4 RoIP GATEWAY is designed and built with Icom's IP network technology.
With proper care, this product should provide you with years of trouble-free operation.

ⓘ This document is described based on the VE-PG4 firmware version 1.71.

Icom is not responsible for the destruction, damage to, or performance of any Icom or non-Icom equipment, if the malfunction is because of:
- Force majeure, including, but not limited to, fires, earthquakes, storms, floods, lightning, other natural disasters, disturbances, riots, war, or radioactive contamination.
- The use of Icom device with any equipment that is not manufactured or approved by Icom.

ALL RIGHTS RESERVED. This document contains material protected under International and Domestic Copyright Laws and Treaties. Any unauthorized reprint or use of this material is prohibited. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system without express written permission from Icom Incorporated.
All stated specifications and design are subject to change without notice or obligation.

Icom and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand, and/or other countries.
AMBE+2 is a trademark of Digital Voice Systems, Inc.
Microsoft and Windows are trademarks of the Microsoft group of companies.
3M, PELTOR, and WS are trademarks of 3M Company.
The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Icom Inc. is under license.
All other products or brands are registered trademarks or trademarks of their respective holders.

■ Voice coding technology

The AMBE+2™ voice coding Technology embodied in this product is protected by intellectual property rights including patent rights, copyrights and trade secrets of Digital Voice Systems, Inc. This voice coding Technology is licensed solely for use within this Communications Equipment.
The user of this Technology is explicitly prohibited from attempting to extract, remove, decompile, reverse engineer, or disassemble the Object Code, or in any other way convert the Object Code into a human-readable form.
U.S. Patent No.: #8,359,197.

ABOUT THE CONSTRUCTION OF THE MANUAL

You can use the following manuals to understand and operate this RoIP Gateway.

Precautions (Comes with the RoIP Gateway)
Instructions for the connections, initialization, and precautions.

Installation guide (PDF type)
Instructions for the system requirements, the system setup basics, maintenance, and the specifications.
It can be downloaded from the Icom website.

Operating guide (This manual, PDF type)
The detailed references for the settings on the RoIP Gateway setting screen.
It can be downloaded from the Icom website.

Also refer to the manual for each device, that is connected to your system.

TOP

Section 1

TOP screen 1-2
■ System Status 1-2
■ MAC Address 1-2
■ WAN Status 1-3
■ LTE Status 1-3

TOP screen

TOP

■ System Status

Displays the firmware version, Date and Time, uptime, and memory usage.

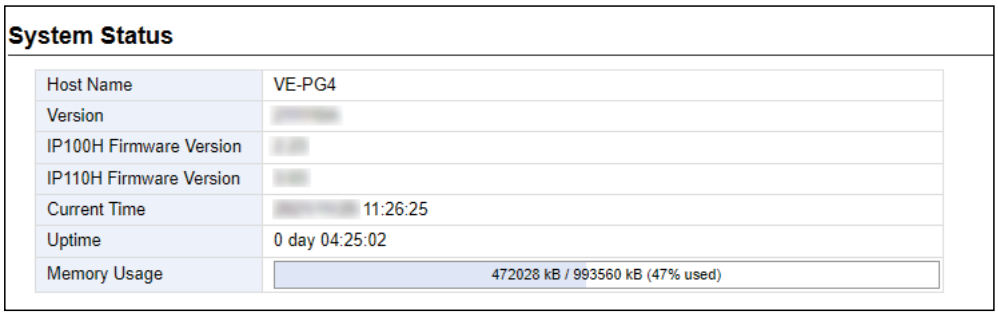

ⓘ See “Transceiver Management” screen in this manual for details on the firmware version of each WLAN transceiver that is registered to the RoIP server. (Transceiver Controller > Transceiver Settings > Transceiver Management)

TOP

■ MAC Address

Displays the MAC Address (LAN/WAN.)

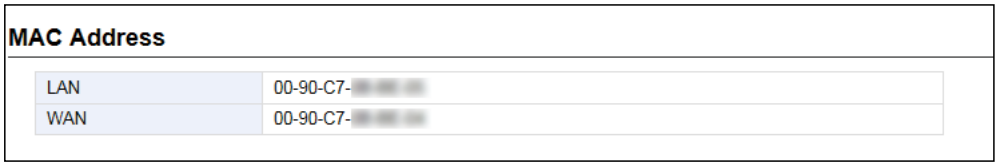

ⓘ The MAC address is the peculiar number that is assigned to a networking device. It is displayed in 12 hexadecimal (00-90-C7-XX-XX-XX).
ⓘ The MAC address is also printed on the label on the bottom of the RoIP gateway.

TOP screen

TOP

■ WAN Status

Displays the WAN connection status that is set on the “WAN” screen setting in the Router Settings menu. (Router Settings > WAN)

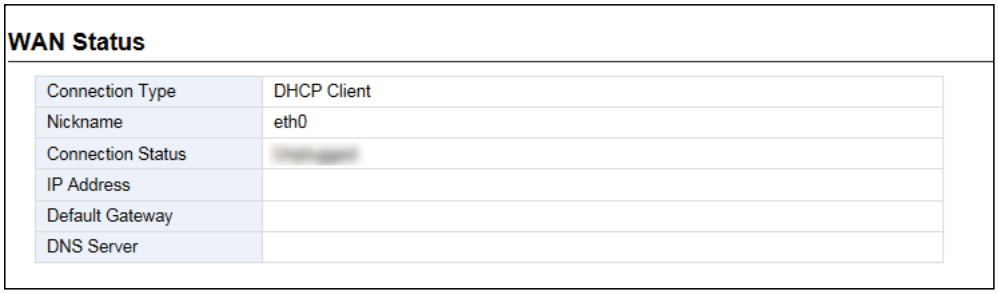

TOP

■ LTE Status

Displays the LTE information, such as RSSI Level, if a nanoSIM card is installed.

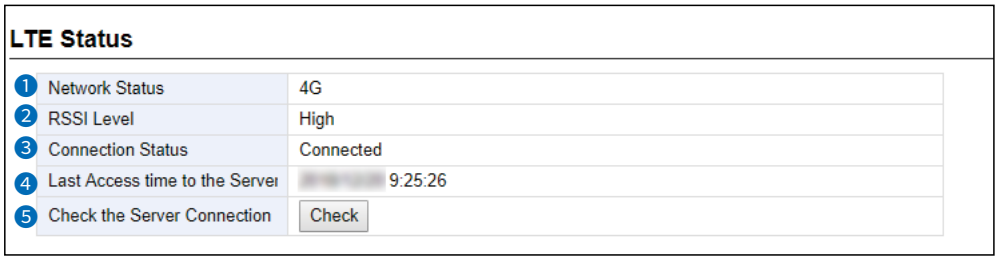

❶ Network Status ..... Displays the type of the connected telephone line, “4G” or “3G.”

❷ RSSI Level ..... Displays the approximate RSSI (Received Signal Strength Indicator) level with “High,” “Middle,” “Low,” or “Out of range.”

❸ Connection Status..... Displays the status of the 4G/3G line connection, “Initializing,” “Initialization failure,” “Connecting,” “Connected,” or “Disconnected.”

❹ Last Access time to the Server Displays the last accessed date and time to the transceiver controller.
ⓘ The date and time in the list displayed here are acquired from the transceiver module.

❺ Check the Server Connection Click <Check> to check the connection to the IP Transceiver controller.

INFORMATION

Section 2

Network Status screen 2-2
- ■ Interface List 2-2
- ■ Ethernet Port Connection Status 2-2
- ■ DHCP Lease Status 2-2

SYSLOG screen 2-3
- ■ SYSLOG 2-3

Bridge Status screen 2-4
- ■ Bridge Status 2-4
- ■ Port Connection Status 2-5
- ■ Telephone Gateway Interconnection List 2-6

PBX Status screen 2-7
- ■ Extension Group List 2-7
- ■ List of Extensions 2-8

Call Log screen 2-9
- ■ Call Log 2-9

Extension Status screen 2-10
- ■ Extension Status 2-10

LTE Status screen 2-11
- ■ LTE Module Status 2-11
- ■ SIM Status 2-11
- ■ LTE Status 2-12

Network Status screen

Information > Network Status

■ Interface List

Displays the details of the Interface Setting.
(Network Settings > Static Routing > Routing Table > Interface)

Interface List

Interface	IP Address	Subnet Mask
br-lan	192.168.0.1	255.255.255.0

Information > Network Status

■ Ethernet Port Connection Status

Displays the transfer speed and the transfer type for the Ethernet Port.
This is an example setting the WAN connection type as [LAN Port].

Ethernet Port Connection Status

Interface	MAC Address	Link Status
LAN	00-90-C7-[redacted]	1000BASE-T full-duplex
WAN / LAN		Link down

TIP:
- The RoIP Gateway's [LAN] ports are auto-negotiation enabled, and can automatically select the optimal speed and duplex mode if the peer devices are auto-negotiation enabled as well.
- We recommend that you always enable auto-negotiation on the peer devices.
  If a peer device is fixed to Full-Duplex mode, auto-negotiation enabled devices (including the RoIP Gateway) may generally take it for Half-Duplex mode, and cannot communicate properly.

Information > Network Status

■ DHCP Lease Status

Displays the IP Address and Lease Time assigned to the connected devices.

DHCP Lease Status

Host Name	MAC Address	IP Address	Lease Time
[redacted]	[redacted]	192.168.0.30	[redacted]

SYSLOG screen

Information > SYSLOG

■ SYSLOG

Displays the log of the RoIP Gateway.

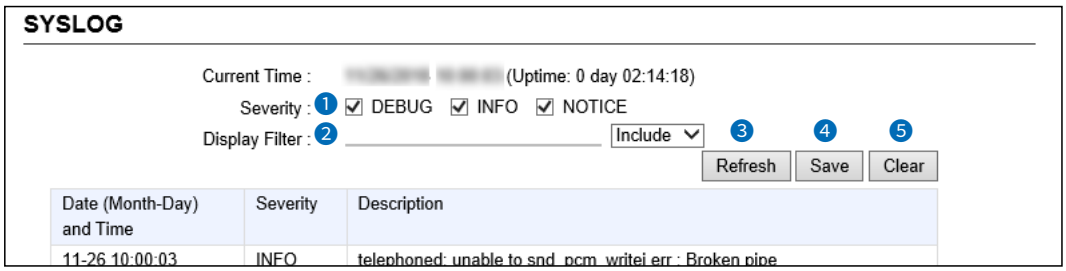

1 Severity ..... Select one or more log types that you want to list.
ⓘ Remove the check mark to hide the entries.
ⓘ The selection is not stored, and will reset when you leave this screen.

2 Display Filter ..... Enter a keyword (for example: dhcp) and select “Include” or “Exclude” to narrow down the list.

3 <Refresh> ..... Click to reload the list. Up to the last 1000 logs are listed.

4 <Save> ..... Click to save a log to a text (.txt) file.

5 <Clear> ..... Click to clear all the logs.

Bridge Status screen

Information > Bridge Status

■ Bridge Status

Displays the bridge connection status list, if a bridge destination network address is set.
(See also section 5 in this manual for the Bridge Connection.)
ⓘ The Transceiver Controller is set to each port by default.

Bridge Status

Port Name	Bridge Destination	Transmission Mode	Destination Address	Port Number		Voice Protocol	AMBE+2 Vocoder Assignment	Connection Status
				Destination	My Station			
Digital Transceiver1 (D-TRX1)	Digital Transceiver4 (D-TRX4)	-	-	-	-	-	Not Assigned	-
Digital Transceiver2 (D-TRX2)	Custom Bridge Connection	Unicast	192.168.1.200	23002	23002	Bridge Protocol	Internal	Inactive
Digital Transceiver3 (D-TRX3)	Transceiver Controller	-	-	-	-	-	Internal	-
Digital Transceiver4 (D-TRX4)	Digital Transceiver1 (D-TRX1)	-	-	-	-	-	Not Assigned	-
EXT I/O1 (EXT1)	Transceiver Controller	-	-	-	-	-	Not Assigned	-
EXT I/O2 (EXT2)	Transceiver Controller	-	-	-	-	-	Not Assigned	-
EXT I/O3 (EXT3)	Transceiver Controller	-	-	-	-	-	Not Assigned	-
EXT Input4 (EXT4)	Transceiver Controller	-	-	-	-	-	Not Assigned	-
EXT Output4 (EXT4)	Transceiver Controller	-	-	-	-	-	Not Assigned	-
Emergency Notification	Transceiver Controller	-	-	-	-	-	Not Assigned	-
Microphone (MIC)	Custom Bridge Connection	Multicast	239.255.255.1	22510	22510	G.711u	Not Assigned	Inactive
RoIP Gateway1	Transceiver Controller	-	-	-	-	-	-	-
RoIP Gateway2	Transceiver Controller	-	-	-	-	-	-	-
RoIP Gateway3	Transceiver Controller	-	-	-	-	-	-	-
RoIP Gateway4	Transceiver Controller	-	-	-	-	-	-	-
RoIP Gateway5	Transceiver Controller	-	-	-	-	-	-	-
RoIP Gateway6	Transceiver Controller	-	-	-	-	-	-	-
RoIP Gateway7	Transceiver Controller	-	-	-	-	-	-	-
RoIP Gateway8	Transceiver Controller	-	-	-	-	-	-	-

(This is only an example.)

Bridge Status screen

Information > Bridge Status

■ Port Connection Status

Displays the connection status of each port.

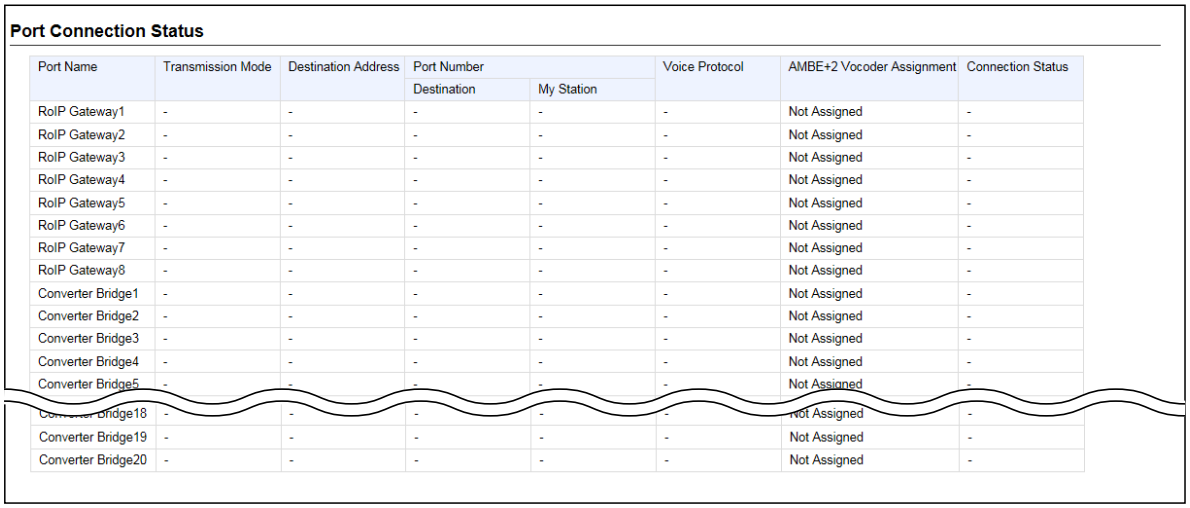

Port Connection Status

Port Name	Transmission Mode	Destination Address	Port Number		Voice Protocol	AMBE+2 Vocoder Assignment	Connection Status
			Destination	My Station			
RoIP Gateway1	-	-	-	-	-	Not Assigned	-
RoIP Gateway2	-	-	-	-	-	Not Assigned	-
RoIP Gateway3	-	-	-	-	-	Not Assigned	-
RoIP Gateway4	-	-	-	-	-	Not Assigned	-
RoIP Gateway5	-	-	-	-	-	Not Assigned	-
RoIP Gateway6	-	-	-	-	-	Not Assigned	-
RoIP Gateway7	-	-	-	-	-	Not Assigned	-
RoIP Gateway8	-	-	-	-	-	Not Assigned	-
Converter Bridge1	-	-	-	-	-	Not Assigned	-
Converter Bridge2	-	-	-	-	-	Not Assigned	-
Converter Bridge3	-	-	-	-	-	Not Assigned	-
Converter Bridge4	-	-	-	-	-	Not Assigned	-
Converter Bridge5	-	-	-	-	-	Not Assigned	-
Converter Bridge18	-	-	-	-	-	Not Assigned	-
Converter Bridge19	-	-	-	-	-	Not Assigned	-
Converter Bridge20	-	-	-	-	-	Not Assigned	-

(This is only an example.)

- RoIP Gateway 1 ~ 8 displays the status of the RoIP Gateway Connection settings.
  (Connection Port Settings > RoIP Gateway > **RoIP Gateway Connection**)
- Converter Bridge 1 ~ 20 displays the status of the Connection settings.
  (PBX Extension > Converter Bridge > **Connection**)
- Voice Protocol and the AMBE+2 Vocoder Assignment display the status of the AMBE+2 Vocoder Assignment settings.
  (Bridge Connection Setting > Bridge Connection > **AMBE+2 Vocoder Assignment**)

Bridge Status screen

Information > Bridge Status

■ Telephone Gateway Interconnection List

Displays the list of the registered Telephone Gateway Interconnections.
(Transceiver Controller > RoIP Server Settings > **Telephone Gateway Interconnect**)

Telephone Gateway Interconnection List

Port Name	Destination Address	Port Number	
		Destination	My Station
Telephone Gateway Interconnection1	192.168.0.2	23934	23334
Telephone Gateway Interconnection2	-	-	-
Telephone Gateway Interconnection3	-	-	-
Telephone Gateway Interconnection4	-	-	-

(This is only an example.)

PBX Status screen

Information > PBX Status

■ Extension Group List

Displays the Extension Group List status.

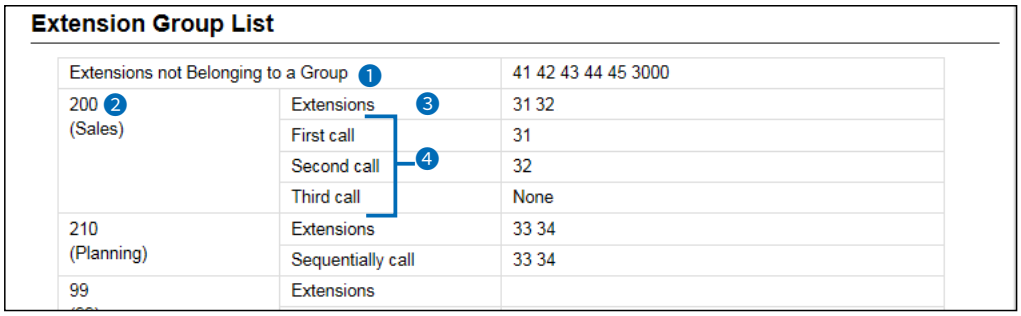

Extension Group List

Extensions not Belonging to a Group ❶		41 42 43 44 45 3000
200 ❷ (Sales)	Extensions ❸	31 32
	First call	31
	Second call ❹	32
	Third call	None
210 (Planning)	Extensions	33 34
	Sequentially call	33 34
99	Extensions	

❶ **Extensions not Belonging to a Group** ..... Displays the Extension Numbers that do not belong to any Extension Group.

❷ **Extension Group Number** Displays the Extension Group Number and its Group Name.

❸ **Extensions** ..... Displays the Extension Numbers that belongs to the Extension Group.

❹ **Setting for Extension Prioritization** ..... Displays the prior extensions to receive a call from the Extension Group Number (❷).

PBX Status screen

Information > PBX Status

■ List of Extensions

Displays the Extension settings.

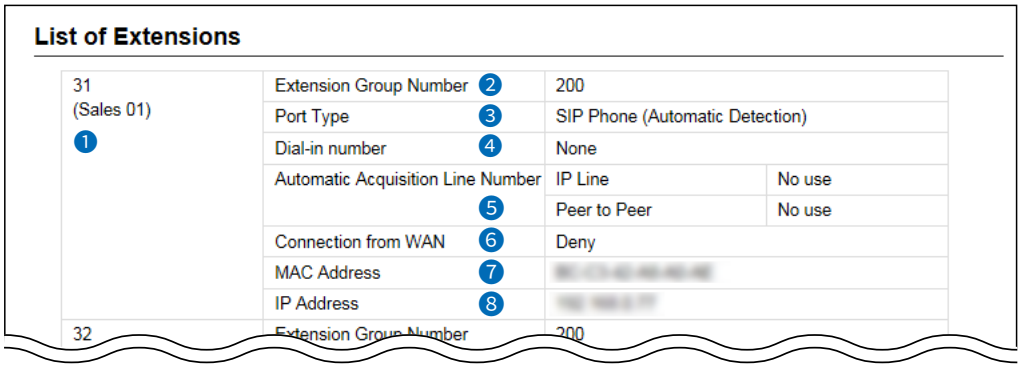

(This is only an example.)

❶ Extension Number..... Displays the Extension number and the name.
(PBX > Extension > Extension)

❷ Extension Group Number Displays the Extension Group number.
ⓘ Displays “No Extension Representative” when the Extension Numbers that do not belong to any Extension Group make a call.

❸ Port Type ..... Displays the port type of the extension.

❹ Dial-in number ..... Displays the dial-in number, if entered.

❺ Automatic Acquisition Line Number ..... Displays whether or not to automatically acquire a specific telephone line.

❻ Connection from WAN ..... Displays whether or not to allow connecting the Extension number from the WAN.

❼ MAC Address ..... Displays the MAC address of the extension.

❽ IP Address ..... Displays IP Address used by the extension.
- Displays “Disconnected” when the extension does not connect to the RoIP Gateway.
- Displays “-” when you connect to the Transceiver Controller Telephone Connection or the Converter Bridge.

Call Log screen

Information > Call Log

■ Call Log

Lists the log of the Bridge connection to the RoIP gateway and the telephone communication.

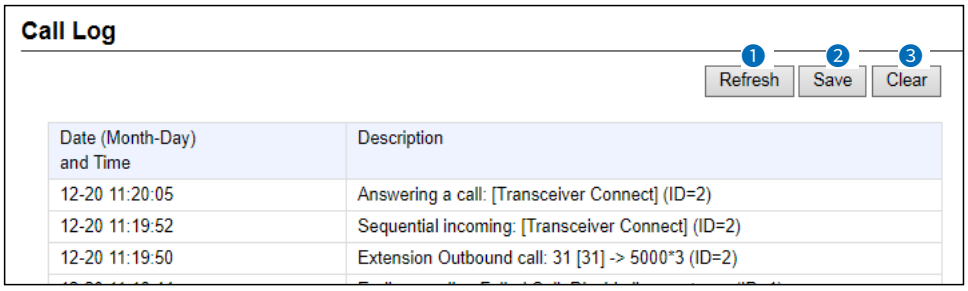

❶ **<Refresh>** ..... Click to reload the list. Up to the last 1000 logs are listed.

❷ **<Save>** ..... Click to save a log to a text (.txt) file.

❸ **<Clear>** ..... Click to delete all the logs.

Extension Status screen

Information > Extension Status

■ Extension Status

Displays the status of the Extension.
(PBX > Extension > Extension)

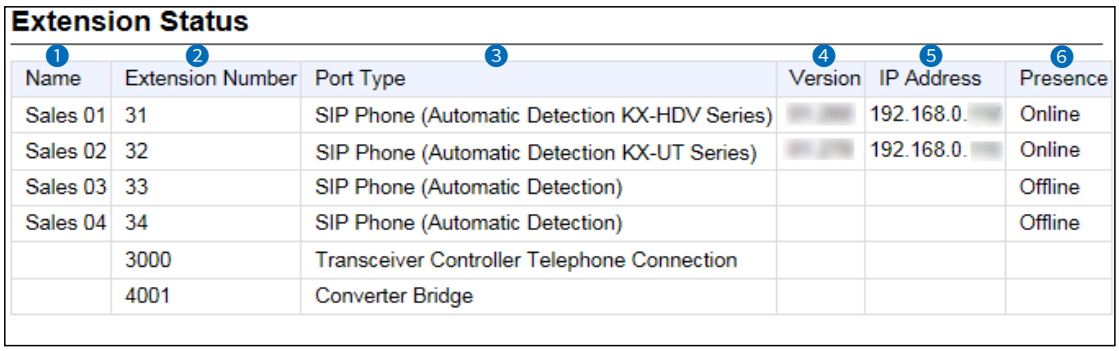

Extension Status

❶ Name	❷ Extension Number	❸ Port Type	❹ Version	❺ IP Address	❻ Presence
Sales 01	31	SIP Phone (Automatic Detection KX-HDV Series)	[redacted]	192.168.0.[redacted]	Online
Sales 02	32	SIP Phone (Automatic Detection KX-UT Series)	[redacted]	192.168.0.[redacted]	Online
Sales 03	33	SIP Phone (Automatic Detection)			Offline
Sales 04	34	SIP Phone (Automatic Detection)			Offline
	3000	Transceiver Controller Telephone Connection			
	4001	Converter Bridge			

❶ Name ..... Displays the Extension number and the name assigned to Extension settings.
(PBX > Extension > Extension)

❷ Extension Number ..... Displays the extension number assigned to Extension.
(PBX > Extension > Extension)

❸ Port Type ..... Displays the port type of the extension assigned to Extension settings.
(PBX > Extension > Extension).

❹ Version ..... Displays the Firmware information for VoIP Expansion.
ⓘ Displayed when a SIP phone is displayed to only the Port Type Setting (❸).

❺ IP Address ..... Displays the IP Address used by VoIP Expansion.
ⓘ Displayed when a SIP phone is displayed to only the Port Type Setting (❸).

❻ Presence ..... Displays the status of the VoIP Expansion.
- Offline: Not registered.
- Online*: Registered.
- On the phone*: Calling or holding.
- Step out*: Call forwarding except for the transceivers.

*Online, On the phone, and Step out is displayed when successfully registered.

ⓘ Displayed when a SIP phone is displayed to only the Port Type Setting (❸).

LTE Status screen

Information > LTE Status

■ LTE Module Status

Displays the information of the LTE communication module.



❶ **Version** ..... Displays the version of the LTE communication module.

❷ **IMEI** ..... Displays the communication module's IMEI (International Mobile Equipment Identifier.)

Information > LTE Status

■ SIM Status

Displays the information of the SIM.

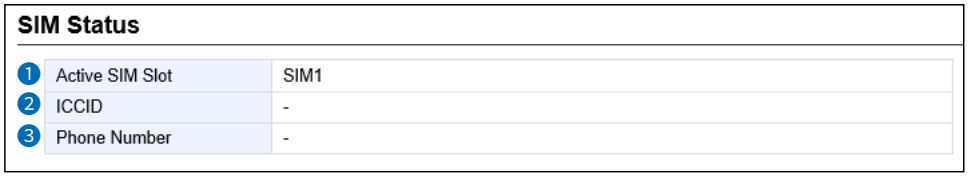

❶ **Active SIM Slot** ..... Displays the SIM slot number in use.

❷ **ICCID** ..... Displays the ICCID (IC Card IDentifier) of the installed SIM card.
ⓘ Displayed when information of Active SIM Slot Setting (❶) can be acquired.

❸ **Phone Number** ..... Displays the telephone number of the SIM card.
ⓘ Displayed when information of Active SIM Slot Setting (❶) can be acquired.

LTE Status screen

Information > LTE Status

■ LTE Status

Displays the information of the LTE line if installed and valid.

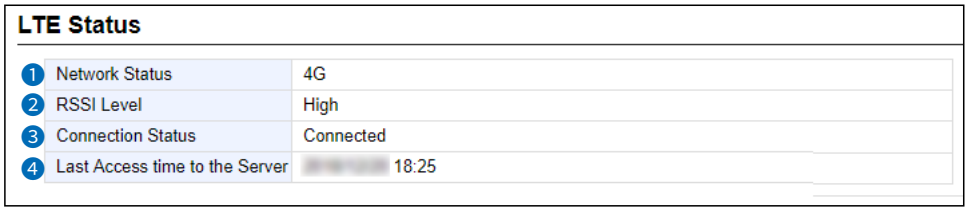

❶ Network Status ..... Displays the type of the connected telephone line, “4G” or “3G.”

❷ RSSI Level ..... Displays the approximate RSSI level, “High,” “Middle,” “Low,” or “Out of range.”

❸ Connection Status..... Displays the status of the 4G/3G line connection, “Initializing,” “Initialization failure,” “Connecting,” “Connected,” or “Disconnected.”

❹ Last Access time to the Server ..... Displays the last accessed date and time to the IP transceiver controller.

ⓘ The date and time in the list displayed here are acquired from the transceiver module.

NETWORK SETTINGS

Section 3

IP Address screen 3-2
- ■ Host Name 3-2
- ■ IP Address 3-3

DHCP Server screen 3-4
- ■ DHCP Server 3-4
- ■ Static DHCP 3-7
- ■ List of Static DHCP Settings 3-7

Static Routing Screen 3-8
- ■ Routing Table 3-8
- ■ Static Routing 3-9
- ■ List of Static Routing Entries 3-9

Policy Routing screen 3-10
- ■ Source Address Routing 3-10
- ■ List of Source Address Routing Entries 3-10

IP Address screen

Network Settings > IP Address

■ Host Name

Enter the host name.

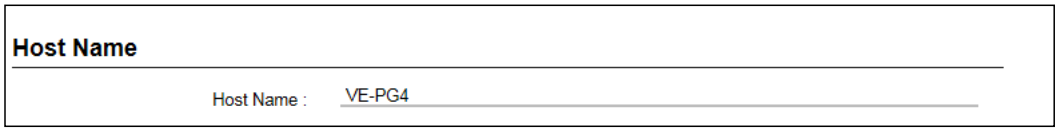

Host Name ..... Enter a host name of up to 31 characters. (Default: VE-PG4)
When the RoIP Gateway connects to Telnet/SSH, this host name is displayed.

- ⓘ The usable characters are: “a” ~ “z”, “A” ~ “Z”, “0” ~ “9”, and “-.”
- ⓘ The name must start with an alphanumeric character, and must NOT start or end with a “–.”

IP Address screen

Network Settings > IP Address

■ IP Address

Enter the VE-PG4's IP Address.

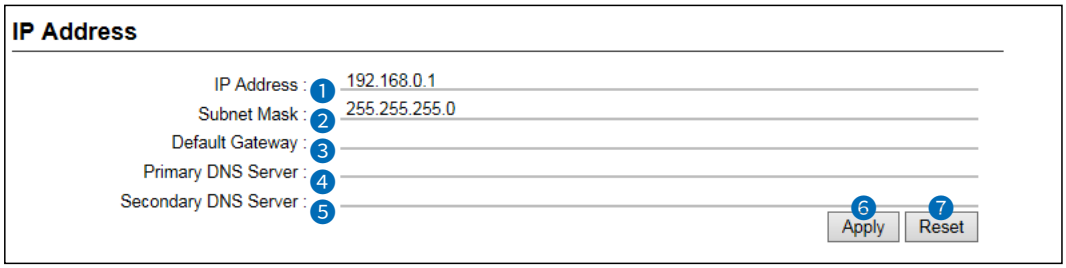

❶ IP Address ..... Enter the LAN IP address according to your network environment. (Default: 192.168.0.1)

ⓘ When using the DHCP Server function, the network part of the IP address must be the same as that set in the "IP Pool Start Address" item in the [DHCP Server] menu.

❷ Subnet Mask ..... Enter the subnet mask according to your network environment. (Default: 255.255.255.0)

❸ Default Gateway..... If a default gateway device, such as a router, is connected to the LAN port, enter the device's IP address.

❹ Primary DNS Server ..... Enter the DNS server address specified by your service provider. If you have two DNS server addresses, enter the primary address.

❺ Secondary DNS Server ... If you have two DNS server addresses, enter the secondary DNS server address.

❻ <Apply> ..... Click to apply the entries.

❼ <Reset> ..... Click to reset the settings.

ⓘ You cannot reset after clicking <Apply>.

DHCP Server screen

Network Settings > DHCP Server

■ DHCP Server

Configure the DHCP Server function.

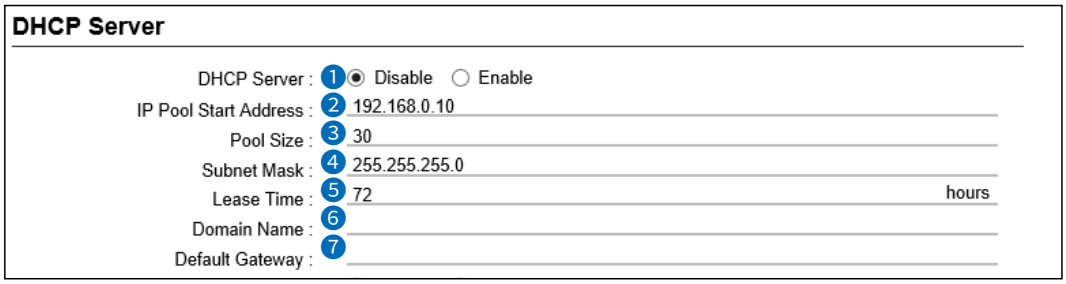

❶ DHCP Server ..... Select “Enable” to use the DHCP Server function. (Default: Disable)
The DHCP Server is activated, depending on the IP Pool Start Address (❷) and Pool Size (❸) items.

❷ IP Pool Start Address ..... Enter the IP Pool Start address. (Default: 192.168.0.10)
An IP address is automatically assigned to a transceiver that the RoIP Gateway connects to, from this IP Pool Start address.

❸ Pool Size ..... Entry the number of an IP address that can be automatically assigned. (Default: 30)
Up to 128 addresses can be automatically assigned by the DHCP server function. Another 32 addresses can be manually assigned.

❹ Subnet Mask ..... Enter the subnet mask for the IP Pool Start address set in the “IP Pool Start Address” (❷). (Default: 255.255.255.0)

❺ Lease Time ..... Enter the lease time period. (Default: 72)
Range: 1 ~ 9999 (hours)

❻ Domain Name ..... Enter a network address domain name of up to 253 characters.

❼ Default Gateway ..... Enter the default gateway IP address.
When the DHCP Server function is used, this IP address is sent to a client.
ⓘ When this item is blank, the RoIP Gateway’s IP address is sent.

DHCP Server screen

Network Settings > DHCP Server

■ DHCP Server

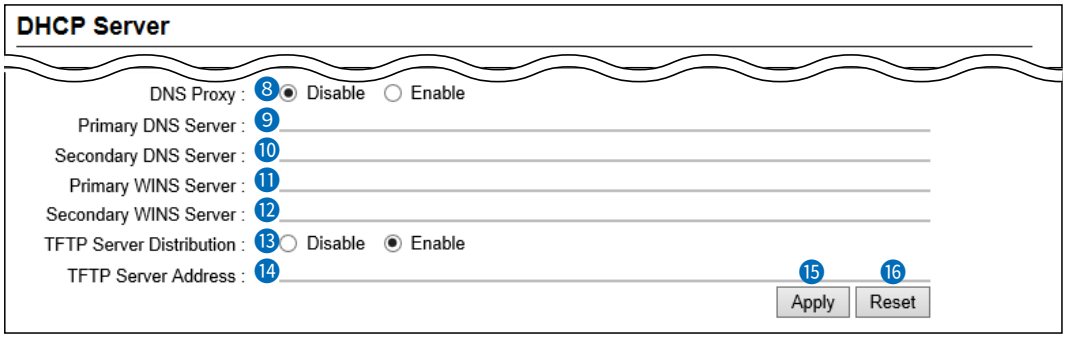

The screen above shows when “DNS Proxy” (8) is set to “Disable.”

8 DNS Proxy ..... Selects whether or not to use a DNS proxy. (Default: Enable)
When this option is set to “Enable,” the terminals can assign the RoIP Gateway as the DNS server.

9 Primary DNS Server ..... (Displayed only when the DNS Proxy (8) is disabled)
Enter the DNS server address specified by your service provider.
If you have two DNS server addresses, enter the primary address.

10 Secondary DNS Server ... (Displayed only when the DNS Proxy (8) is disabled)
If you have two DNS server addresses, enter the secondary DNS server address.

11 Primary WINS Server ..... Enter the WINS server’s address. If you have two WINS server addresses, enter the primary address.

12 Secondary WINS Server ... If you have two WINS server addresses, enter the WINS server’s secondary address.

DHCP Server screen

Network Settings > DHCP Server

■ DHCP Server

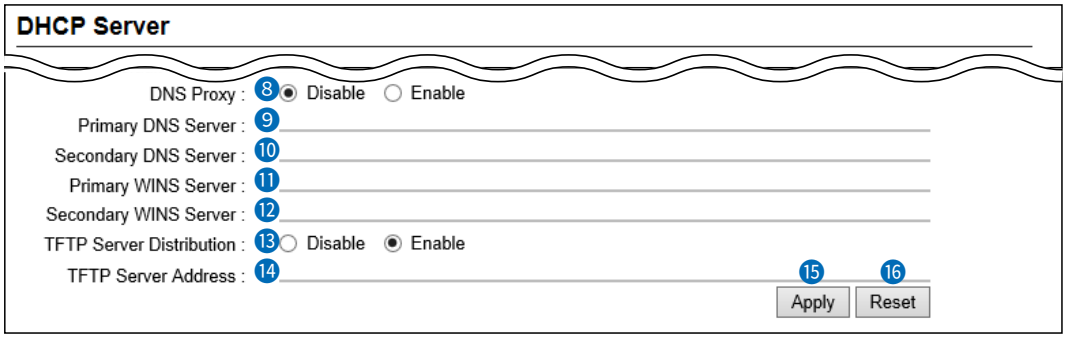

The screen above shows when “DNS Proxy” (8) is set to “Disable.”

13 TFTP Server Distribution… Set to “Enable” to use a provisioning KX Series telephone.
(Default: Enable)
When this option is enabled, the telephone automatically reads the setting from the RoIP Gateway and sets up by itself.
ⓘ The telephone’s MAC address must be entered on the “Extension” screen.
ⓘ When using this system with static IP addresses, see also Section 4 in the Installation guide.

14 TFTP Server Address …… Enter the IP address of the TFTP server for the KX series telephone.
If this item is blank, the RoIP Gateway works as the TFTP server.
(Default: Blank)

15 <Apply> …… Click to apply the entries.

16 <Reset> …… Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

DHCP Server screen

Network Settings > DHCP Server

■ Static DHCP

Enter the MAC and static IP addresses of the DHCP server.
ⓘ You can enter up to 32 entries.

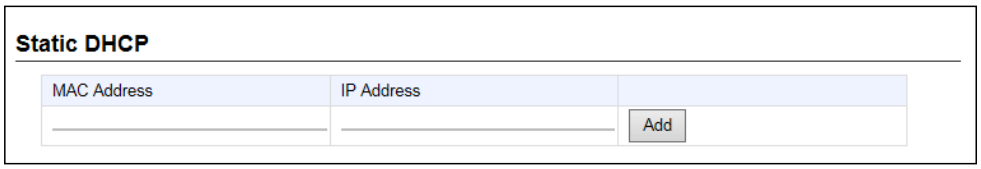

Static DHCP ..... Enter the MAC and IP addresses, and then click <Add>.
ⓘ This setting is useful when the DHCP Server function is used. See page 3-4 for details of the DHCP Server function.
ⓘ Sets a different IP address from the IP address that the DHCP Server function automatically assigns.
ⓘ Make sure that the addresses of the devices on the network do not overlap or conflict.
If a DHCP server is already connected to the network, and there is an address conflict, a network problem will occur.

■ List of Static DHCP Settings

Displays the static DHCP entries.

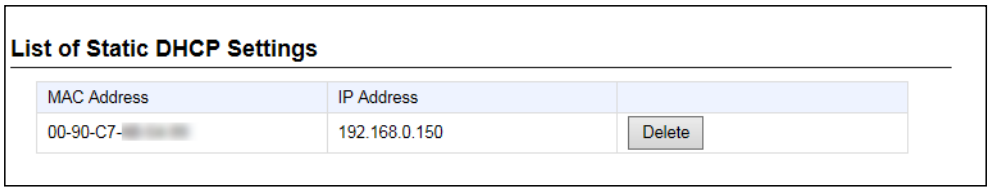

<Delete> ..... Click to delete the entry.
ⓘ You cannot restore after clicking <Delete>.

Static Routing Screen

Network Settings > Static Routing

■ Routing Table

Displays the valid routing information for packet transmission.

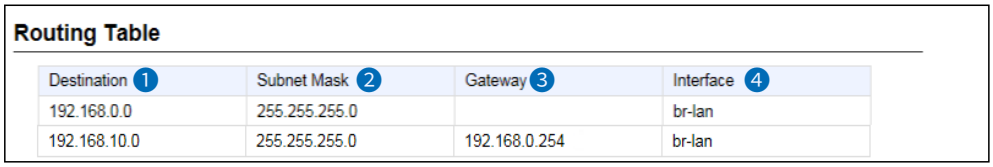

Routing Table

Destination ❶	Subnet Mask ❷	Gateway ❸	Interface ❹
192.168.0.0	255.255.255.0		br-lan
192.168.10.0	255.255.255.0	192.168.0.254	br-lan

❶ **Destination** ..... The network address of the route's destination network.

❷ **Subnet Mask** ..... The subnet mask of the route's destination network.

❸ **Gateway** ..... The route's gateway address.

❹ **Interface** ..... The routing interface.
- **br-lan:** LAN
- **eth0:** WAN
- **ppp0 ~ ppp7:** PPPoE (WAN)
- **vti0 ~ vti 31:** IPsec Tunnel

Static Routing Screen

Network Settings > Static Routing

■ Static Routing

Enter the static routing destinations.
ⓘ You can enter up to 32 entries.

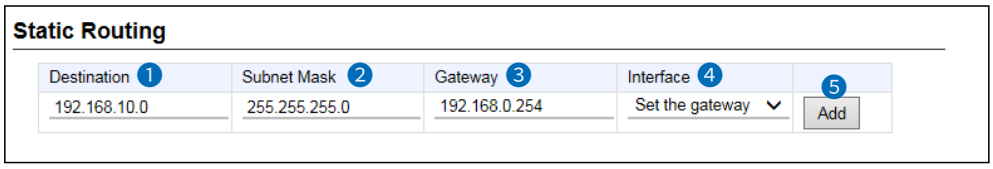

❶Destination ..... The network address of the route's destination network.

❷Subnet Mask ..... The subnet mask of the route's destination network.

❸Gateway ..... (Only when the Interface (❹) is set to "Set the gateway")
Set the route's gateway address.

❹Interface ..... The routing interface.
- Set the gateway
- ppp0 (WAN01) ~ ppp7 (WAN08)
- vti0 ~ vti 31

❺<Add> ..... Click to add the entry.
The entry that is registered in the [List of Static Routing Entries] is displayed.

■ List of Static Routing Entries

Displays the static routing destinations.
ⓘ You can enter up to 32 entries.

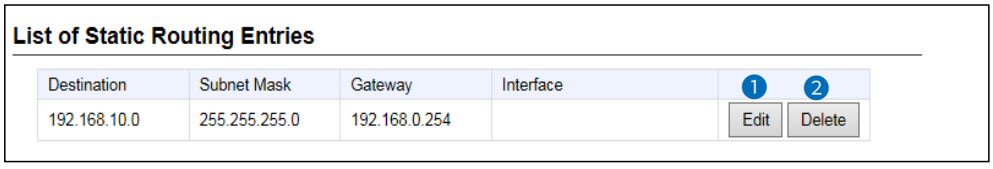

❶<Edit> ..... Click to edit the entry.

❷<Delete> ..... Click to delete the entry.
ⓘ You cannot restore after clicking <Delete>.

Policy Routing screen

Network Settings > Policy Routing

■ Source Address Routing

Enter the packet source routing from the specified network address of the source terminal (such as a PC.)
ⓘ You can enter up to 32 entries.

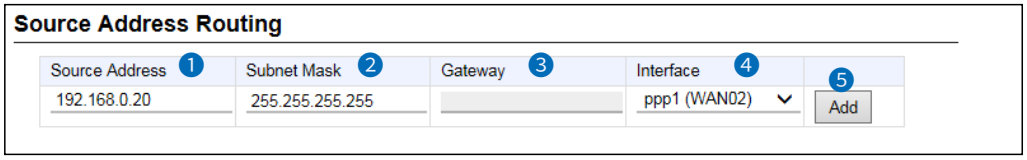

❶ Source Address ..... Set the network address of the source terminal.

❷ Subnet Mask ..... Set the subnet mask of the source network address.

❸ Gateway ..... (Only when the Interface (❹) is set to “Set the gateway”)
Set the route’s gateway address.

❹ Interface ..... The routing target interface from:
- Set the gateway
- ppp0 (WAN01) ~ ppp7 (WAN08)
- vti0 ~ vti31

❺ <Add> ..... Click to add the entry.
The entry that is registered in the [List of Source Address Routing Entries] is displayed.

■ List of Source Address Routing Entries

Displays the entered packet source routing settings.



❶ <Edit> ..... Click to edit the entry.

❷ <Delete> ..... Click to delete the entry.
ⓘ You cannot restore after clicking <Delete>.

ROUTER SETTINGS

Section 4

WAN screen 4-2
- ■ Connection Status 4-2
- ■ Connection Type 4-6
- ■ Connection Settings 4-7
- ■ List of Connection Settings 4-12

NAT screen 4-13
- ■ NAT 4-13
- ■ DMZ Host 4-13
- ■ Port Forwarding 4-14
- ■ List of Port Forwarding Entries 4-15

IP Filter screen 4-16
- ■ General Settings 4-16
- ■ IP Filter 4-17
- ■ List of IP Filter Entries 4-22

Simple DNS screen 4-23
- ■ Simple DNS Server Settings 4-23
- ■ List of Simple DNS Server Settings 4-23

VPN screen 4-24
- ■ IPsec Settings 4-24
- ■ IPsec Tunnel Settings 4-25
- ■ List of IPsec Tunnel Settings 4-27

WAN screen

Router Settings > WAN

■ Connection Status

(When “Connection Type” is set to “LAN port”)
The WAN connection status is displayed.

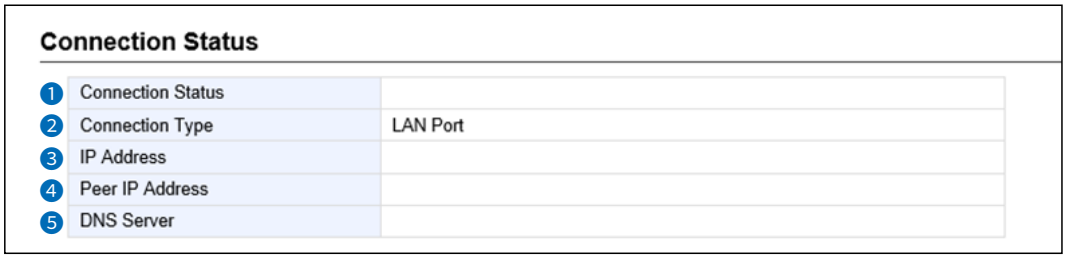

❶ **Connection Status**..... Nothing is displayed.

❷ **Connection Type** ..... The WAN connection type is displayed.

❸ **IP Address** ..... Nothing is displayed.

❹ **Peer IP Address** ..... Nothing is displayed.

❺ **DNS Server** ..... Nothing is displayed.

WAN screen

Router Settings > WAN

■ Connection Status

(When “Connection Type” is set to “DHCP Client”)
The WAN connection status is displayed.

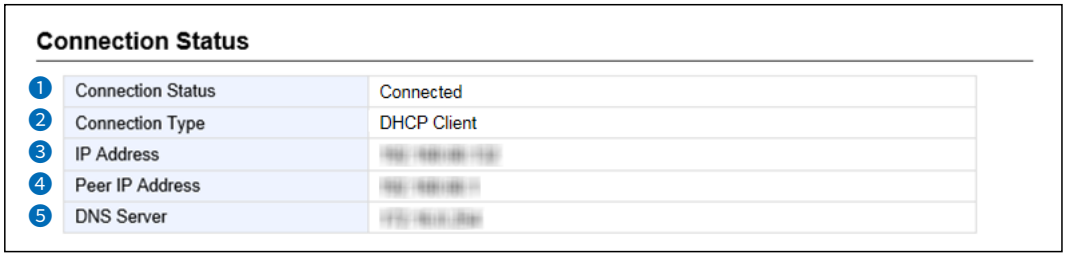

1 Connection Status..... The connection status to the Internet line is displayed as “Unplugged,” “Connecting,” or “Connected.”

2 Connection Type ..... The WAN connection type is displayed.

3 IP Address ..... The RoIP Gateway’s IP address is displayed.

4 Peer IP Address ..... The default Gateway IP address specified by your service provider is displayed.

5 DNS Server ..... The DNS server’s IP address is displayed.

WAN screen

Router Settings > WAN

■ Connection Status

(When “Connection Type” is set to “Static IP”)
The WAN connection status is displayed.

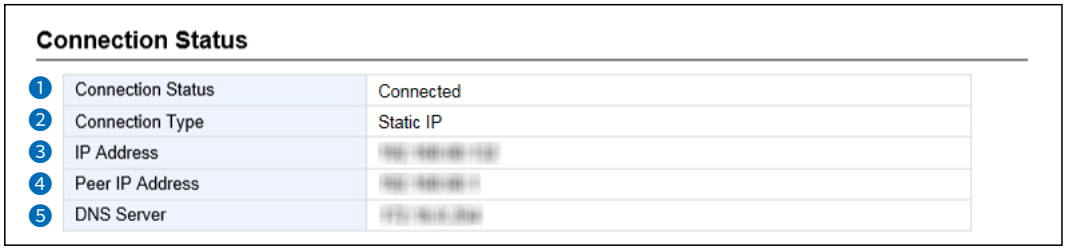

❶ Connection Status..... The connection status to the Internet line is displayed as “Unplugged,” or “Connected.”

❷ Connection Type ..... The WAN connection type is displayed.

❸ IP Address ..... The RoIP Gateway’s IP address is displayed.

❹ Peer IP Address ..... The default Gateway IP address specified by your service provider is displayed.

❺ DNS Server ..... The DNS server’s IP address is displayed.

WAN screen

Router Settings > WAN

■ Connection Status

(When “Connection Type” is set to “PPPoE”)
The WAN connection status is displayed.
ⓘ Up to 2 PPPoE sessions can be connected from the registered PPPoE destination.
ⓘ The first session is set to the default gateway.
ⓘ To use a second session, set the Static Routing and the Policy Routing.

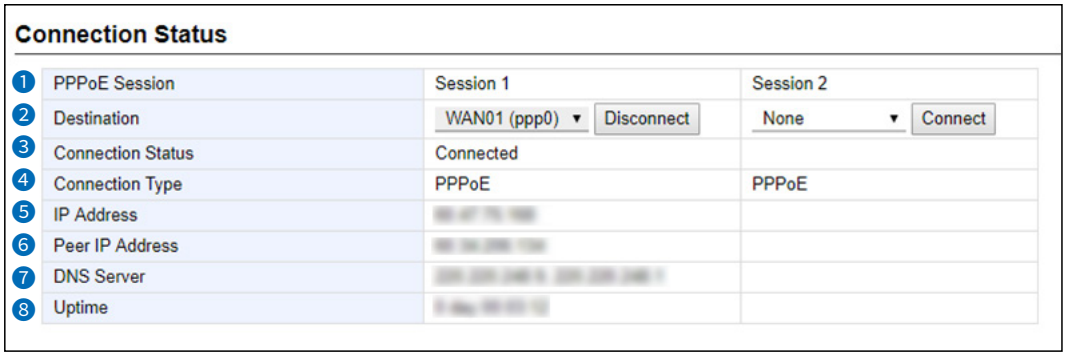

❶PPPoE Session ..... The first session and the second session are displayed respectively.

❷Destination ..... Select the destination from the WAN connection set in the [Connection Settings] setting (Router Settings > WAN > Connection Settings).
ⓘ You cannot select while connecting the line.
<Connect>/<Disconnect>
Click to manually connect or disconnect the selected WAN.
ⓘ <Disconnect> is displayed when the line is connected.
ⓘ If “Connecting” is not displayed in [Connection Status] when the line is connected, check the cable connection and network configuration.

❸Connection Status..... The connection status to the Internet line is displayed as “Unplugged,” “Disconnect,” “Connecting,” or “Connected.”

❹Connection Type ..... The WAN connection type is displayed.

❺IP Address ..... The RoIP Gateway’s IP address is displayed.

❻Peer IP Address ..... The default Gateway IP address specified by your service provider is displayed.

❼DNS Server ..... The DNS server’s IP address is displayed.

❽Uptime ..... The elapsed time the RoIP Gateway has been connected to the network is displayed.

WAN screen

Router Settings > WAN

■ Connection Type

WAN/LAN port settings.

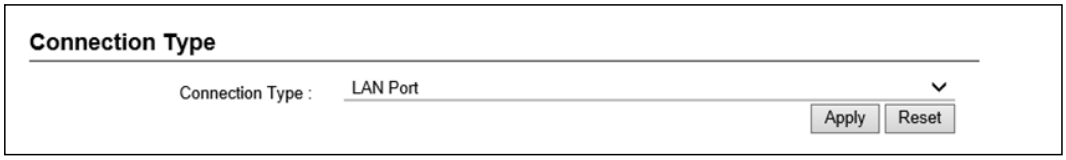

Connection Type …… Select the WAN connection type as specified by your service provider. (Default: LAN Port)

- **LAN Port:** Switching the [LAN] port to connect to other devices.
- **DHCP Client:** The WAN IP address is automatically obtained by a DHCP server.
- **Static IP:** The WAN IP address is specified by your service provider.
- **PPPoE:** The WAN IP address is specified by your service provider using the PPPoE method.

WAN screen

Router Settings > WAN

■ Connection Settings

(When “Connection Type” is set to “DHCP Client”)
Set the WAN.

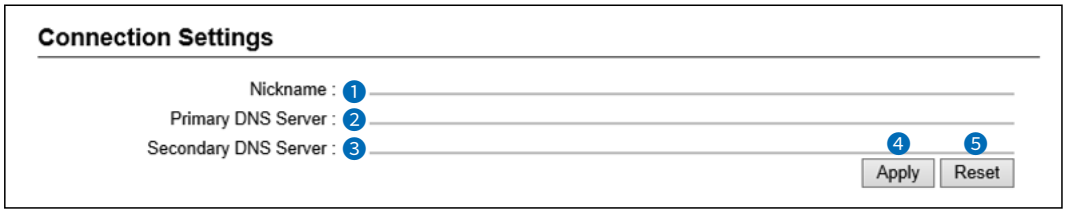

❶ **Nickname** ..... Enter your service provider’s name of up to 31 characters.

❷ **Primary DNS Server** ..... Enter the DNS server address specified by your service provider. If you have two DNS server addresses, enter the primary address.

❸ **Secondary DNS Server** ... If you have two DNS server addresses, enter the secondary DNS server address.

❹ **<Apply>** ..... Click to apply the entries.

❺ **<Reset>** ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

WAN screen

Router Settings > WAN

■ Connection Settings

(When “Connection Type” is set to “Static IP”)
Set the WAN.

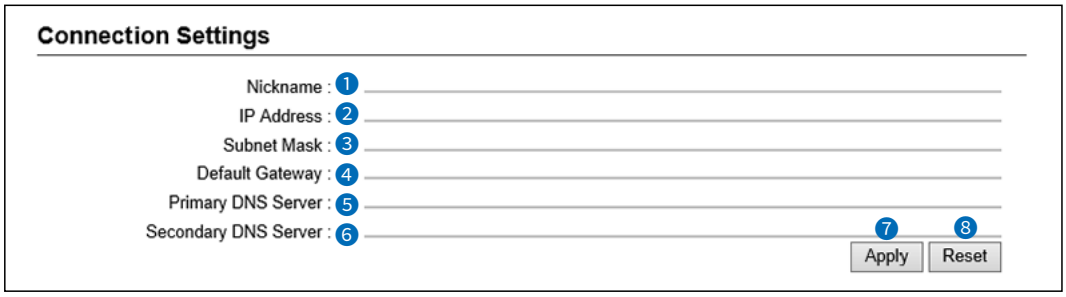

❶ **Nickname**	Enter your service provider’s name of up to 31 characters.
❷ **IP Address**	Enter the WAN IP address.
❸ **Subnet Mask**	Enter the WAN Subnet Mask.
❹ **Default Gateway**	Enter the WAN Default Gateway.
❺ **Primary DNS Server**	Enter the DNS server address specified by your service provider. If you have two DNS server addresses, enter the primary address.
❻ **Secondary DNS Server** ...	If you have two DNS server addresses, enter the secondary DNS server address.
❼ **<Apply>**	Click to apply the entries.
❽ **<Reset>**	Click to reset the settings. ⓘ You cannot reset after clicking <Apply>.

WAN screen

Router Settings > WAN

■ Connection Settings

(When “Connection Type” is set to “PPPoE”)
Set the WAN.

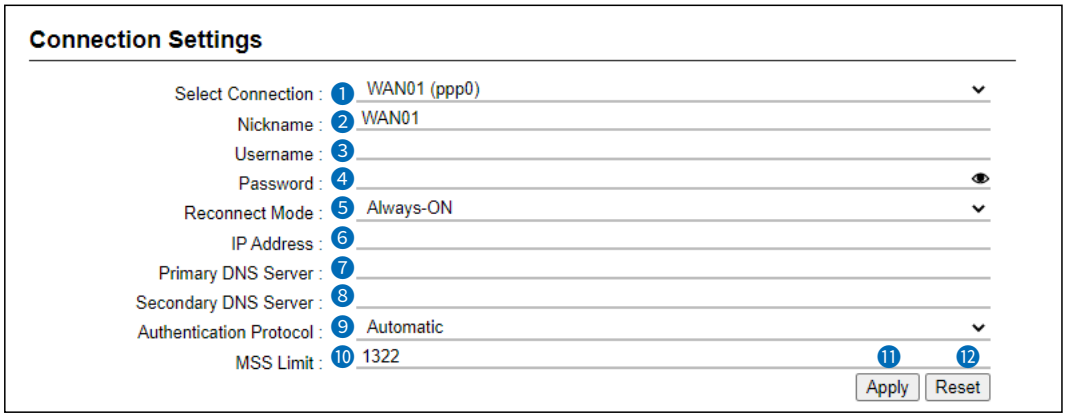

1 Select Connection ..... Select the WAN connection. (Up to 8 settings can be set.) (Default: WAN01(ppp0))

2 Nickname ..... Enter or edit your service provider’s name of up to 31 characters.
ⓘ The nickname set in [Select Connection] is displayed.

3 Username ..... Enter the login username or the account name.

4 Password ..... Enter a login password.
The entered characters are displayed as * (asterisk) or ● (black circle.)
ⓘ You can check the entered characters by clicking the eye icon to the right.

5 Reconnect Mode ..... Select the PPPoE connection method. (Default: Always-ON)

- **Manual:** The PPPoE line can be manually connected, by clicking <Connect>/<Disconnect>

ⓘ The network is disconnected, when the RoIP Gateway is booted.

- **Always-ON:** The PPPoE line is always connected to the destination set in the [Select Connection].

ⓘ The network is already connected when the RoIP Gateway is booted.
ⓘ You can manually connect or disconnect by clicking <Connect> or <Disconnect> in the “Connection Status” setting (Router Settings > WAN > Connection Status).

WAN screen

Router Settings > WAN

■ Connection Settings

(When “Connection Type” is set to “PPPoE”)

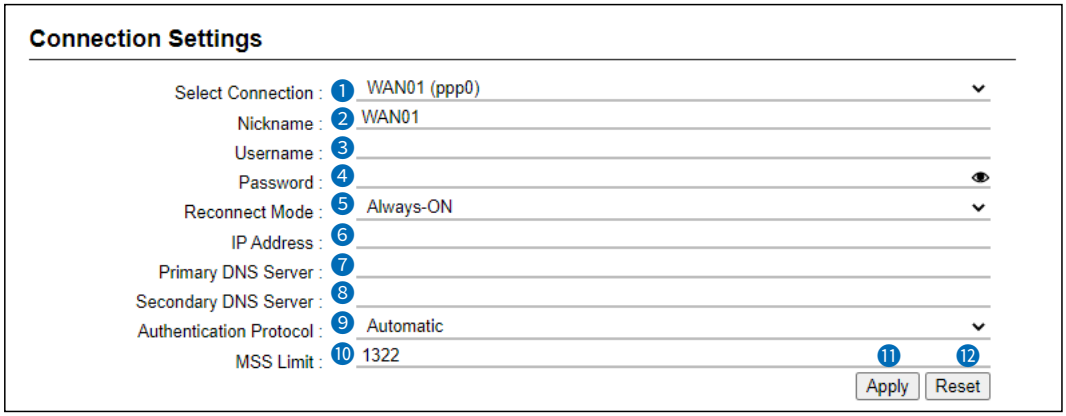

6 IP Address ..... Enter the WAN IP address only if it is specified by your service provider.

7 Primary DNS Server ..... Enter the DNS server address specified by your service provider. If you have two DNS server addresses, enter the primary address.

8 Secondary DNS Server ... If you have two DNS server addresses, enter the secondary DNS server address.

9 Authentication Protocol ... Enter the authentication protocol specified by your service provider. Select “Automatic” if not specified. (Default: Automatic)

- **Automatic:** Change PAP/CHAP automatically according to the destination’s request.
- **PAP:** Use a password for the authentication. Note that the password is not encrypted.
- **CHAP:** The authentication information is encrypted. It is more secure than PAP.

WAN screen

Router Settings > WAN

■ Connection Settings

(When “Connection Type” is set to “PPPoE”)

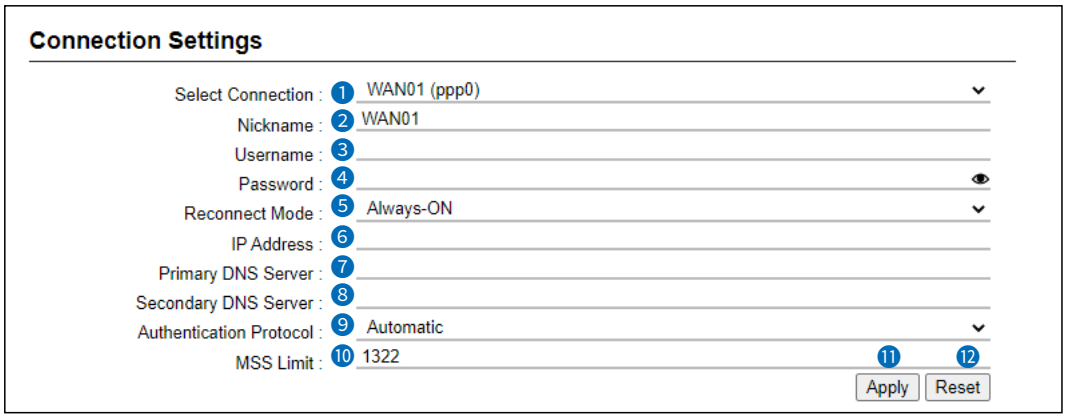

⑩ MSS Limit..... Enter the MSS Limit, if specified by your service provider.
(Default: 1322)

- Range: 536 ~ 1452 (byte)

⑪ <Apply> ..... Click to apply the entries.

⑫ <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

WAN screen

Router Settings > WAN

■ List of Connection Settings

(When “Connection Type” is set to “PPPoE”)
Lists the connection destinations registered in “Connecting Settings”. (Router Settings > WAN > Connection Settings)



<Delete> ..... Click to delete an entry.
ⓘ You cannot restore after clicking <Delete>.

NAT screen

Router Settings > NAT

■ NAT

Set the NAT.
ⓘ This function cannot be used when “LAN port” is selected in “Connection Type.”

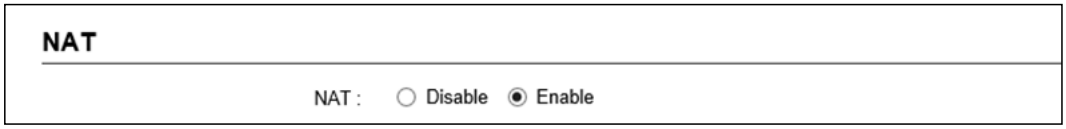

NAT..... Select “Enable” to use the NAT function. (Default: Enable)
The NAT function converts the WAN global address into a private address.

Router Settings > NAT

■ DMZ Host

Set the DMZ Host function.
ⓘ This function cannot be used when “LAN port” is selected in “Connection Type.”

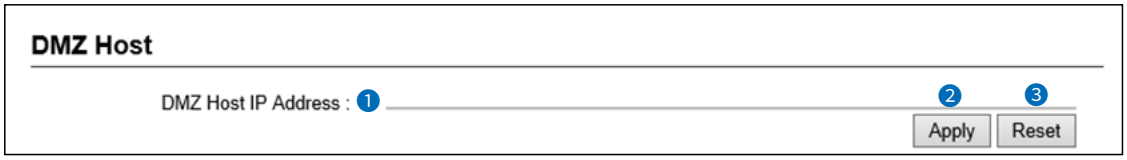

1 DMZ Host IP Address ..... Enter the DMZ Host IP address.
The DMZ Host function (DeMilitarized Zone) transfers an unknown IP frame from the WAN (Internet) to the specified IP address on the LAN. But you need to pay attention because it also decreases the security of the IP address, which is specified as the transfer destination.
ⓘ When the DMZ Host function and Port Forwarding are used at the same time, Port Forwarding is prioritized.
ⓘ Icom is not responsible for any results caused by a decline in security.

2 <Apply> ..... Click to apply the entries.

3 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

NAT screen

Router Settings > NAT

■ Port Forwarding

The Port Forwarding function forwards the packets from a masquerade IP (Router Global IP) address to a private IP address.

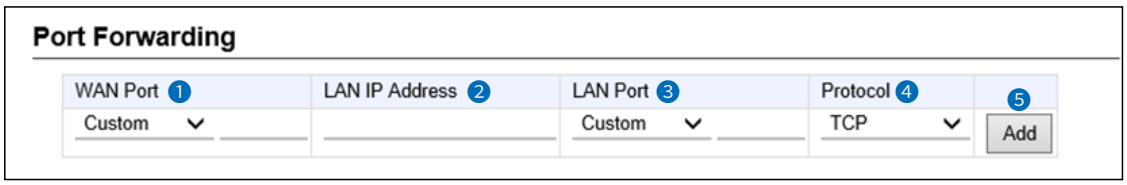

❶WAN Port ..... Select “Custom” if you select the WAN port by its number.
If you don’t select the port by number, select the port by the mnemonic (DNS, Finger, FTP, Gopher, NEWS, POP3, SMTP, Telnet, Web, or Whois).

❷LAN IP Address ..... Enter the private IP address.

❸LAN Port ..... Select “Custom” if you select the LAN port by its number.
If you don’t select the port by number, select the port by the mnemonic (DNS, Finger, FTP, Gopher, NEWS, POP3, SMTP, Telnet, Web, or Whois).

❹Protocol ..... Select the protocol from “TCP,” “UDP,” “TCP/UDP,” “GRE,” and “ESP.”

❺<Add> ..... Click to add the entry.
ⓘ Up to 32 masquerade IP addresses can be registered.

NAT screen

Router Settings > NAT

■ List of Port Forwarding Entries

Lists the Port Forwarding Entries.

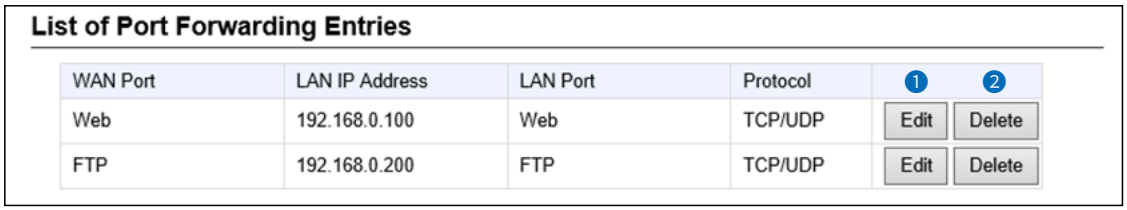

❶ **<Edit>** ..... Click to edit the entry.
ⓘ The registered entries are displayed in [Port Forwarding].

❷ **<Delete>** ..... Click to delete the entry.
ⓘ You cannot restore after clicking <Delete>.

IP Filter screen

Router Settings > IP Filter

■ General Settings

The settings to pass or block the packets that match the registered filtering settings.
ⓘ When [LAN Port] is set in Connection type, this setting cannot be changed.
ⓘ Icom is not responsible for any results caused by a decline in security due to changing the IP filter.

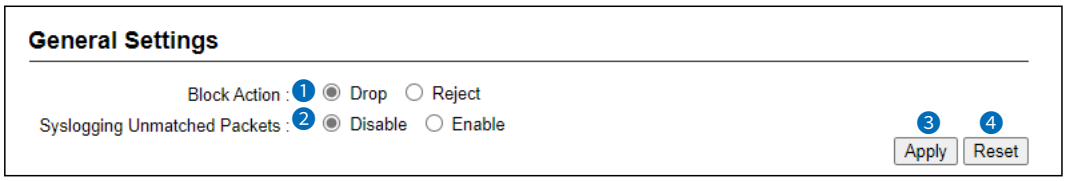

❶ Block Action ..... Select the operation when blocking the packet. (Default: Drop)

- **Drop**: Dropping the packet without any response.
- **Reject**: Sending the denied packet.

❷ Syslogging Unmatched Packets .....
Select whether or not to log the packets started from the WAN and blocked due to not matching any IP filter. (Default: Disable)
ⓘ Processing a large number of logs may decrease the processing speed.

❸ <Apply> ..... Click to apply the settings.

❹ <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

IP Filter screen

Router Settings > IP Filter

■ IP Filter

The settings to pass or block the packets that match the registered filtering settings.
ⓘ When [LAN Port] is set in Connection type, this setting cannot be changed.
ⓘ Icom is not responsible for any results caused by a decline in security due to changing the IP filter.

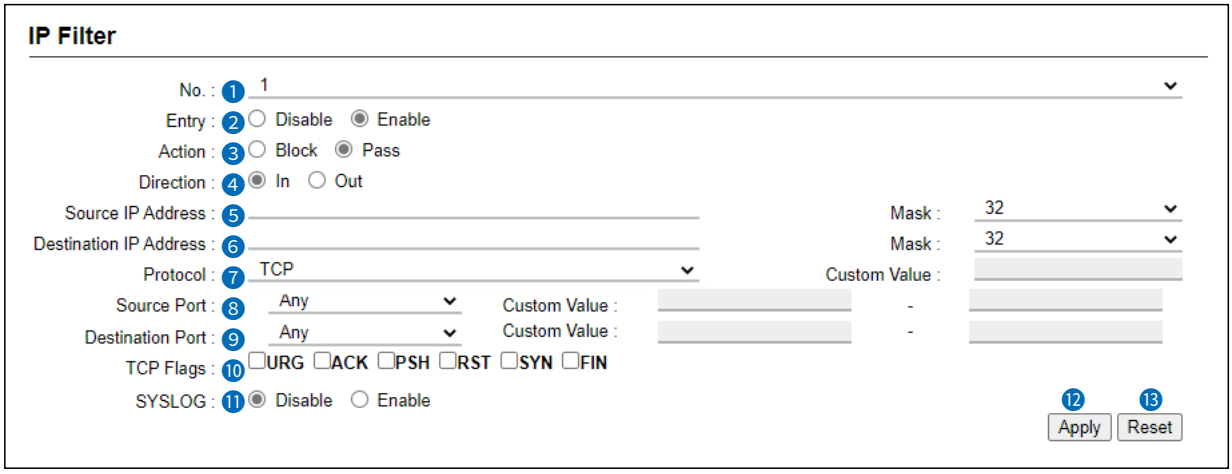

ⓘ This is an example of setting “TCP” as the protocol.

❶ No. ..... Select the filtering order.
• Range: 1 ~ 64 (Default: 1)
ⓘ The number registered in [List of IP Filter Entries] cannot be selected.
The filter function checks the packets in the selected order according to the filter setting in [list of IP Filter Entries].

❷ Entry ..... Select “Enable” to apply the filter setting. (Default: Enable)
Select “Disable” in the unused filter entry.
If the filter is registered in “Disable,” (OFF) is displayed in [No.] of [List of IP Filter Entries].
ⓘ This is an example when number “1” is disabled.

No.	Action	Protocol (TCP Flags)	Source IP Address (Source Port)	SYSLOG	
	Direction		Destination IP Address (Destination Port)		
1 (off)	Pass	TCP (Any Flag)	* (*)	Disable	Edit Delete
	In		* (*)		

❸ Action ..... Select the filtering method. (Default: Pass)

• **Block:** Blocks all packets that match the filtering settings.

• **Pass:** Passes all packets that match the filtering settings.

IP Filter screen

Router Settings > IP Filter

■ IP Filter

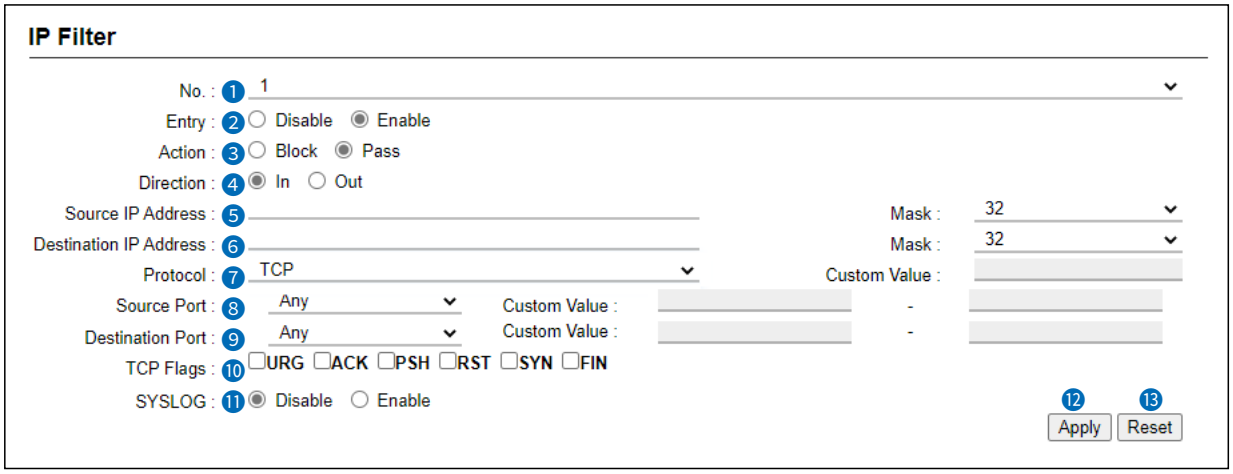

ⓘ This is an example of setting “TCP” as the protocol.

④ Direction ..... Set the filtering direction. (Default: In)

- **In**: Filters the incoming packets from the WAN interfaces.
- **Out**: Filters the outgoing packets to the WAN interfaces.

⑤ Source IP Address..... Enter the source IP address (and mask) to filter.
All the packets sent from the entered IP address are filtered (blocked or passed.)
- Mask range: 1 ~ 32

⑥ Destination IP Address ... Enter the destination IP address (and mask) to filter.
All the packets sent to the entered IP address are filtered (blocked or passed).
- Mask range: 1 ~ 32

⑦ Protocol ..... Select the transport layer protocol of the packet targeted to be filtered. (Default: Any)

- **Any:** All protocols.
- **TCP:** Only TCP.
  Enter [Source Port], [Destination Port], and [TCP Flags].
- **UDP:** Only UDP.
  Enter [Source Port] and [Destination Port].

IP Filter screen

Router Settings > IP Filter

■ IP Filter

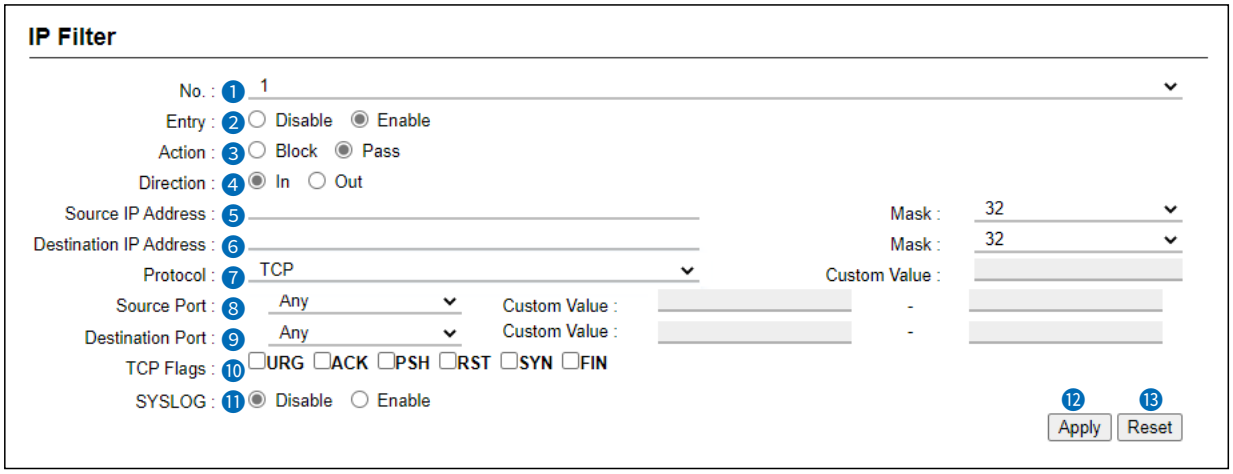

ⓘ This is an example of setting “TCP” as the protocol.

⑧ Protocol (Continued) .....

• **TCP/UDP:** TCP and UDP.
Enter [Source Port] and [Destination Port].

• **ICMP:** Only ICMP.
Enter [Type] and [Code].



[Type]
Enter the type of ICMP header to filter between 0 and 255.
ⓘ When the type is not specified, all header types are filtered.

[Code]
Enter the type of ICMP code to filter between 0 and 255.
ⓘ When the type is not specified, all code types are filtered.

• **IGMP:** Only IGMP.

• **Custom:** Specified by the protocol number.
Enter the upper IP layer protocol number into the [Custom Value].
Range: 0 ~255

IP Filter screen

Router Settings > IP Filter

■ IP Filter

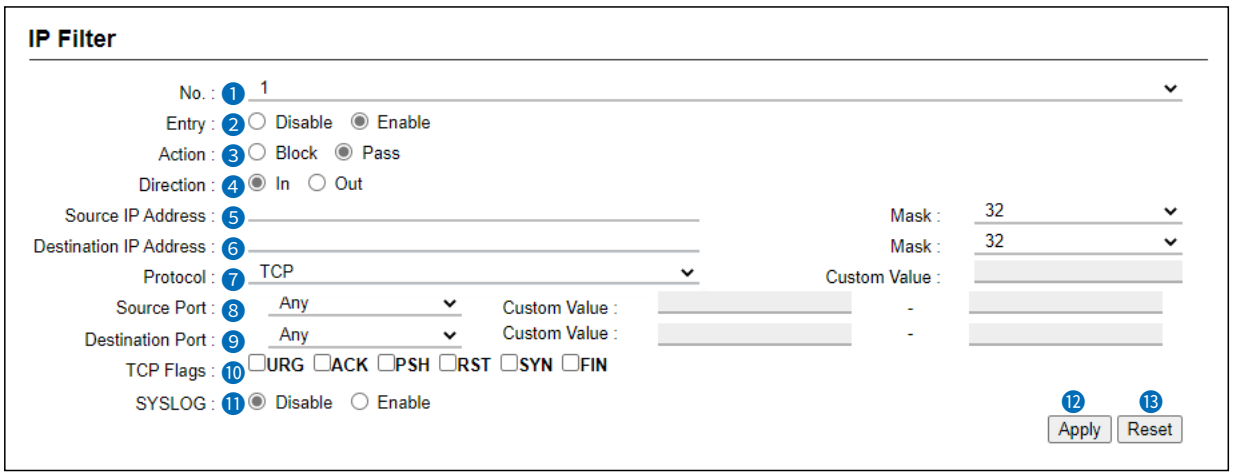

ⓘ This is an example of setting “TCP” as the protocol.

⑨ Source Port ..... Specify the source port, or enter the TCP/UDP source port number. (Default: Any)

There are 2 ways to specify the port number.

• Specifying by number

1. Select “Custom.”
2. Enter the custom port number in “Custom Value:[(Start)] - [(End)].” When you use a specific port, enter only the “[(Start)]”, or enter the same number in both the “[(Start)]” and the “[(End)].” Port number range: 1 ~ 65535

• Specifying by mnemonic

Select a source port other than “Any” or “Custom.” “DNS,” “Finger,” “FTP,” “Gopher,” “NEWS,” “POP3,” “SMTP,” “Telnet,” “Web,” “Whois” are selectable.

ⓘ When “Any” is selected, all of the port number types are filtered (blocked or passed).

⑩ Destination Port ..... Select the destination port, or enter the TCP/UDP destination port number. (Default: Any)

There are 2 ways to specify the port number.

• Specifying by number

1. Select “Custom.”
2. Enter the custom port number in “Custom Value:[(Start)] - [(End)].” When you use a specific port, enter only the “[(Start)]”, or enter the same number in both the “[(Start)]” and the “[(End)].” Port number range: 1 ~ 65535

• Specifying by mnemonic

Select a source port other than “Any” or “Custom.” “DNS,” “Finger,” “FTP,” “Gopher,” “NEWS,” “POP3,” “SMTP,” “Telnet,” “Web,” “Whois” are selectable.

ⓘ When “Any” is selected, all of the port number types are filtered (blocked or passed).

IP Filter screen

Router Settings > IP Filter

■ IP Filter

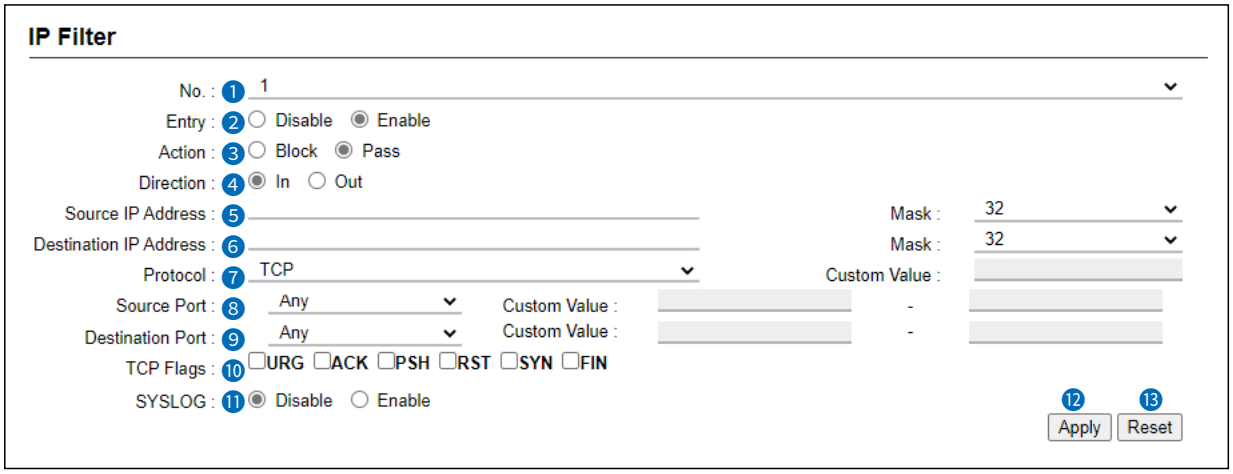

⓫ TCP Flags..... Select the TCP flags. (Default: None)
You can select the TCP flags from “URG,” “ACK,” “PSH,” “RST,” “SYN,” and “FIN.”
ⓘ The selected flag’s first character is displayed in [List of IP Filter Entries].
(Example: RST is selected)

2	Pass	TCP (R)	* (*)	Disable	Edit Delete
	In		* (*)		

ⓘ When no TCP flag is selected, the TCP flag is not set as the filtering criteria.

⓬ SYSLOG ..... Select “Enable” to output the SYSLOG. (Default: Disable)
ⓘ The log information is displayed on the SYSLOG screen.
(Information > SYSLOG)
ⓘ Processing a large number of logs may decrease the processing speed. Do not use this function except for the operation check and the test operation to ensure the call quality.

⓭ <Apply> ..... Click to apply the entries.

⓮ <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

IP Filter screen

Router Settings > IP Filter

■ List of IP Filter Entries

Lists the IP filter entries registered in [IP filter] setting.

List of IP Filter Entries

No.	Action Direction	Protocol (TCP Flags)	Source IP Address (Source Port) Destination IP Address (Destination Port)	SYSLOG	❶ ❷
59	Block Out	TCP/UDP	* (135) * (*)	Disable	Edit Delete
60	Block Out	TCP/UDP	* (*) * (135)	Disable	Edit Delete
61	Block Out	TCP/UDP	* (445) * (*)	Disable	Edit Delete
62	Block Out	TCP/UDP	* (*) * (445)	Disable	Edit Delete
63	Block Out	TCP (Any Flag)	* (*) * (137-139)	Disable	Edit Delete
64	Block Out	UDP	* (137-139) * (137-139)	Disable	Edit Delete

❶ **<Edit>** ..... Click to edit the entry.
ⓘ The entry contents are loaded to the IP Filter Setting.

❷ **<Delete>** ..... Click to delete the entry.
ⓘ You cannot restore after clicking <Delete>.

About the default IP filter packets

No. 59-64: These filtering conditions prevent unauthorized remote access to Windows applications and information leak caused by file sharing.
ⓘ The * mark matches all values.

Simple DNS screen

Router Settings > Simple DNS

■ Simple DNS Server Settings

The settings to use the RoIP Gateway as a simple DNS server.

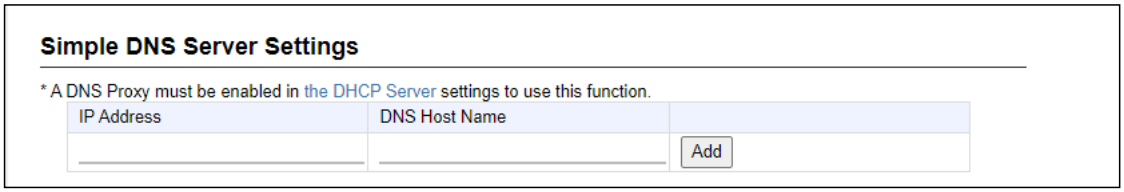

Enter the combination of the terminal host name and the IP address corresponding to the host and click <Add>.
When the combination is registered, the RoIP Gateway can respond to both DNS forward lookup and DNS reverse lookup.

ⓘ Up to 32 combinations can be registered.
ⓘ This setting is effective when using the DNS proxy response function of the RoIP Gateway.
ⓘ We recommend that you use a static DHCP server to fix the combination of the MAC address and the IP address when registering the local IP address and its host name.
ⓘ If you register “Host Name.Domain Name” as the host name, the RoIP Gateway can respond to the request, even if only the host name matches.

Router Settings > Simple DNS

■ List of Simple DNS Server Settings

Lists the simple DNS Server entries.
Click <Delete> to delete the entry.

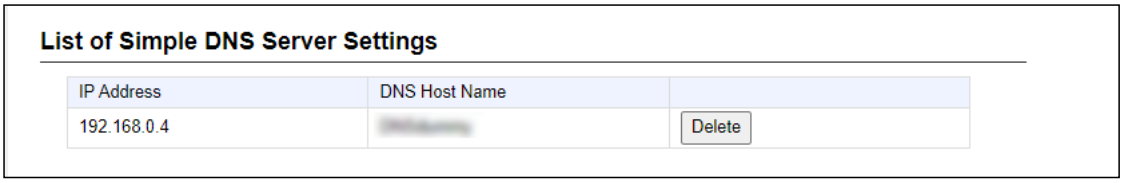

VPN screen

VPN (Virtual Private Network) enables a host computer to send and receive data over the shared or public networks like the Internet as if it were a private network. (Default: Disable)
The VPN function on the IP1100CV is compatible with the VE-PG4. (As of April 2026)

ⓘ To use the VPN function, connect the WAN line to the [WAN/LAN] port, and then configure the IPsec tunnel. (Router Settings > VPN IPsec Tunnel Settings)

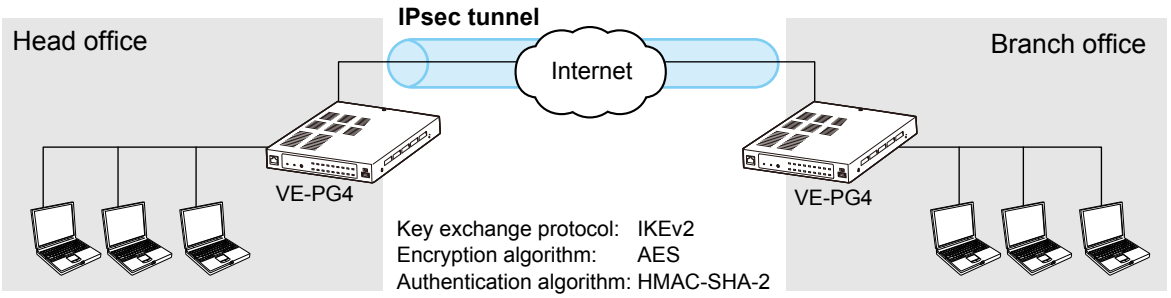

Router Settings > VPN

■ IPsec Settings

Set the virtual private network (VPN) connection using the IPsec protocol.

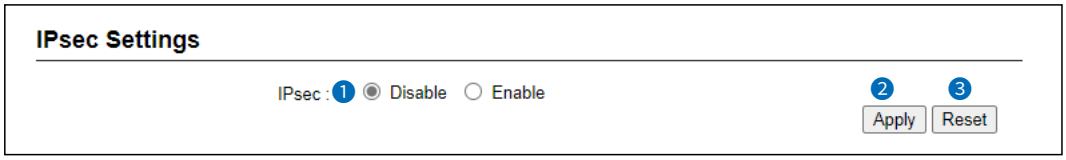

❶IPsec ..... Set the IPsec function. (Default: Disable)
When “Enable” is set, a VPN connection using the IPsec tunnel can be used.

❷<Apply> ..... Click to apply the entries.

❸<Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

To use the VPN function, connect the Controller to an upstream network though the [WAN/LAN] port, and then set [Router Settings] (Connection Type) and [Static Routing] according to your network environment.

Static Routing Settings example:

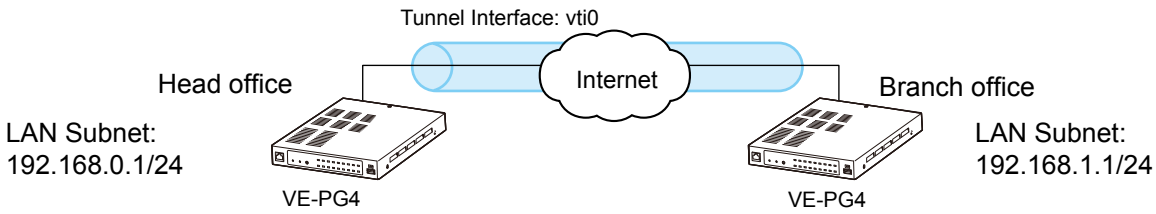

Head office Static routing settings
Remote Address: 192.168.1.0
Subnet Mask: 255.255.255.0
Tunnel Interface: vti0

Branch office Static routing settings
Remote Address: 192.168.0.0
Subnet Mask: 255.255.255.0
Tunnel Interface: vti0

VPN screen

Router Settings > VPN

■ IPsec Tunnel Settings

Set the virtual private network (VPN) connection using the IPsec tunnel.

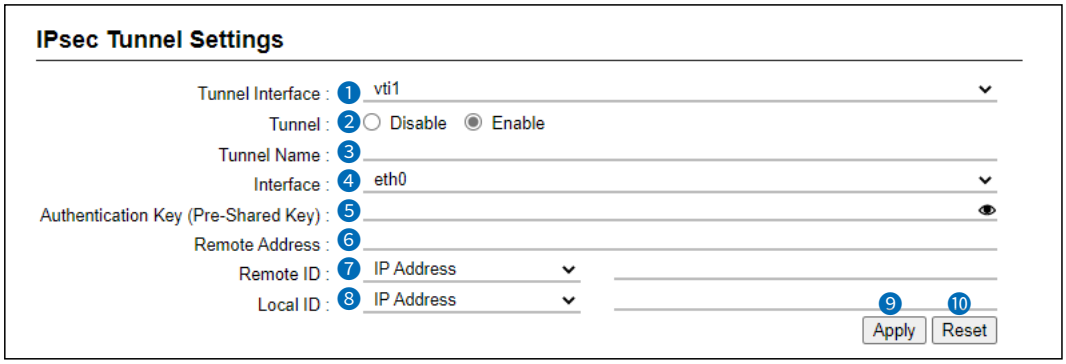

❶ Tunnel Interface ..... Specifying the interface to register the IPsec tunnel.
Range: vti0 ~ vti31

❷ Tunnel ..... Select “Enable” to use the IPsec tunnel to register. (Default: Enable)
Select “Disable” when it is registered but not used.

❸ Tunnel Name ..... Enter the name to identify the IPsec tunnel of up to 31 characters.

❹ Interface ..... Select the interface to connect with Remote Address. (Default: eth0)

- **eth0**
  Select this interface when “Static IP” or “DHCP client” is set in the “Connection Type” setting (Router Settings > WAN > Connection Type).

- **ppp0(WAN01) ~ ppp7(WAN08)**
  Select this interface when “PPPoE (WAN01 ~ WAN08)” is set in the “Connection Type” setting (Router Settings > WAN > Connection Type).

ⓘ “WAN01 ~ WAN08” are the nicknames.

❺ Authentication Key (Pre-Shared Key) ..... To authenticate the VPN Remote peer, enter the same character strings as the connected device of up to 128 alphanumeric characters.

❻ Remote Address ..... Enter the IP address or the host name of the VPN connection destination.
ⓘ If this item is not set, the Controller only works as a responder that waits for a connection from a destination.
ⓘ If the WAN IP addresses assigned to both devices are dynamic, one of them must be registered with the dynamic DNS service to obtain a host name.

VPN screen

Router Settings > VPN

■ IPsec Tunnel Settings

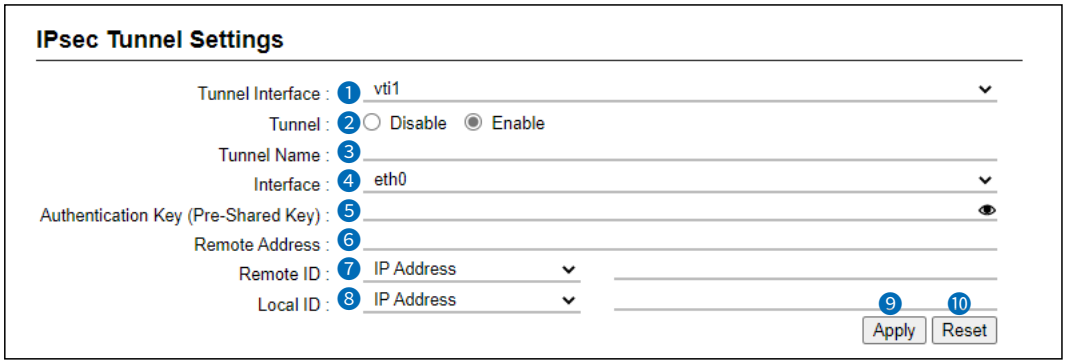

7 Remote ID ..... Set the ID to identify the connected device.
Select the IP type from "IP Address," "KEYID," "FQDN," or "USER-FQDN."
(Default: IP Address)

- **IP Address:** IP address format
- **KEYID:** Up to 256 alphanumeric characters
- **FQDN:** Domain name up to 253 characters
- **USER-FQDN:** Mail address format up to 254 characters
  Example: user@xxxx.yyyy.zzzz
  1. 2.

  1. Up to 64 characters
  2. Up to 63 characters for each part

8 Local ID ..... Set the ID to identify the local device.
Select the IP type from "IP Address," "KEYID," "FQDN," or "USER-FQDN."
(Default: IP Address)

- **IP Address:** IP address format
- **KEYID:** Up to 256 alphanumeric characters
- **FQDN:** Domain name up to 253 characters
- **USER-FQDN:** Mail address format up to 254 characters
  Example: user@xxxx.yyyy.zzzz
  1. 2.

  1. Up to 64 characters
  2. Up to 63 characters for each part

9 <Apply> ..... Click to apply the entries.

10 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

VPN screen

Router Settings > VPN

■ List of IPsec Tunnel Settings

Lists the connections settings.

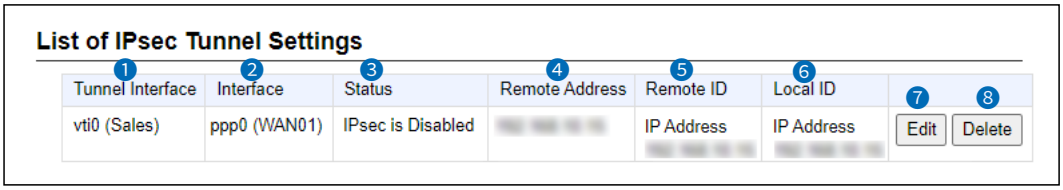

❶ Tunnel Interface ..... The interface name (tunnel name) is displayed.

❷ Interface ..... The interface name of the tunnel source is displayed.

❸ Status ..... The IPsec tunnel status is displayed.

- **Connected:** Connected.
- **Waiting:** Connection ready.
- **Connecting:** Connection in progress.
- **Disable:** IPsec is enable but Tunnel Setting is disable.
- **IPsec is Disabled:** The RoIP Gateway's IPsec function is disabled.

❹ Remote Address ..... The IP address set as the connection destination or the host name is displayed.
"-" is displayed when this item is not set in a Responder.
The destination IP address is displayed while connecting.
ⓘ When a VPN connection is made while the Responder function is ON, the Remote Address is displayed in parentheses, as in (172.16.***.***).

❺ Remote ID ..... The peer ID is displayed.

❻ Local ID ..... The local ID is displayed.

❼ <Edit> ..... Click to edit the entry.

❽ <Delete> ..... Click to delete the entry.
ⓘ You cannot restore after clicking <Delete>.

VPN screen

Router Settings > VPN

The IPsec Tunnel setting example (1)

In case that [Connection Type] is “PPPoE” and connects between Static IP addresses:

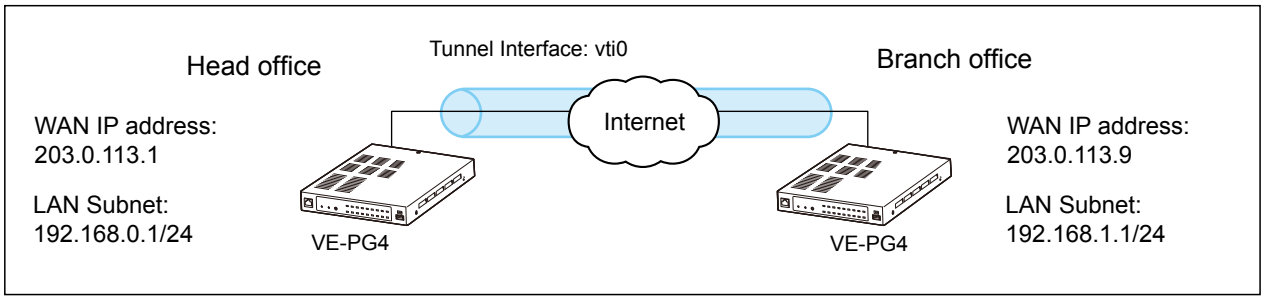

ⓘ The Static routing to the IPsec Tunnel is also required. (P.3-9, P.4-25)

Settings at the Head office

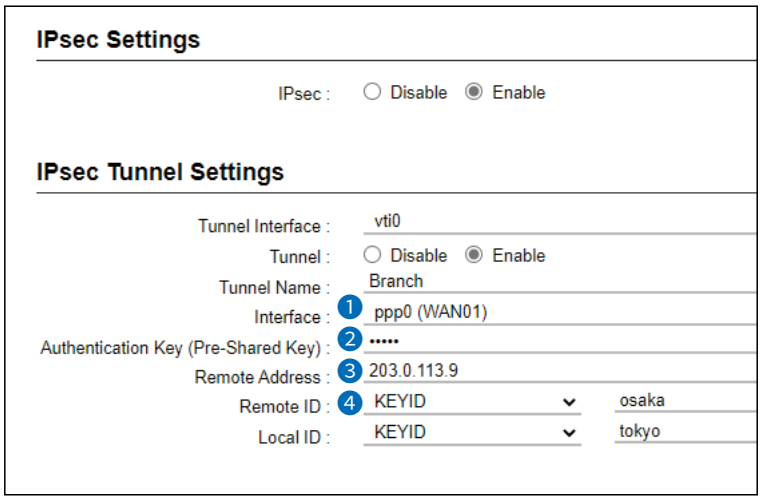

1. Select the PPPoE setting.
2. Enter the same key to both the Head office and the Branch office.
3. Enter the WAN IP address of the branch office.
4. Enter the Local ID of the Branch.

Settings at the Branch office

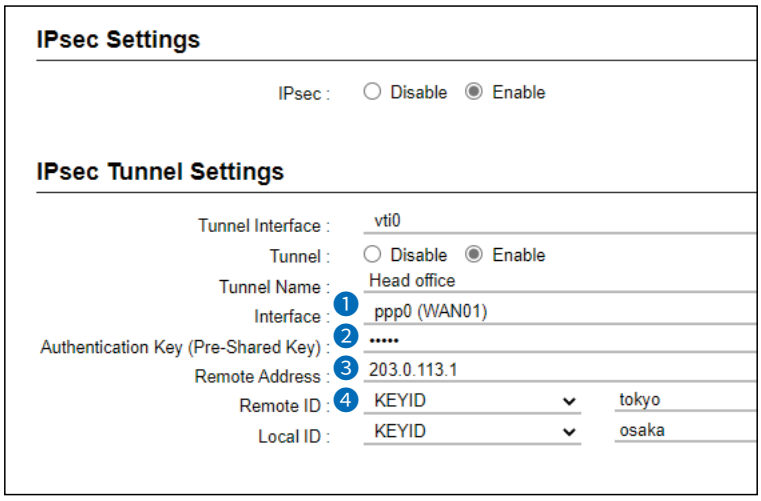

1. Select the PPPoE setting.
2. Enter the same key to both the Head office and the Branch office.
3. Enter the WAN IP address of the Head office.
4. Enter the Local ID of the Head office.

VPN screen

Router Settings > VPN

The IPsec Tunnel setting example (2)

In case that [Connection Type] is “PPPoE” and connects between Static IP address and Dynamic IP address:

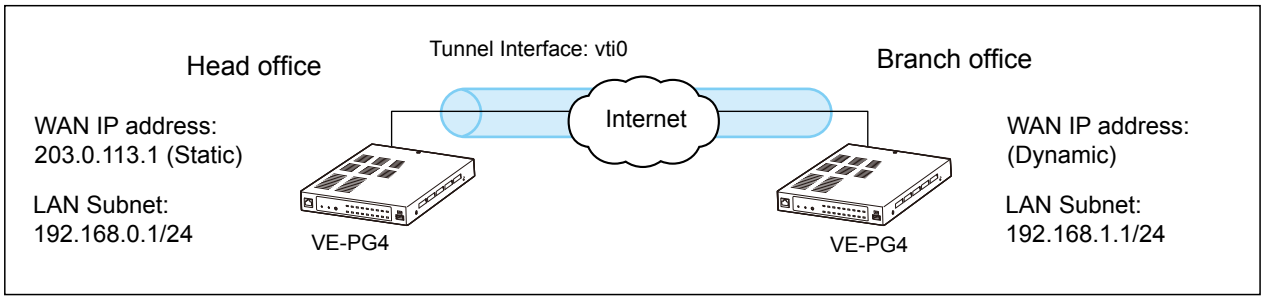

ⓘ The Static routing to the IPsec Tunnel is also required. (P.3-9, P.4-25)

Settings at the Head office

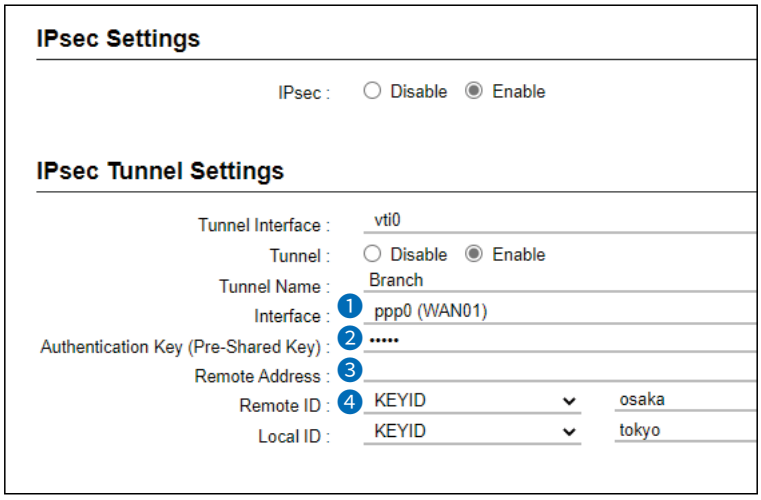

1. Select the PPPoE setting.
2. Enter the same key to both the Head office and the Branch office.
3. Blank
4. Enter the Local ID of the Branch office.

Settings at the Branch office

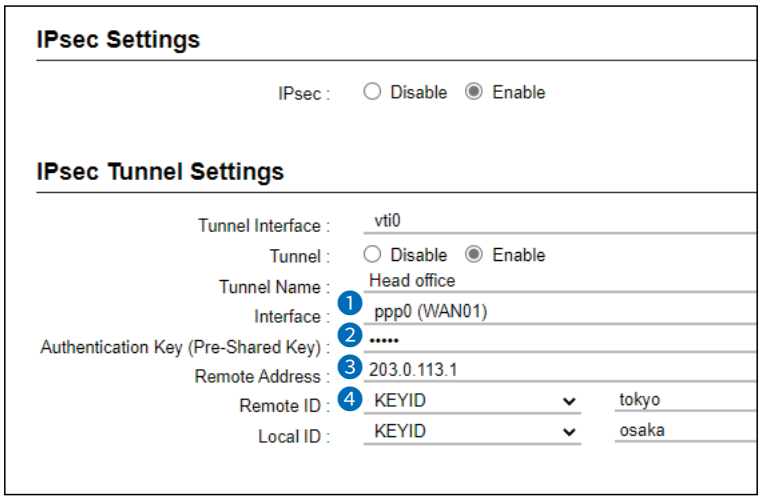

1. Select the PPPoE setting.
2. Enter the same key to both the Head office and the Branch office.
3. Enter the WAN IP address of the Head office.
4. Enter the Local ID of the Head office.

BRIDGE CONNECTION SETTINGS

Section 5

Bridge Connection screen 5-2
- ■ Bridge Connection 5-2
- ■ Bridge Connection Entry List (For Combination) 5-11
- ■ Bridge Connection Entry List (For Custom Bridge Connection) 5-12
- ■ AMBE+2 Vocoder Assignment 5-13

SelCall in Bridge Connection screen..... 5-15
- ■ Save or Write the Rule Settings for SelCall in Bridge Connection 5-15
- ■ Rule Settings for SelCall in Bridge Connection 5-16
- ■ List of Rule Settings for SelCall in Bridge Connection 5-17

Bridge Connection screen

Bridge Connection Settings > Bridge Connection

■ Bridge Connection

Sets the transceiver port bridge connection combination.

ⓘ The transceiver port assigned as a bridge connection source or a destination is no longer usable as a call destination.

ⓘ The EXT 1 and MIC ports are not usable at the same time. The EXT 1 port is disabled while a microphone is connected to the MIC port on the front panel.

Unicast mode

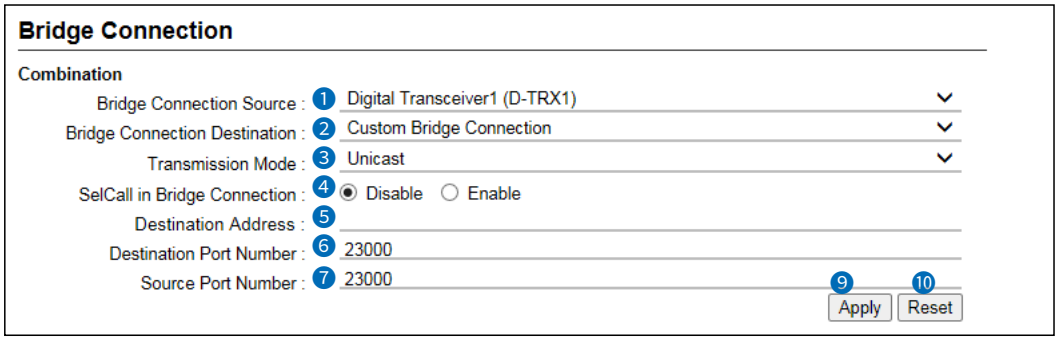

ⓘ The above example shows when the Bridge Connection Destination (❷) is set to “Custom Bridge Connection.”

Multicast mode

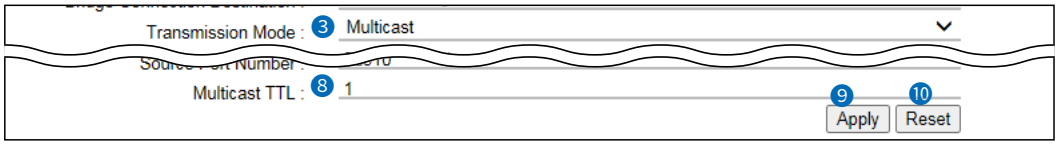

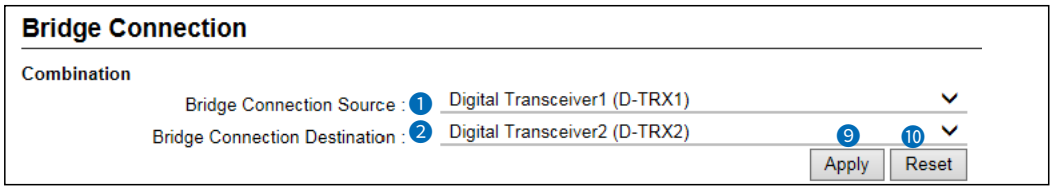

ⓘ The above example shows when the Bridge Connection Destination (❷) is set to “Digital Transceiver 2 (D-TRX2).”

❶ Bridge Connection Source — Select the port for the bridge connection.

❷ Bridge connection Destination — Select the destination port for the bridge connection.
ⓘ Only the ports that can be connected to the source port (❶) are listed in this setting.

NOTE: When you set a combination of a Digital Transceiver and an analog transceiver (EXT(I/O) Port,) enter [AMBE+2 Vocoder Assignment] settings below on the same screen.

Bridge Connection screen

Bridge Connection Settings > Bridge Connection

■ Bridge Connection

Unicast mode

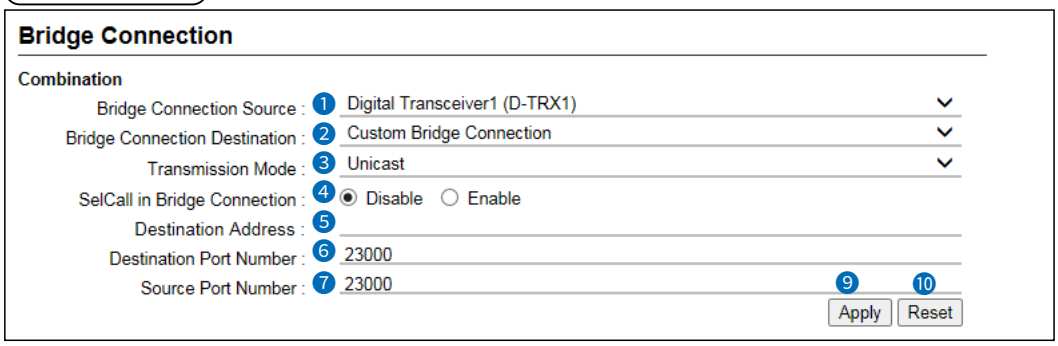

ⓘ The above example shows when the Bridge Connection Destination (❷) is set to “Custom Bridge Connection.”

Multicast mode

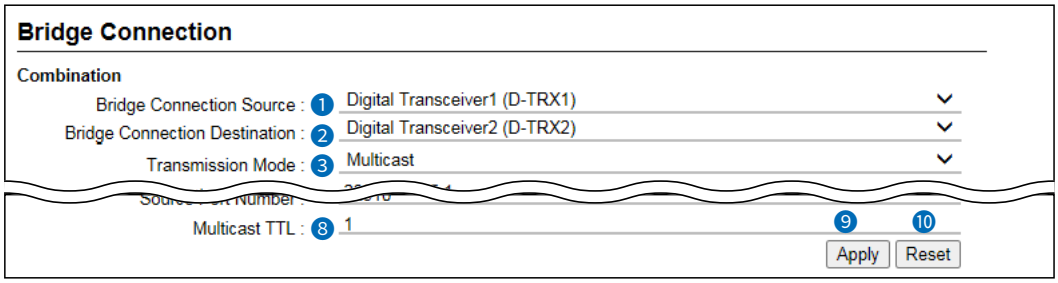

ⓘ The above example shows when the Bridge Connection Destination (❷) is set to “Digital Transceiver 2 (D-TRX2).”

❸ Transmission Mode …… Set the transmission mode for Bridge Connection with the RoIP Gateway by either Unicast or Multicast.

❹ SelCall in Bridge Connection Set whether or not you can make an Individual call to a device that is connected to the same network as this RoIP Gateway.

(Default: Disable)

ⓘ If this setting is enabled, The RoIP Gateway connects to the destination device according to the List of Rule Settings for SelCall in Bridge Connection.
(Bridge Connection Settings > SelCall in Bridge Connection > List of Rule Settings for SelCall in Bridge Connection)

ⓘ This setting is displayed when the combination of Digital Transceiver (D-TRX1 ~ 4) and the Custom Bridge Connection are set.

Bridge Connection screen

Bridge Connection Settings > Bridge Connection

■ Bridge Connection

Unicast mode

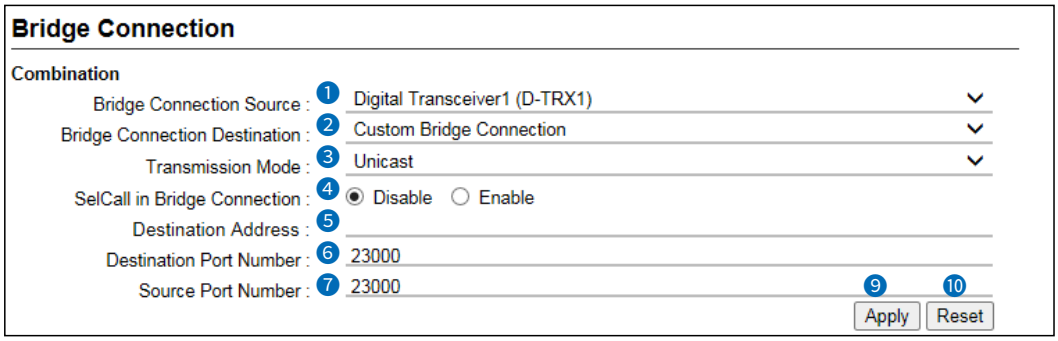

ⓘ The above example shows when the Bridge Connection Destination (❷) is set to “Custom Bridge Connection.”

Multicast mode

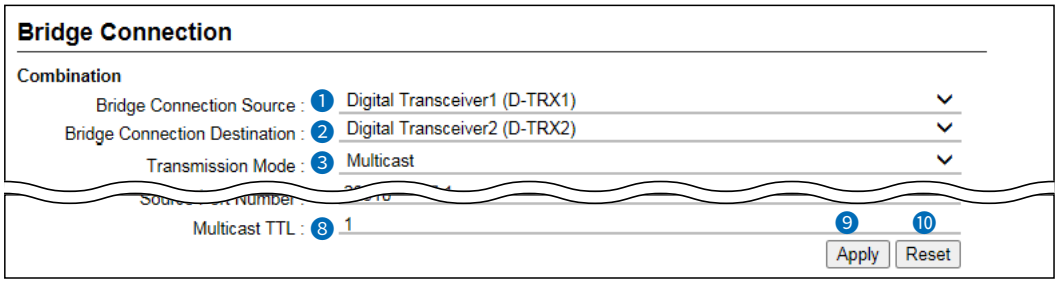

ⓘ The above example shows when the Bridge Connection Destination (❷) is set to “Digital Transceiver 2 (D-TRX2).”

❺ Destination Address .....

Set the IP address as follows.

ⓘ When “Enable” is selected in the SelCall in Bridge Connection (❹), this item is not displayed.

- **When the Transmission mode is “Unicast”:**
  Enter a Destination Address, or its domain name of up to 63 characters.

- **When the Transmission mode is “Multicast”:**
  Enter the same multicast address as the setting in the Bridge Connection Destination.
  The settable range: 224.0.0.0 ~ 239.255.255.255
  (Default: 239.255.255.1)

Bridge Connection screen

Bridge Connection Settings > Bridge Connection

■ Bridge Connection

Unicast mode

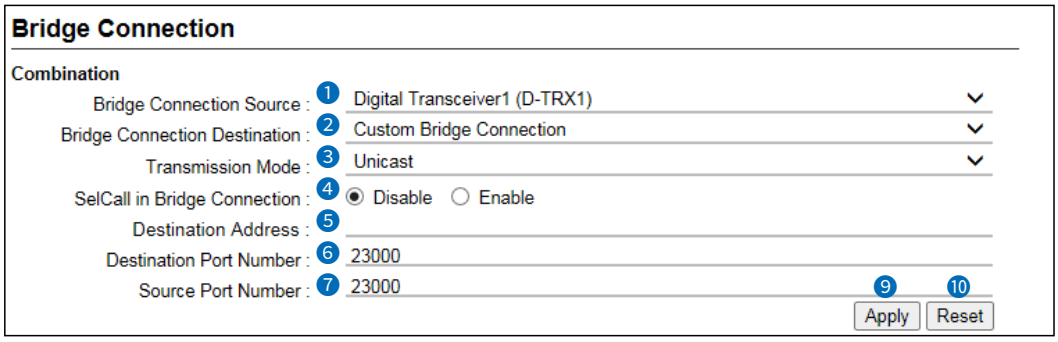

ⓘ The above example shows when the Bridge Connection Destination (2) is set to “Custom Bridge Connection.”

Multicast mode

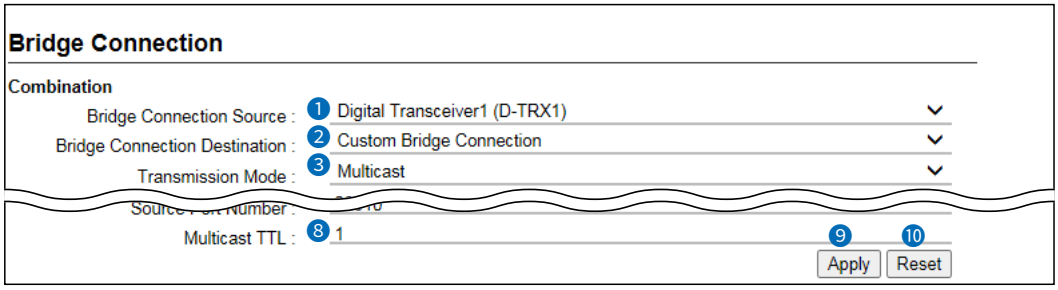

6 Destination Port Number… Set the same port number as the Source Port Number (7).

- Range: An even number from 1024 to 65534.

ⓘ Do not duplicate other connection port settings.

ⓘ When “Enable” is selected in the SelCall in Bridge Connection (4), this item is not displayed.

❍ **The Default port settings in the Unicast mode**

Options	Default	Options	Default
Digital Transceiver 1 (D-TRX1)	23000	EXT Output 4(EXT4)	23114
Digital Transceiver 2 (D-TRX2)	23002	Emergency Notification	23116
Digital Transceiver 3 (D-TRX3)	23004	Microphone (MIC)	23150
Digital Transceiver 4 (D-TRX4)	23006	RoIP Gateway1	24300
EXT Input 1 (EXT1) / EXT I/O 1 (EXT1)	23100	RoIP Gateway2	24302
EXT Output 1 (EXT1)	23102	RoIP Gateway3	24304
EXT Input 2 (EXT2) / EXT I/O 2 (EXT2)	23104	RoIP Gateway4	24306
EXT Output 2 (EXT2)	23106	RoIP Gateway5	24308
EXT Input 3 (EXT3) / EXT I/O 3 (EXT3)	23108	RoIP Gateway6	24310
EXT Output 3 (EXT3)	23110	RoIP Gateway7	24312
EXT Input 4 (EXT4) / EXT I/O 4 (EXT4)	23112	RoIP Gateway8	24314

Bridge Connection screen

Bridge Connection Settings > Bridge Connection

■ Bridge Connection

Unicast mode

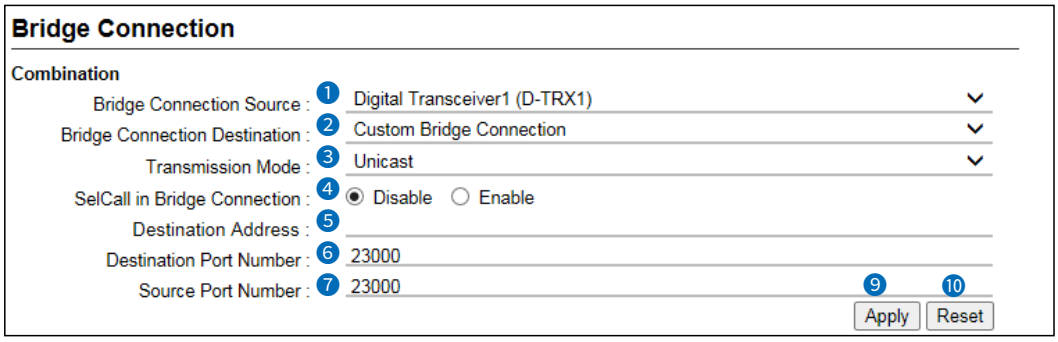

ⓘ The above example shows when the Bridge Connection Destination (2) is set to “Custom Bridge Connection.”

Multicast mode

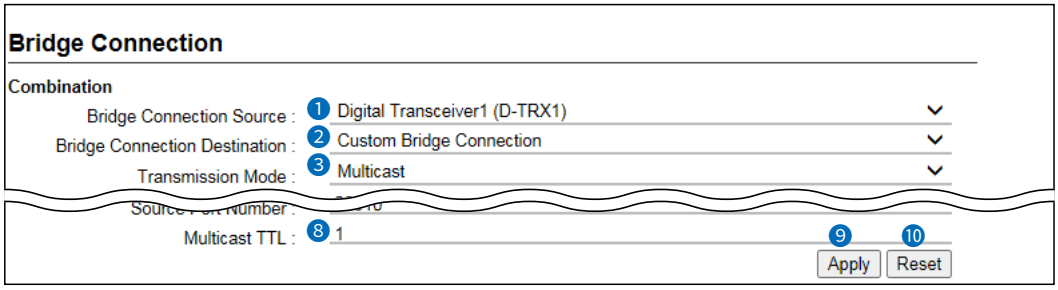

6 Destination Port Number (Continued)

❍ **The Default port settings in the Multicast mode**

Options	Default	Options	Default
Digital Transceiver 1 (D-TRX1)	22510	EXT Output 4(EXT4)	22510
Digital Transceiver 2 (D-TRX2)	22510	Emergency Notification	22520
Digital Transceiver 3 (D-TRX3)	22510	Microphone (MIC)	22510
Digital Transceiver 4 (D-TRX4)	22510	RoIP Gateway1	22530
EXT Input 1 (EXT1) / EXT I/O 1 (EXT1)	22510	RoIP Gateway2	22530
EXT Output 1 (EXT1)	22510	RoIP Gateway3	22530
EXT Input 2 (EXT2) / EXT I/O 2 (EXT2)	22510	RoIP Gateway4	22530
EXT Output 2 (EXT2)	22510	RoIP Gateway5	22530
EXT Input 3 (EXT3) / EXT I/O 3 (EXT3)	22510	RoIP Gateway6	22530
EXT Output 3 (EXT3)	22510	RoIP Gateway7	22530
EXT Input 4 (EXT4) / EXT I/O 4 (EXT4)	22510	RoIP Gateway8	22530

Bridge Connection screen

Bridge Connection Settings > Bridge Connection

■ Bridge Connection

Unicast mode

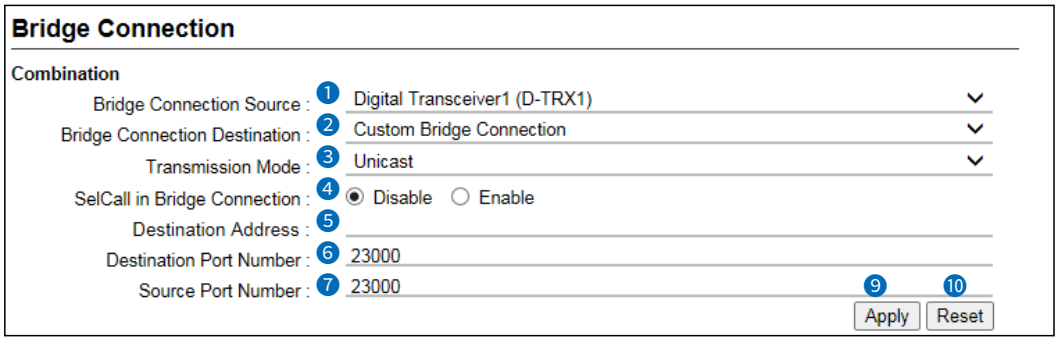

ⓘ The above example shows when the Bridge Connection Destination (❷) is set to “Custom Bridge Connection.”

Multicast mode

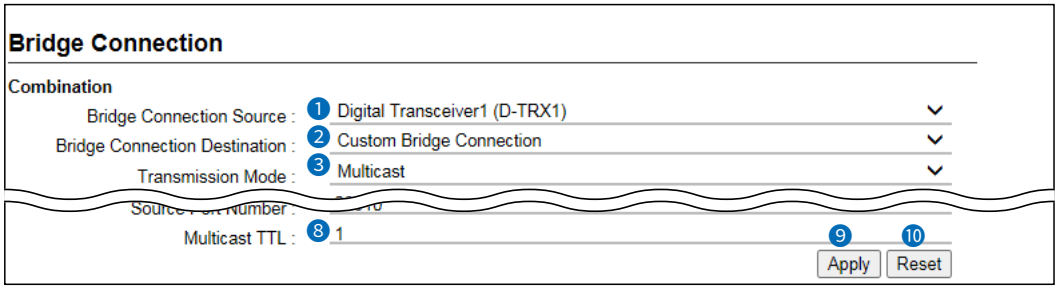

❼ Source Port Number ..... Set the port number to receive the audio signal.

- Range: An even number from 1024 to 65534.

ⓘ This setting is also used to the source port number to transmit the audio signal.

ⓘ For communication, the set port number (RTP) and the set port number +1 (RTCP) are used.

ⓘ Do not duplicate other connection port settings, when using in the Unicast mode.

ⓘ The default settings differ, depending on the EXT I/O Port Mode setting. (Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode)

❍ The Default port settings in the Unicast mode

Options	Default	Options	Default
Digital Transceiver 1 (D-TRX1)	23000	EXT Output 4(EXT4)	23114
Digital Transceiver 2 (D-TRX2)	23002	Emergency Notification	23116
Digital Transceiver 3 (D-TRX3)	23004	Microphone (MIC)	23150
Digital Transceiver 4 (D-TRX4)	23006	RoIP Gateway1	24300
EXT Input 1 (EXT1) / EXT I/O 1 (EXT1)	23100	RoIP Gateway2	24302
EXT Output 1 (EXT1)	23102	RoIP Gateway3	24304
EXT Input 2 (EXT2) / EXT I/O 2 (EXT2)	23104	RoIP Gateway4	24306
EXT Output 2 (EXT2)	23106	RoIP Gateway5	24308
EXT Input 3 (EXT3) / EXT I/O 3 (EXT3)	23108	RoIP Gateway6	24310
EXT Output 3 (EXT3)	23110	RoIP Gateway7	24312
EXT Input 4 (EXT4) / EXT I/O 4 (EXT4)	23112	RoIP Gateway8	24314

Bridge Connection screen

Bridge Connection Settings > Bridge Connection

■ Bridge Connection

Unicast mode

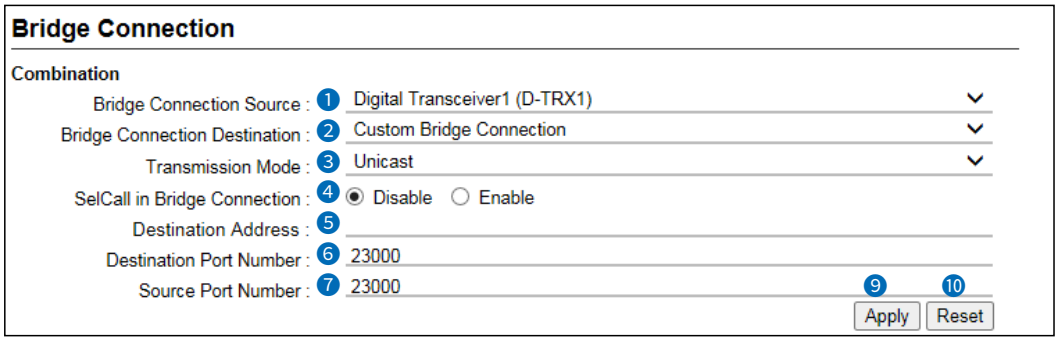

ⓘ The above example shows when the Bridge Connection Destination (2) is set to “Custom Bridge Connection.”

Multicast mode

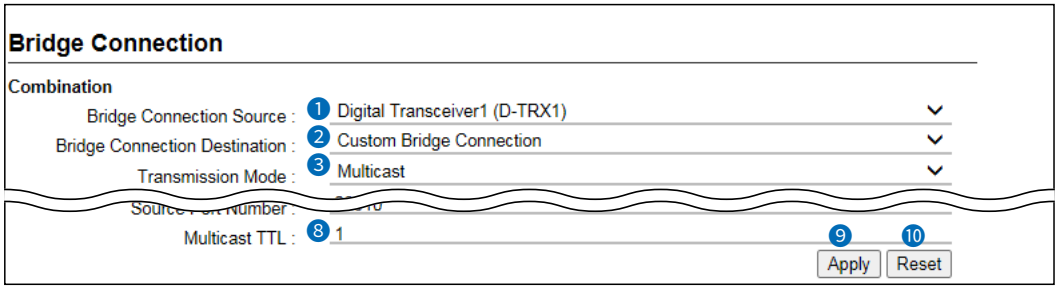

7 Source Port Number (Continued)

❍ **The Default port settings in the Multicast mode**

Options	Default	Options	Default
Digital Transceiver 1 (D-TRX1)	22510	EXT Output 4(EXT4)	22510
Digital Transceiver 2 (D-TRX2)	22510	Emergency Notification	22520
Digital Transceiver 3 (D-TRX3)	22510	Microphone (MIC)	22510
Digital Transceiver 4 (D-TRX4)	22510	RoIP Gateway1	22530
EXT Input 1 (EXT1) / EXT I/O 1 (EXT1)	22510	RoIP Gateway2	22530
EXT Output 1 (EXT1)	22510	RoIP Gateway3	22530
EXT Input 2 (EXT2) / EXT I/O 2 (EXT2)	22510	RoIP Gateway4	22530
EXT Output 2 (EXT2)	22510	RoIP Gateway5	22530
EXT Input 3 (EXT3) / EXT I/O 3 (EXT3)	22510	RoIP Gateway6	22530
EXT Output 3 (EXT3)	22510	RoIP Gateway7	22530
EXT Input 4 (EXT4) / EXT I/O 4 (EXT4)	22510	RoIP Gateway8	22530

Bridge Connection screen

Bridge Connection Settings > Bridge Connection

■ Bridge Connection

Unicast mode

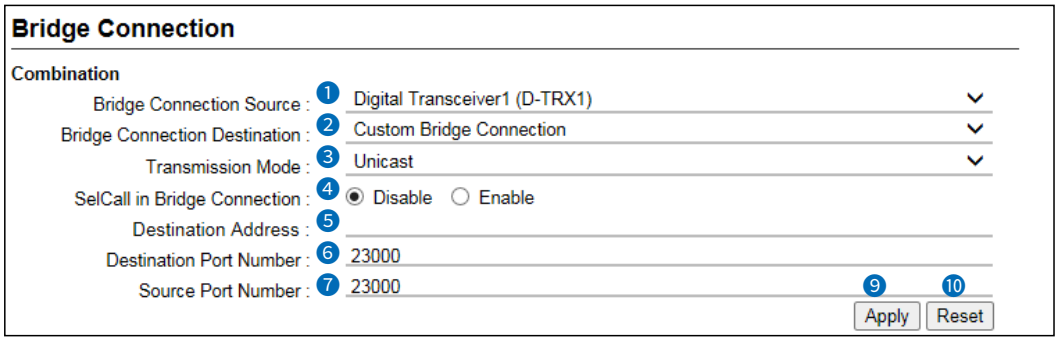

ⓘ The above example shows when the Bridge Connection Destination (❷) is set to “Custom Bridge Connection.”

Multicast mode

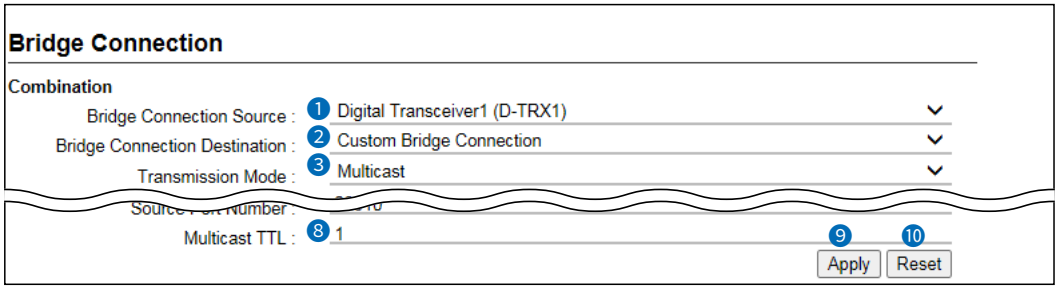

❽ Multicast TTL ..... Displayed only when the Transmission Mode (❸) is set to “Multicast.” As the expiration date of the voice packet, set the TTL (Time To Live) until the voice packet reaches the communication destination. The TTL value decreases every time it passes through a router, the voice packets transmission expires when the TTL value reaches zero. Therefore you can prevent a packet transmission loop. (Default: 1)

- Range: 1 ~255

Bridge Connection screen

Bridge Connection Settings > Bridge Connection

■ Bridge Connection

Unicast mode

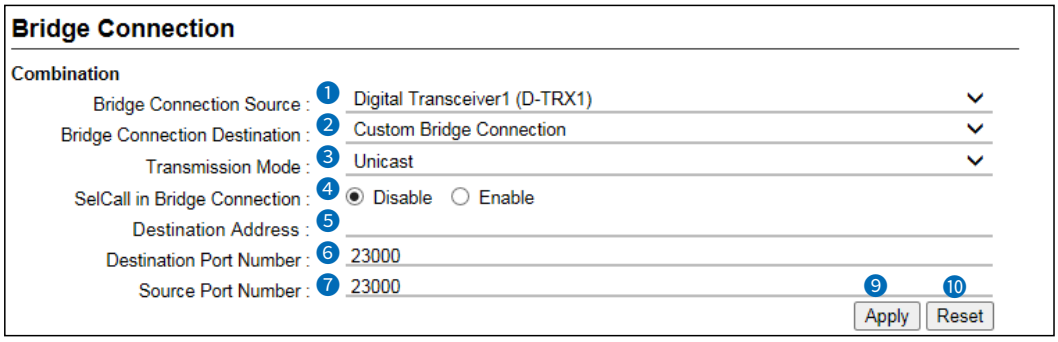

ⓘ The above example shows when the Bridge Connection Destination (❷) is set to “Custom Bridge Connection.”

Multicast mode

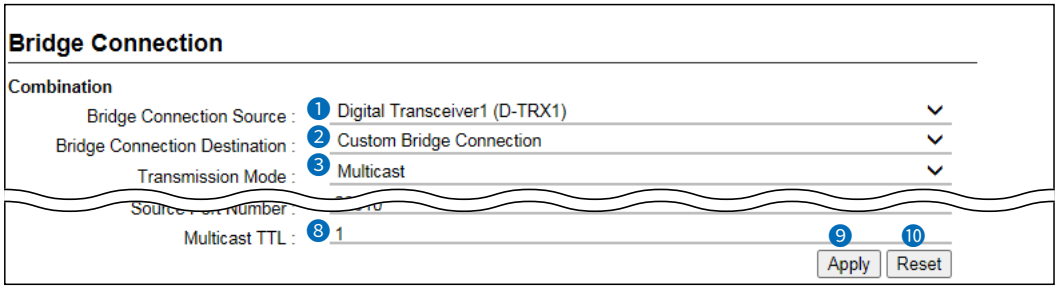

❾ **<Apply>** ..... Click to apply the entries.

ⓘ When you select other than “Custom Bridge Connection” for a combination, the connection is activated as soon as you click <Apply>. The entries are displayed on [Bridge Connection Entry List (For Combination)] screen.

ⓘ When “Custom Bridge Connection” is selected in the Bridge Connection Destination, the entries are displayed on [Bridge Connection Entry List (For Custom Bridge Connection)] screen.
Click <Activate> in the list to activate the bridge connection.

❿ **<Reset>** ..... Click to reset the settings.

ⓘ You cannot restore after clicking <Apply>.

Bridge Connection screen

Bridge Connection Settings > Bridge Connection

■ Bridge Connection Entry List (For Combination)

Lists the combination entries of the bridge connection. See the “ Bridge Connection Entry List (For Custom Bridge Connection)” below when the Bridge Connection Destination is set to “Custom Bridge Connection.”

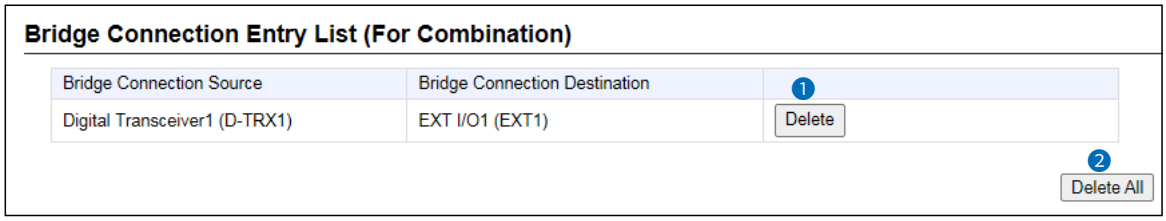

❶ **<Delete>** ..... Click to delete the entry.
ⓘ You cannot restore after clicking <Delete>.

❷ **<Delete All>** ..... Click to delete all the entries.
ⓘ You cannot restore after clicking <Delete All>.

Bridge Connection screen

Bridge Connection Settings > Bridge Connection

■ Bridge Connection Entry List (For Custom Bridge Connection)

Lists the combination entries of the bridge connection when the Bridge Connection Destination is set to “Custom Bridge Connection.”

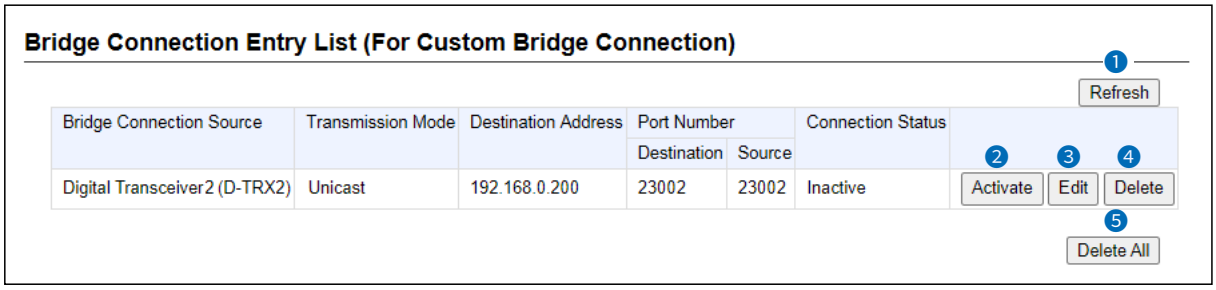

❶ **<Refresh>** ..... Click to reload the list.

❷ **<Activate>** ..... Click to connect the set devices.
After they are successfully connected, the button changes to “Deactivate.”
ⓘ When this button is grayed out, you also need to enter the “AMBE+2 Vocoder Assignment” settings.

❸ **<Edit>** ..... Click to edit the entry.
ⓘ You can edit the settings in “Bridge Connection” on the above screen.
ⓘ Disconnect the connection before editing an entry.

❹ **<Delete>** ..... Click to delete the entry.
ⓘ You cannot restore after clicking <Delete>.

❺ **<Delete All>** ..... Click to delete all the settings in the list.
ⓘ You cannot restore after clicking <Delete All>.

Bridge Connection screen

Bridge Connection Settings > Bridge Connection

■ AMBE+2 Vocoder Assignment

Assigns the Voice Protocol and the AMBE+2 Vocoder to each port.

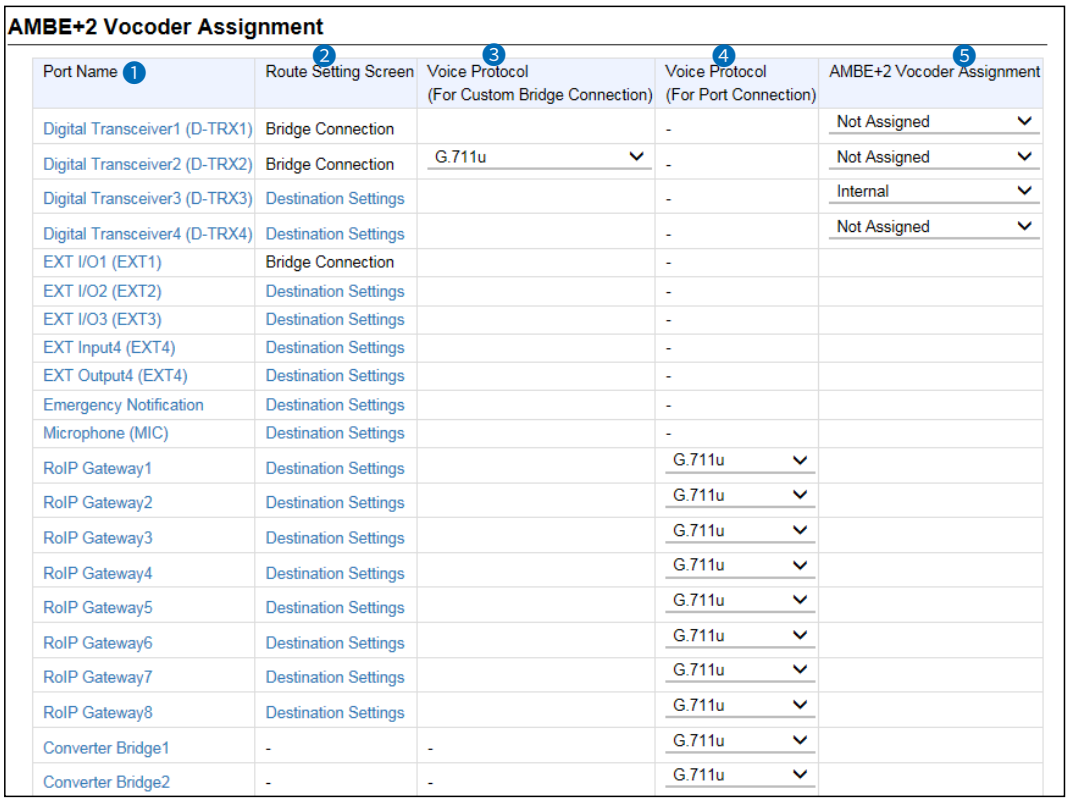

AMBE+2 Vocoder Assignment

Port Name ❶	Route Setting Screen ❷	Voice Protocol (For Custom Bridge Connection) ❸	Voice Protocol (For Port Connection) ❹	AMBE+2 Vocoder Assignment ❺
Digital Transceiver1 (D-TRX1)	Bridge Connection		-	Not Assigned
Digital Transceiver2 (D-TRX2)	Bridge Connection	G.711u	-	Not Assigned
Digital Transceiver3 (D-TRX3)	Destination Settings		-	Internal
Digital Transceiver4 (D-TRX4)	Destination Settings		-	Not Assigned
EXT I/O1 (EXT1)	Bridge Connection		-	
EXT I/O2 (EXT2)	Destination Settings		-	
EXT I/O3 (EXT3)	Destination Settings		-	
EXT Input4 (EXT4)	Destination Settings		-	
EXT Output4 (EXT4)	Destination Settings		-	
Emergency Notification	Destination Settings		-	
Microphone (MIC)	Destination Settings		-	
RoIP Gateway1	Destination Settings		G.711u	
RoIP Gateway2	Destination Settings		G.711u	
RoIP Gateway3	Destination Settings		G.711u	
RoIP Gateway4	Destination Settings		G.711u	
RoIP Gateway5	Destination Settings		G.711u	
RoIP Gateway6	Destination Settings		G.711u	
RoIP Gateway7	Destination Settings		G.711u	
RoIP Gateway8	Destination Settings		G.711u	
Converter Bridge1	-	-	G.711u	
Converter Bridge2	-	-	G.711u	

❶ Port Name ..... Lists the transceiver port of the RoIP gateway. Click to open to the Connection Port Settings screen of the port.

ⓘ The Converter Bridge setting screen (PBX extension > Converter Bridge) is displayed when a converter bridge's port name is clicked.

❷ Route Setting Screen ..... The screen setting the route of the destination is displayed. When the entry is set as a combination by the bridge connection, "Bridge Connection" is displayed. Otherwise, "Destination Settings" is displayed.

ⓘ Click the "Destination Settings" link to open the Destination Settings screen.

❸ Voice Protocol (For Custom Bridge Connection) ..... Displayed only when the Bridge Connection Destination (see above on this setting screen) is set to "Custom Bridge Connection." Set the voice protocol for the custom bridge connection to "G.711u," "Bridge Protocol," or "AMBE+2."

Bridge Connection screen

Bridge Connection Settings > Bridge Connection

■ AMBE+2 Vocoder Assignment

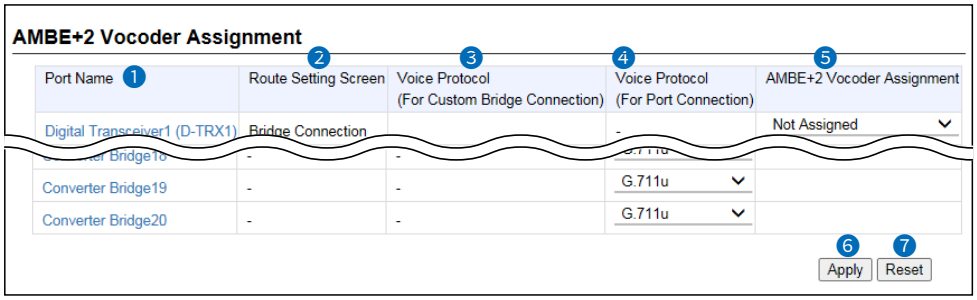

④ Voice Protocol (For Port Connection) .....

Set the voice protocol for the port connection to “G.711u,” “Protocol for Transceiver and SIP Phone Connection,” “Bridge Protocol,” or “AMBE+2.”

(Default for RoIP Gateway 1 ~ 8: G.711u, for Converter Bridge 1 ~ 20: G.711u)

ⓘ “Protocol for Transceiver and SIP Phone Connection” can be selected only with the Converter Bridge 1 ~ 20.
ⓘ If you connect to the IP1000C or IP1100CV, set this item to “Protocol for Transceiver and SIP Phone Connection.”
ⓘ If you connect to the VE-PG4, set this item to “Bridge Protocol.”

⑤ AMBE+2 Vocoder Assignment.....

Settable only when the Voice Protocol (④) is set to AMBE+2.
Select an AMBE+2 Vocoder from “Not Assigned,” “Internal,” or “CT-24.”
(Default for Digital Transceiver 1 ~ 4 (D-TRX1 ~ 4) : Internal)

- **Internal**: Assignable up to 4 ports.
- **CT-24**: Assignable up to 2 ports. (The optional CT-24 is required.)

ⓘ The AMBE+2 Vocoder for the Digital Transceiver 1 ~ 4 (D-TRX1 ~ 4) is fixed to the internal vocoder.
ⓘ When the settings of Bridge Connection Source and Bridge Connection Destination are set as the digital transceiver in [Bridge Connection] setting (Bridge Connection Settings > Bridge Connection > Bridge Connection), this item is not displayed.

⑥ <Apply> ..... Click to apply the entries.

⑦ <Reset> ..... Click to reset the settings.
ⓘ You cannot restore after clicking <Apply>.

SelCall in Bridge Connection screen

Bridge Connection Settings > SelCall in Bridge Connection

■ Save or Write the Rule Settings for SelCall in Bridge Connection

You can save or load the settings in “Rule Settings for SelCall in Bridge Connection” to or from a CSV format file.

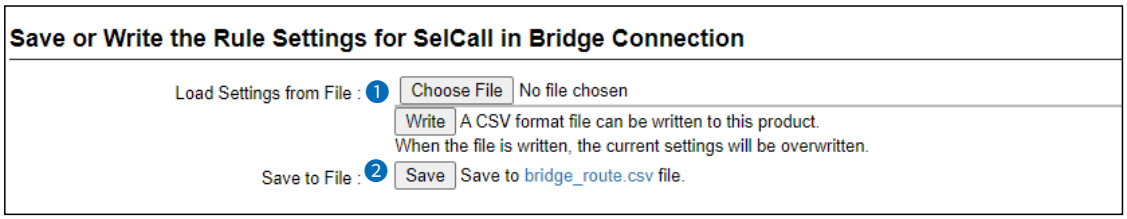

1 Load Settings from File … You can load the saved SelCall rule settings from a CSV format file.
Click <Choose File> and select the setting file (bridge_route.csv) from the displayed list, and then click <Open>.
Confirm the correct file is selected, and then click <Write> to load the settings from the selected file.
ⓘ Note that the previous settings are deleted when the setting file is loaded.

2 Save to File …… Saves the settings in the “Rule Settings for SelCall in Bridge Connection settings” to a CSV format file.
Click <Save> and select a folder to save the file into.
You can edit the saved file on a spreadsheet.

SelCall in Bridge Connection screen

Bridge Connection Settings > SelCall in Bridge Connection

■ Rule Settings for SelCall in Bridge Connection

Sets the rules to make an individual call from a Digital transceiver that is connected to the RoIP Gateway, through a Bridge Connection.

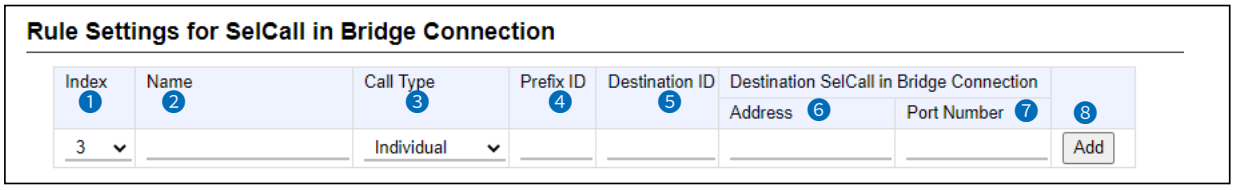

1 Index ..... The index assigned for entry.
Setting range: 1 ~ 1000

2 Name ..... Enter a name of up to 31 characters.

3 Call Type ..... Select the type of call.
- **Individual** : Call only a specified radio.
- **Group** : Call all transceivers that belong to the specified group.
- **All** : Call all transceivers.

4 Prefix ID ..... Enter the prefix ID of the SelCall destination.
ID range: (Depending on the system mode)

5 Destination ID ..... Enter the ID of the SelCall destination.
ID range: (Depending on the system mode)

Destination SelCall in Bridge Connection

6 Address ..... Enter the RoIP Gateway's IP address which is connected to the transceiver that will communicate with the SelCall destination.

7 Port Number ..... Enter the RoIP Gateway's port number which is connected to the transceiver that will communicate with the SelCall destination.

8 <Add> ..... Click to add a SelCall rule to the List of Rule Settings for SelCall in Bridge Connection.

SelCall in Bridge Connection screen

Bridge Connection Settings > SelCall in Bridge Connection

■ List of Rule Settings for SelCall in Bridge Connection

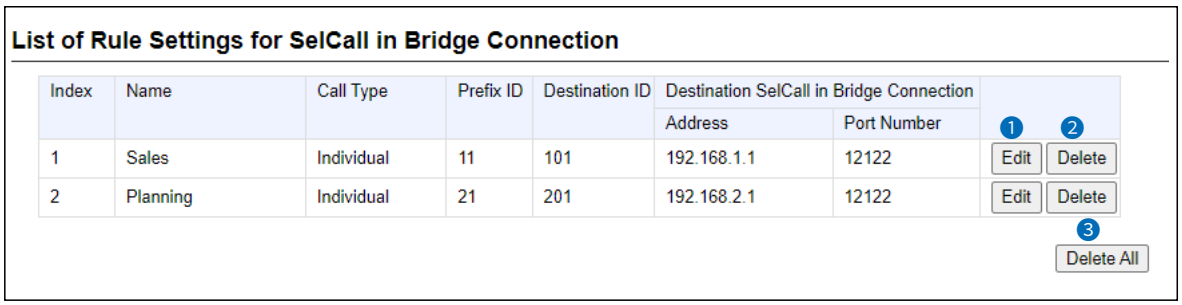

❶ **<Edit>** ..... Click to edit the entry.
ⓘ The registered contents are displayed on the Rule Settings for SelCall on the Bridge Connection screen.

❷ **<Delete>** ..... Click to delete the entry.
ⓘ You cannot restore after clicking <Delete>.

❸ **<Delete All>** ..... Click to delete all the settings.
ⓘ You cannot restore after clicking <Delete All>.

TRANSCEIVER CONTROLLER

Section 6

RoIP Settings screen 6-3
■ Additional Controller Settings 6-3
■ Advanced Settings 6-4
Tenant (Fleet) Settings screen 6-7
■ Tenant (Fleet) 6-7
RoIP Server screen 6-8
■ Call Type Priority 6-8
Telephone Gateway Interconnect screen 6-9
■ Telephone Gateway Interconnection 6-9
■ Telephone Gateway Interconnection Entry List 6-10
■ Telephone Gateway Interconnection Advanced Settings 6-11
Additional Controller Link screen 6-12
■ Link Setting 6-12
■ Linked Controller List 6-13
Area Call screen 6-14
■ Area Setting 6-14
■ Access Point Search 6-15
■ Area Entry List 6-17
Transceiver Management screen 6-18
■ Transceiver Management 6-18
Transceiver Registration screen 6-20
■ Transceiver Settings 6-20
■ Transceiver Setting Entry List 6-22
■ TRX Batch Setting 6-23
Transceiver Settings screen 6-24
■ Transceiver Settings [IP100H] 6-24
■ Transceiver Settings [IP110H] 6-56
■ Certificate Management [IP110H] 6-100
■ Copy Transceiver Settings 6-101
■ Transceiver Setting List 6-101
Wireless LAN screen 6-102
■ Wireless LAN 6-102
■ List of Wireless LAN Entries 6-113

ID List screen 6-114
■ ID List Common Settings 6-114
■ ID List Advanced Settings 6-114
■ Save or Write the ID List Setting 6-115
■ ID List 6-117
■ ID List Entries 6-119
Messages screen 6-120
■ Message Group 6-120
■ Message Group Detail 6-120
■ Save or Write the Message Setting 6-121
■ Message List 6-123
Status screen 6-124
■ Status Settings 6-124
Profile screen 6-125
■ Profile List 6-125
■ Profile 6-126
■ Profile Batch Setting 6-135

RoIP Settings screen

Transceiver Controller > RoIP Settings

■ Additional Controller Settings

Configure the Additional Controller Settings.
You can communicate with the WLAN transceivers, RC-FS20, and IP100FS that are registered to additional controllers.

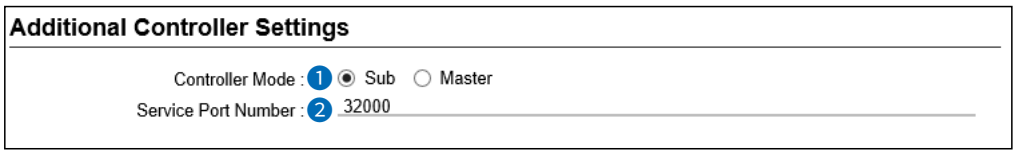

❶Controller Mode …… Select “Master” for one Master Controller. Select “Sub” for the other Controllers (up to 10 Sub Controllers can be set up). (Default: Sub)
When several Controllers are linked, and use All call or Group call between the controllers, set a controller as shown below.

- **Sub**: One Master Controller can be set up.
- **Master**: Up to 10 Sub Controllers can be set up.

❷Service Port Number …… Enter the port number for receiving audio signals. (Default: 32000)
- Range: “1024” ~ “65534” (only even numbers)

The port number (RTP) and the port number +1 (RTCP) are used for communication.

ⓘ This number is also used for the caller port number.
ⓘ Do not set a port number that has already been used by another connection setting.

RoIP Settings screen

Transceiver Controller > RoIP Settings

■ Advanced Settings

Set the V/RoIP details.
The items on the RoIP Settings screen differ, depending on the TOS type setting.

TOS Type: Not Used

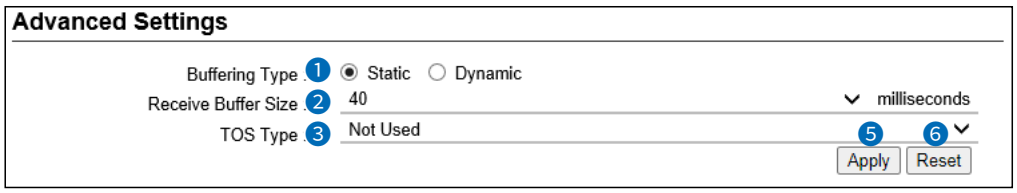

TOS Type: TOS

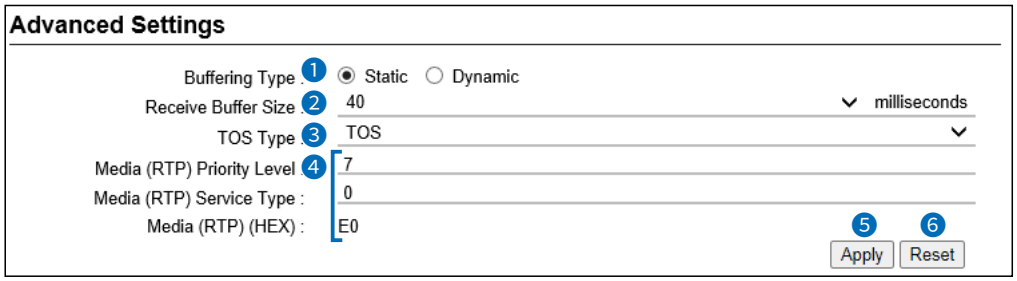

TOS Type: Diffserv

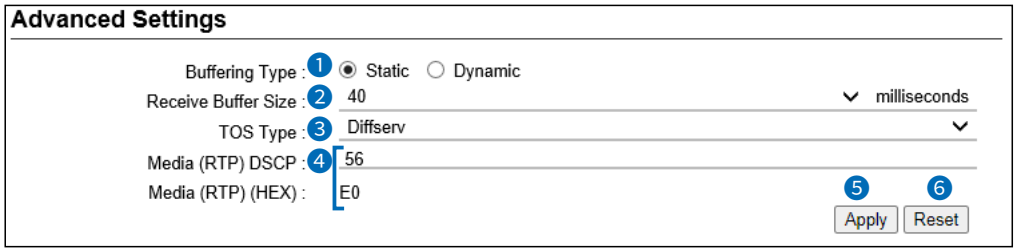

(These are examples of when the [Buffering Type] (❶) is set to “Static.”)

❶ Buffering Type ..... Select the buffer type to control any interrupted sound.
(Default: Dynamic)

- **Static**: The buffer time is set in [Receive Buffer Size] (❷).
- **Dynamic**: The buffer time changes, depending on the audio fluctuation.

❷ Receive Buffer Size ..... Select the buffer time to keep the audio from breaking up.
(Default: 40)

- Range: “20” ~ “1000” (milliseconds)

A shorter value improves the delay, but it may frequently break the audio signal.
ⓘ This item is displayed when [Buffering Type] (❶) is set to “Static.”

RoIP Settings screen

Transceiver Controller > RoIP Settings

■ Advanced Settings

TOS Type: Not Used

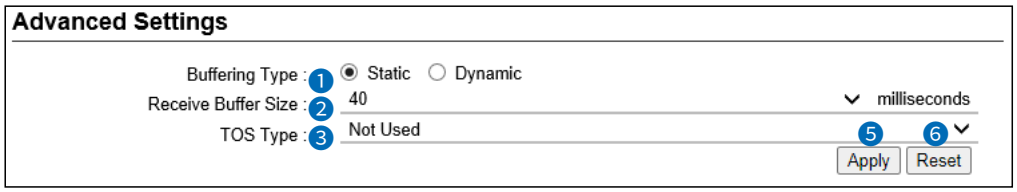

TOS Type: TOS

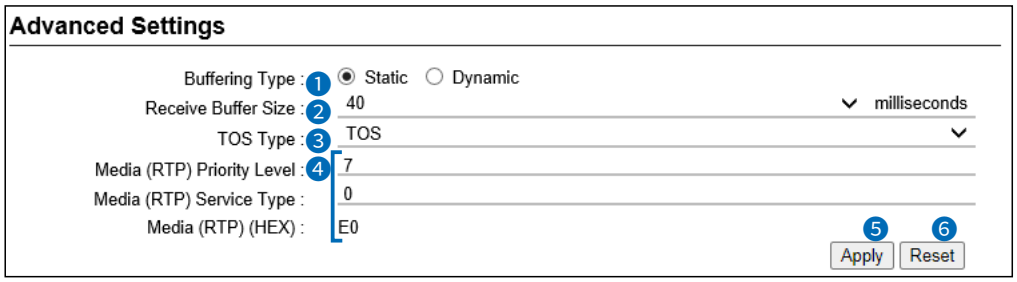

TOS Type: Diffserv

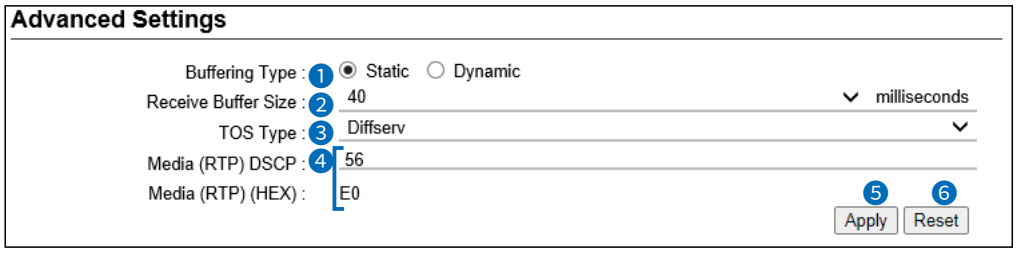

(These are examples of when the [Buffering Type] (1) is set to “Static.”)

3 TOS Type ..... Select the TOS (Type-Of Service) format. (Default: Not Used)

- **Not Used**: Does not use the TOS function.
- **TOS:** Sends the VoIP packets to the TOS field (8 bits) in the IP header using the TOS format.
  Sets to between 1 (lowest) and 3 bits (Priority level) or 4 and 7 (highest) bits (Type of Service) based on the RFC1349. The 1 bit remaining is not used and is fixed as 0.
- **Diffserv:** Sends the VoIP packets to the TOS field (8 bits) in the IP header using the Diffserv (Differentiated Service) format.
  Sets to between 1 and 6 bits (DSCP). The 2 bits remaining are not used and are fixed as 0.

RoIP Settings screen

Transceiver Controller > RoIP Settings

■ Advanced Settings

TOS Type: Not Used

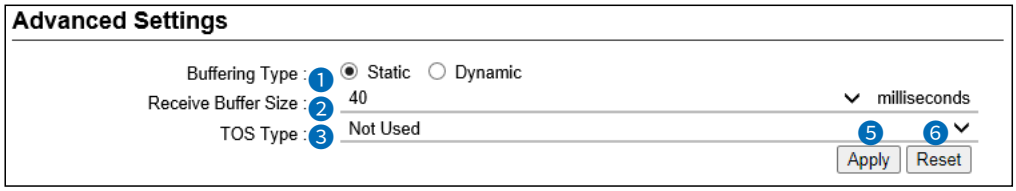

TOS Type: TOS

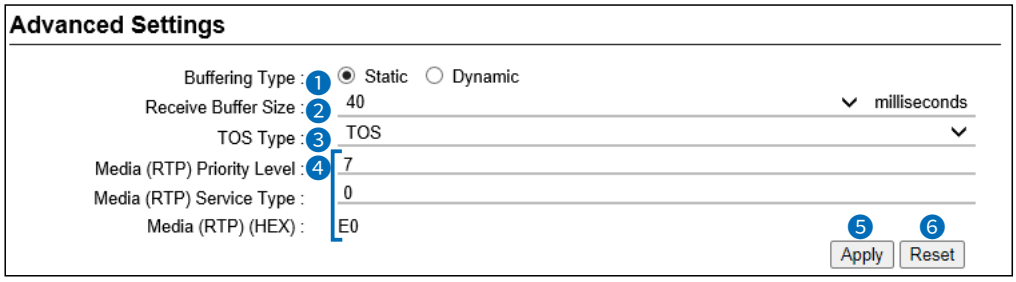

TOS Type: Diffserv

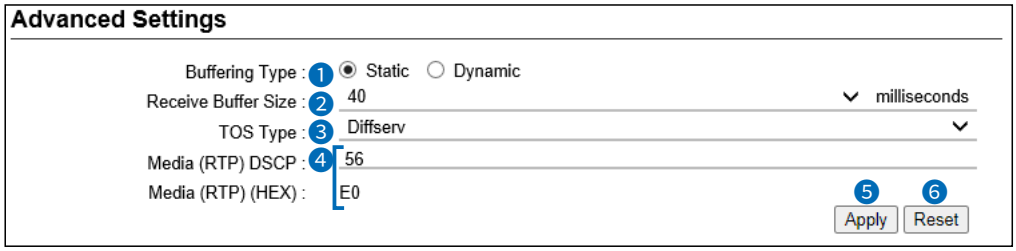

(These are examples of when the [Buffering Type] (❶) is set to “Static.”)

❹ Media (RTP) ..... Select the Priority level and Service type of the sent VoIP packets.

- **Media (RTP) Priority Level**
  Set the TOS priority level to between 0 (lowest) and 7 (highest). (Default: 7)
- **Media (RTP) Service Type**
  Set the TOS service type code to between 0 and 15. (Default: 0)
- **Media (RTP) DSCP**
  Set the DSCP (Differentiated Services Code Point) code to between 0 and 63. (Default: 56)

❺ <Apply> ..... Click to apply the entries.

❻ <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Tenant (Fleet) Settings screen

Transceiver Controller > Tenant (Fleet) Settings

■ Tenant (Fleet)

The tenant (fleet) divides the WLAN transceivers, RC-FS20s, or IP100FSs that belong to the RoIP Gateway, for system management purposes. (Example: Security company/Management company)

ⓘ The terminals cannot communicate among different tenants (fleets).
ⓘ Select the tenant (fleet) number between 1 to 10.
ⓘ All WLAN transceivers, RC-FS20s, and IP100FSs that belong to the RoIP Gateway are activated in one tenant (fleet).

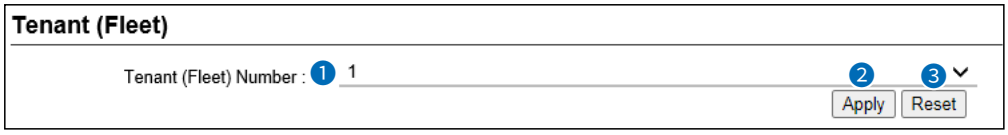

❶ Tenant (Fleet) Number …… Select the tenant (fleet) number that is used. (Default: 1)

The tenant (fleet) number is displayed in the following menus.
- RoIP Server Settings
- Transceiver Settings
- Common Settings (Except Wireless LAN menu)
- Destination Settings



(This is an example when [Tenant (Fleet) Number] (❶) is set to “1.”)

❷ <Apply> …… Click to apply the entries.

❸ <Reset> …… Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

RoIP Server screen

Transceiver Controller > RoIP Server Settings > RoIP Server

■ Call Type Priority

Select the priority level of the call types.

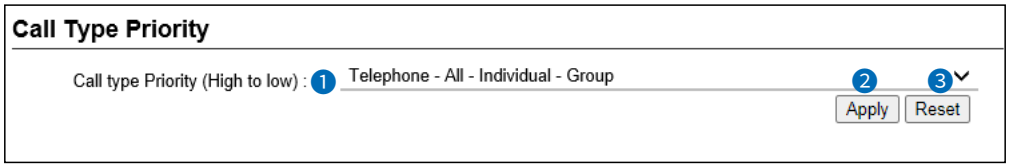

❶ Call type Priority (High to low) Select the priority level of the call types.
(Default: Telephone – All – Individual – Group)

ⓘ The setting values are shown below.

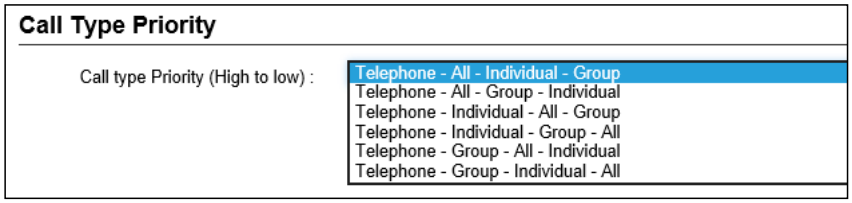

❷ <Apply> ..... Click to apply the entries.

❸ <Reset> ..... Click to reset the settings.

ⓘ You cannot reset after clicking <Apply>.

Telephone Gateway Interconnect screen

Transceiver Controller > RoIP Server Settings > Telephone Gateway Interconnect

■ Telephone Gateway Interconnection

Set the Telephone Gateway Interconnection with a bridge destination device.

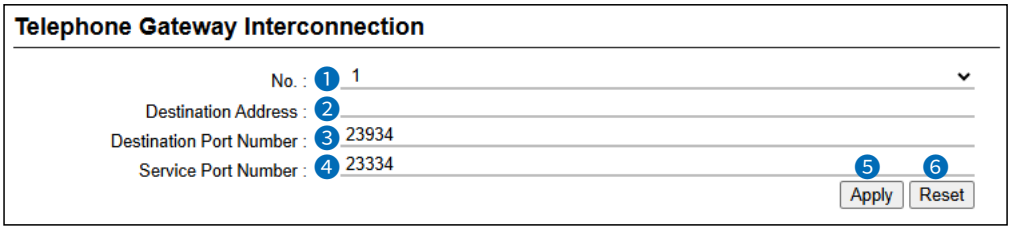

❶ No. ..... Select the number that is registered to a device.
Up to 4 devices can be registered.

❷ Destination Address ..... Enter the destination device's IP address or domain name of up to 63 characters.

❸ Destination Port Number ... Enter the port number of the destination RoIP gateway.
- Range: 2 ~ 65534 (only even numbers)

ⓘ The set port number (RTP) and the port number +1 (RTCP) are used for the communication.

❹ Service Port Number ..... Enter the port number for receiving audio signals.
- Range: 2 ~ 65534 (only even numbers)

ⓘ **Information**
- The set port number (RTP) and the port number +1 (RTCP) are used for the communication.
- This number is also used for the caller port number.
- Do not set the port number which has already been used by another connection setting.

❺ <Apply> ..... Click to apply the entries.

❻ <Reset> ..... Click to restore the settings.
ⓘ You cannot restore after clicking <Apply>.

Telephone Gateway Interconnect screen

Transceiver Controller > RoIP Server Settings > Telephone Gateway Interconnect

■ Telephone Gateway Interconnection Entry List

Displays the list of the registered device for the Telephone Gateway Interconnection.

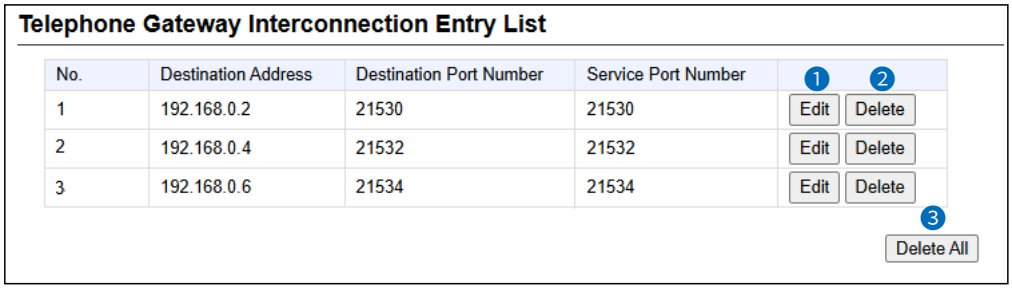

❶ **<Edit>** ..... Click to edit the setting on the [Telephone Gateway Interconnection].

❷ **<Delete>** ..... Click to delete the selected entry.
ⓘ After clicking <Delete>, the content cannot be recalled.

❸ **<Delete All>** ..... Click to delete all the entries.
ⓘ L After clicking <Delete All>, the contents cannot be recalled.

Telephone Gateway Interconnect screen

Transceiver Controller > RoIP Server Settings > Telephone Gateway Interconnect

■ Telephone Gateway Interconnection Advanced Settings

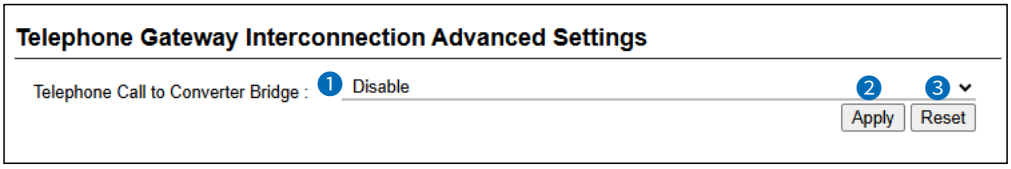

❶ Telephone Call to Converter Bridge: ..... Select whether a transceiver makes a call to a converter bridge through the Telephone Gateway Interconnection or not.
If enabled, the port priority of telephone call will be Telephone Gateway 1 > 2 > 3 > 4 >Transceiver Controller Telephone Connection.

❷ <Apply> ..... Click to apply the entries.

❸ <Reset> ..... Click to restore the settings.
ⓘ You cannot restore after clicking <Apply>.

Additional Controller Link screen

Transceiver Controller > RoIP Server Settings > Additional Controller Link

■ Link Setting

This is a setting to link with other WLAN transceiver controllers, VE-PG3s (Bridge mode), or VE-PG4s.

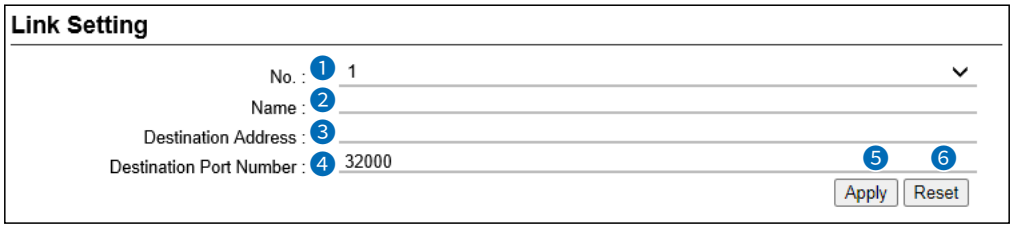

❶ No. ..... Select a number between 1 and 100 to register the other transceiver controllers. (Default: 1)

❷ Name ..... Enter the group name of up to 31 characters.

❸ Destination Address ..... Enter the destination device's IP address or domain name of up to 63 characters.

❹ Destination Port Number ... Enter the destination controller's service port number in [Additional Controller Link].

(Default: 32000)

Range: "2" ~ "65534" (only even numbers)

ⓘ The set port number (RTP) and the port number +1 (RTCP) are used for communication.

❺ <Apply> ..... Click to apply the entries.

ⓘ The entries are displayed in [Linked Controller List].

❻ <Reset> ..... Click to reset the settings.

ⓘ You cannot reset after clicking <Apply>.

Additional Controller Link screen

Transceiver Controller > RoIP Server Settings > Additional Controller Link

■ Linked Controller List

Display a list of the destination addresses and destination port numbers registered to the RoIP Gateway.

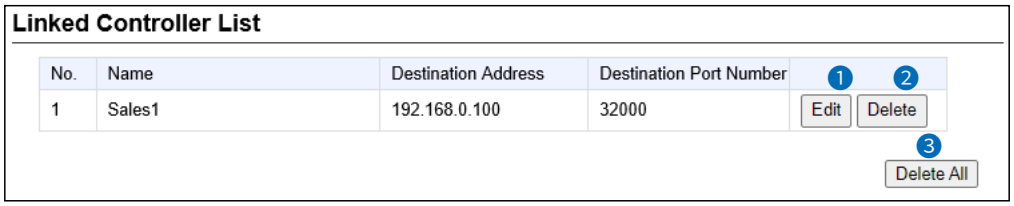

❶ **<Edit>** ..... Click to edit the entry in [Link Setting].

❷ **<Delete>** ..... Click to delete the selected entry.
ⓘ After clicking <Delete>, the entry cannot be recalled.

❸ **<Delete All>** ..... Click to delete all the entries.
ⓘ After clicking <Delete All>, the entries cannot be recalled.

Area Call screen

Transceiver Controller > RoIP Server Settings > Area Call

■ Area Setting

The Area Call function limits communication with the devices in the specified area.
When a WLAN transceiver makes an All call or Group call using the Area Call function, it calls other WLAN transceivers, RC-FS20s, or IP100FSs in the same area.
ⓘ If you want to use the Area call from an RC-FS20 or IP100FS, specify the area by selecting the desired access points.

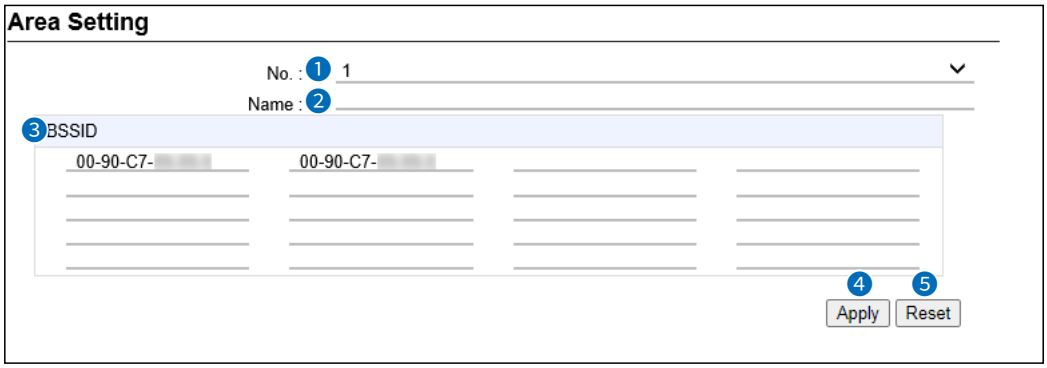

1 No. ..... Select the number that is registered to the Area Call. (Default: 1)
ⓘ Up to 20 calls can be registered.

2 Name ..... Enter the area name of up to 31 characters.

3 BSSID ..... Enter the 12 digit BSSID of the wireless access point in the area. When several access points are added, they are recognized as one area.
ⓘ Up to 20 access points can be registered to the area.

4 <Apply> ..... Click to add the entries.
ⓘ The entries are displayed in [Area Entry List].

5 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

The WLAN transceiver makes All calls in the area

Example: The wireless access points “Sales” and “Accounts” are registered in the same area. The access point “Parts” is registered in a different area.
In that case, two WLAN transceivers in the same area receive the call, but the WLAN transceiver in the different area will not receive it.

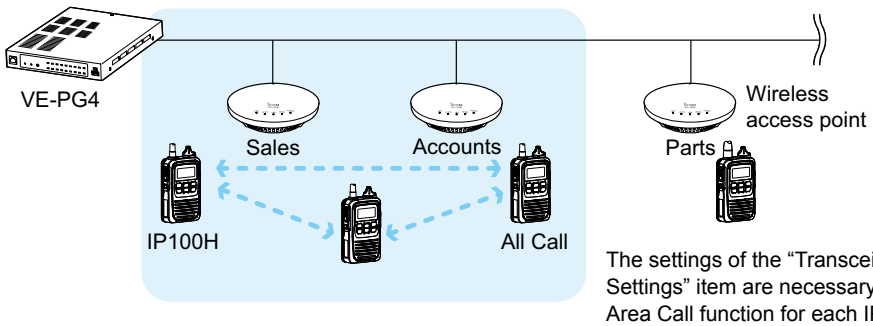

The settings of the “Transceiver Settings” item are necessary to use the Area Call function for each IP100H.

Area Call screen

Transceiver Controller > RoIP Server Settings > Area Call

■ Access Point Search

The RoIP Gateway can search for access points the network, and register access points for Area Calls.
ⓘ Icom guarantees this function only for the AP-90M and AP-95M. (As of April 2026)

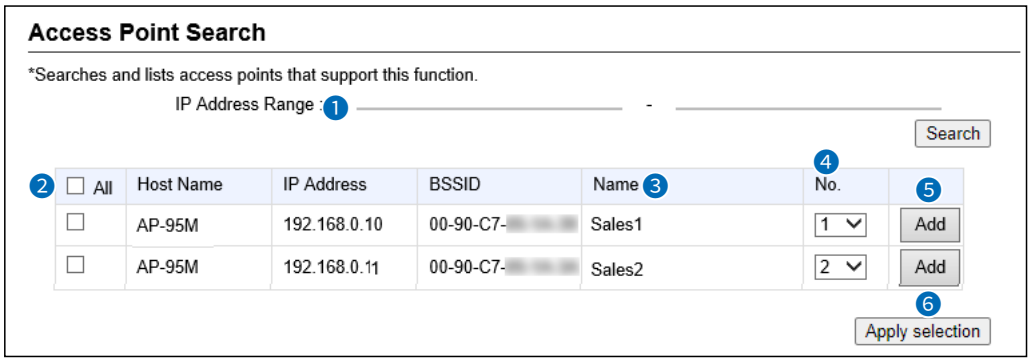

1 IP Address Range ..... Click the <Search> button after entering the IP address range of the access points.
When starting a search, the button changes to both <Refresh> and <Cancel>.
The discovered access point information will be displayed in a list.
ⓘ When only IP start address is entered, a search starts.
ⓘ If BSSID is already registered in the Area Entry List, it is not displayed.
ⓘ When the [IP Advanced Radio System] setting of an access point that is set to "Enable" in [Notification] that is same Tenant (Fleet) Number with the RoIP Gateway, and a name is registered, you can search for the BSSID and name. When it is set to "Disable," you cannot search with the RoIP Gateway.

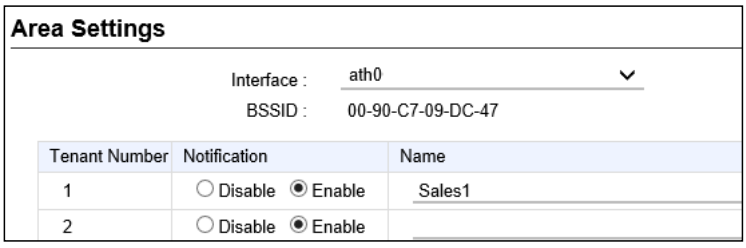

(AP-95M Wireless LAN1 IP Advanced Radio System screen)

2 Check Box ..... Click a Check Box to add a check mark for registering a discovered access point.
ⓘ By clicking [All], you can select or cancel all access points in the list.

3 Name ..... The name that is set in [IP Advanced Radio System] of an access point is displayed.
ⓘ An area name is registered on [Number] in [Area Setting].

Area Call screen

Transceiver Controller > RoIP Server Settings > Area Call

■ Access Point Search

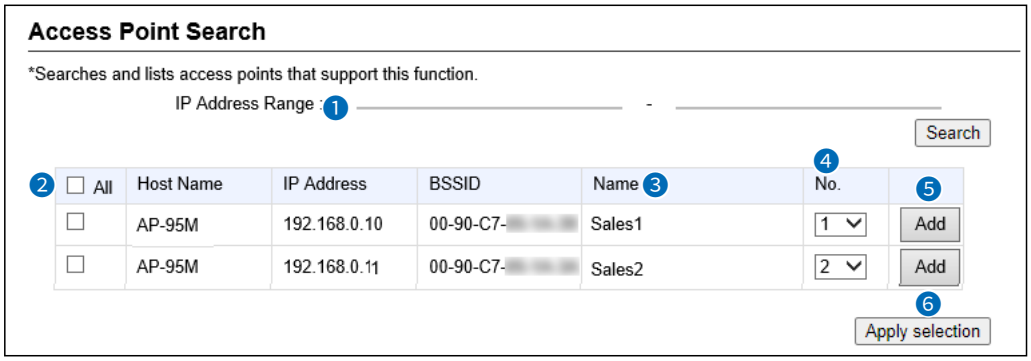

4 No. ..... Select an area to register from a “Number” in [Area Setting]. When an area number that is already registered is selected, BSSID is added to the area number.

ⓘ If the area number is already registered in [Area Call], it cannot be selected.

ⓘ An area number is selected, depending on the name that is registered with the same Tenant (Fleet) Number in [IP Advanced Radio System] of an access point, as shown below.

- When the area number’s name is already registered in [Area Setting], the area number is selected (A blank is also recognized as a part of the name).
- When the area number’s name is not registered in [Area Setting], an unused and initial area number is selected.

5 <Add> ..... Click to register a discovered access point in [Access Point Search].

6 <Apply selection> ..... Click to register a selected access point in [Check Box] (2).

Area Call screen

Transceiver Controller > RoIP Server Settings > Area Call

■ Area Entry List

Display the list of the registered [Area Setting] or [Access Point Search].

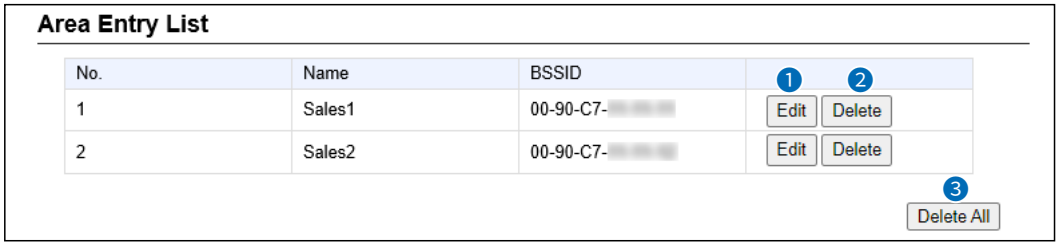

❶ **<Edit>** ..... Click to edit the setting in [Area Setting].

❷ **<Delete>** ..... Click to delete the selected entry.
ⓘ After clicking <Delete>, the entry cannot be recalled.

❸ **<Delete All>** ..... Click to delete all the entries.
ⓘ After clicking <Delete All>, the entries cannot be recalled.

Transceiver Management screen

Transceiver Controller > Transceiver Settings > Transceiver Management

■ Transceiver Management

The RoIP Gateway can monitor the registered WLAN transceivers, RC-FS20s, and IP100FSs. The RoIP Gateway can reboot the registered all WLAN transceivers, if necessary.

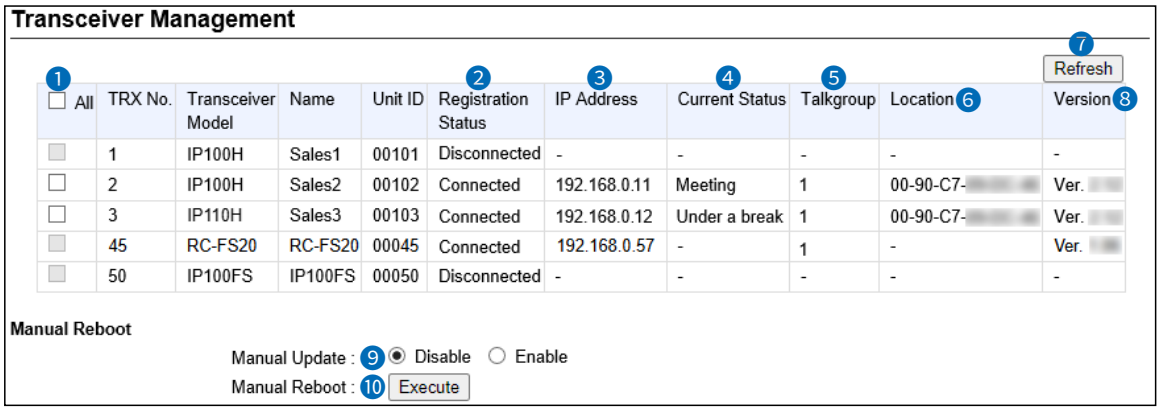

ⓘ A WLAN transceiver is displayed in bold when a setting is changed and a reboot is required.

❶ Check Box .....

Click a Check Box to add a check mark to the WLAN transceiver that you want to reboot.

ⓘ You can select only the WLAN transceivers that are displayed as "Connected" in [Registration Status]. The RC-FS20s and IP100FSs are not selectable regardless of their registration status.

ⓘ By clicking the [All] box, you can select or cancel all WLAN transceivers in the list.

❷ Registration Status .....

Displays the WLAN transceivers', RC-FS20s' or IP100FSs' Registration Status as either "Connected" or "Disconnected."

ⓘ Displays "Disconnected" if the WLAN transceiver is turned OFF or the RC-FS20's or IP100FS's application is not running.

ⓘ When the RoIP Gateway sends the reboot command to a WLAN transceiver from the [Transceiver Management] menu, the following status are displayed:
"Receiving reboot command," "Reboot command reception success," "Reboot command reception failed," "Ready to reboot," "Rebooting," "Updating," "Update failed," "Downloading," "Status notification failed," "Low battery," and "Programming with software."

❸ IP Address .....

Displays the IP Addresses of the WLAN transceivers, RC-FS20s, or IP100FSs.

ⓘ When [Registration Status] displays "Disconnected," "–" is displayed.

❹ Current Status .....

Displays the Current Status of the WLAN transceivers.
(Example: In a meeting)

ⓘ Information

- If the Status function is set to OFF, "–" is displayed.
- If you click the <Refresh> (❼) button, the latest status will be displayed.
- When the WLAN transceiver is remotely locked by the RC-FS20 or IP100FS, and it cannot communicate with others or cannot transmit, "Transmit and receive disabled" or "Transmit disabled" is displayed.
- If the WLAN transceiver is sending an emergency call, "Emergency" is displayed.

Transceiver Management screen

Transceiver Controller > Transceiver Settings > Transceiver Management

■ Transceiver Management

Transceiver Management

Refresh (7)

(1) All	TRX No.	Transceiver Model	Name	Unit ID	(2) Registration Status	(3) IP Address	(4) Current Status	(5) Talkgroup	Location (6)	Version (8)
	1	IP100H	Sales1	00101	Disconnected	-	-	-	-	-
	2	IP100H	Sales2	00102	Connected	192.168.0.11	Meeting	1	00-90-C7-	Ver.
	3	IP110H	Sales3	00103	Connected	192.168.0.12	Under a break	1	00-90-C7-	Ver.
	45	RC-FS20	RC-FS20	00045	Connected	192.168.0.57	-	1	-	Ver.
	50	IP100FS	IP100FS	00050	Disconnected	-	-	-	-	-

Manual Reboot

Manual Update : (9) Disable / Enable

Manual Reboot : (10) Execute

ⓘ A WLAN transceiver is displayed in bold when a setting is changed and a reboot is required.

(5) Talkgroup ..... Displays the Talkgroup IDs that are selected by the WLAN transceivers, RC-FS20s, or IP100FSs.

ⓘ When a Talkgroup name is registered, a Talkgroup number (name) is displayed.

ⓘ While a WLAN transceiver, RC-FS20, or IP100FS does not select a Talkgroup, or [Registration Status] displays “Disconnected,” “–” is displayed.

(6) Location ..... Displays the BSSIDs of the wireless access points that the WLAN transceivers are connected to.

ⓘ When [Registration Status] displays “Disconnected,” “–” is displayed.

(7) <Refresh> ..... Click to reload the Registration Status.

ⓘ The connection status of the WLAN transceiver, RC-FS20, or IP100FS, or the activation status check of when the WLAN transceiver, RC-FS20, or IP100FS reboots are renewed.

(8) Version ..... Displays the version of the WLAN transceivers, RC-FS20s, or IP100FSs that are registered to the RoIP Gateway.

ⓘ When [Registration Status] displays “Disconnected,” “–” is displayed.

(9) Manual Update ..... Enable to manually update the WLAN transceiver firmware when the RoIP Gateway sends Manual Reboot ((10)) to the WLAN transceiver. When the WLAN transceiver is ready to update the firmware, “F” blinks on the display, and then the WLAN transceiver automatically reboots and starts the firmware update.
(Example: IP100H)

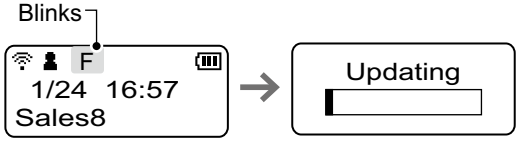

ⓘ When the WLAN transceiver has failed to prepare a firmware update, it does not automatically reboot. If necessary, send a reboot command to the WLAN transceiver.

(10) Manual Reboot ..... Click <Execute> to reboot all of the WLAN transceivers that are selected in [Check Box] ((1)).

Transceiver Registration screen

Transceiver Controller > Transceiver Settings > Transceiver Registration

■ Transceiver Settings

Register the WLAN transceiver, RC-FS20, or IP100FS settings.
ⓘ After the registration is completed, you must reboot the WLAN transceiver.

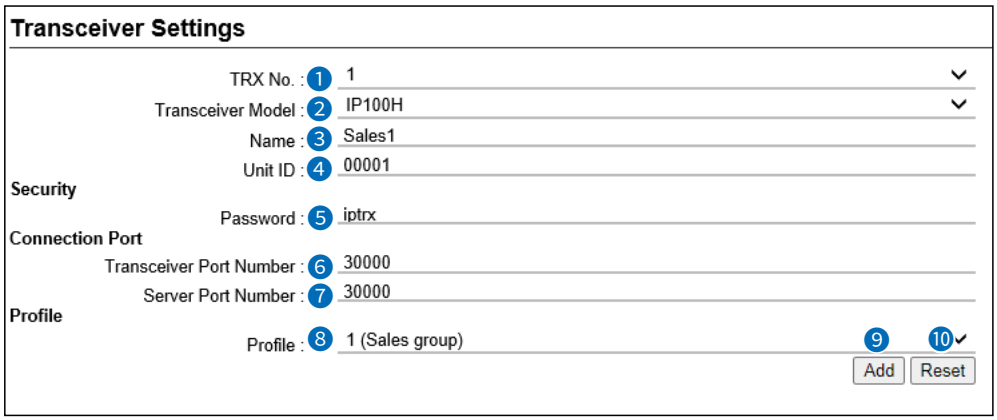

❶ TRX No. ..... Selects the number that the WLAN transceiver, RC-FS20, or IP100FS is registered to. (Default: 1)
ⓘ Up to 50 terminals can be registered.

❷ Transceiver Model ..... Select a WLAN transceiver model. (Default: IP100H)

❸ Name ..... Enter a transceiver name of up to 31 characters.

❹ Unit ID ..... Enter an individual number between 00001 and 60000. (Default: 00001)

❺ Password ..... Enter a password to access to the RoIP Gateway. (Default: iptrx)
ⓘ Up to 12 characters, lower or upper letters, numbers, and symbols can be used.

❻ Transceiver Port Number Enter the port number (UDP port) that the WLAN transceiver will use to communicate with the RoIP Gateway.

ⓘ **Information**
- The set port number (RTP) and the port number +1 (RTCP) are used for communication.
- We basically recommend that you use the default port number.
- The default number differs, depending on [TRX No.], as shown below.
  Default: TRX No. 1 (30000), TRX No. 2 (30002), TRX No. 3 (30004),
  TRX No. 4 (30006), ..., TRX No. 50 (30098)
- Setting range: Even numbers between 2 and 59998.
  Some numbers may not be usable.
- Do not set the port number that has already been used by another connection setting.
- When [Transceiver Model] (❷) is set to “RC-FS20” “IP100FS,” the port number is not displayed.

Transceiver Registration screen

Transceiver Controller > Transceiver Settings > Transceiver Registration

■ Transceiver Settings

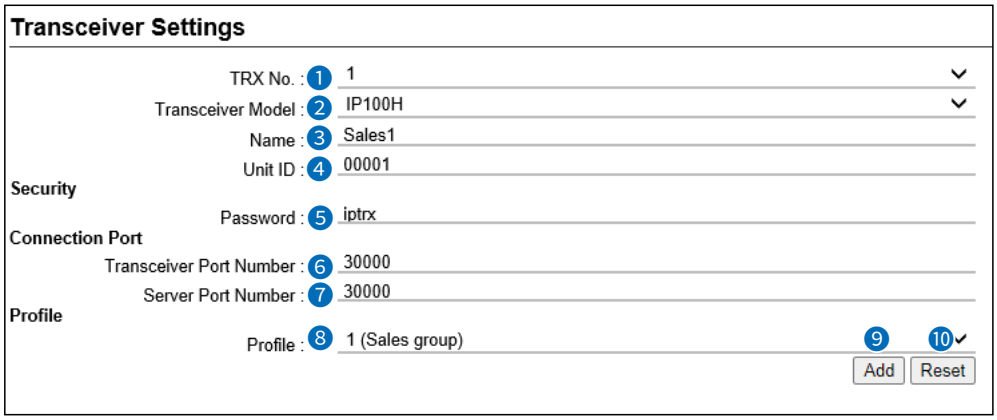

7 Server Port Number ..... Enter a port number (UDP port) that the RoIP Gateway will use to communicate with the WLAN transceiver, RC-FS20, or IP100FS.

ⓘ Information
- The set port number (RTP) and the port number +1 (RTCP) are used for communication.
- We basically recommend that you use the default port numbers.
- The default number differs, depending on the [TRX No.] as shown below.
  Default: TRX No. 1 (30000), TRX No. 2 (30002), TRX No. 3 (30004),
  TRX No. 4 (30006), ..., TRX No. 50 (30098)
- Setting range: Even numbers between 2 and 65534.
  Some numbers may not be usable.
- Do not set a port number that has already been used by another connection setting.

8 Profile ..... Select the Profile number that the WLAN transceiver, RC-FS20, or IP100FS belongs to. (Default: 1)
ⓘ The numbers 1 to 50 are selectable.
ⓘ Set the Profile setting in the [Common Settings] menu, such as ID list, message, or Receive notification tone settings.

9 <Add> ..... Click to add the entries.
ⓘ The entries are displayed in [Transceiver Setting Entry List].

10 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Add>.

Transceiver Registration screen

Transceiver Controller > Transceiver Settings > Transceiver Registration

■ Transceiver Setting Entry List

The list of the registered WLAN transceivers. RC-FS20s, or IP100FSs.

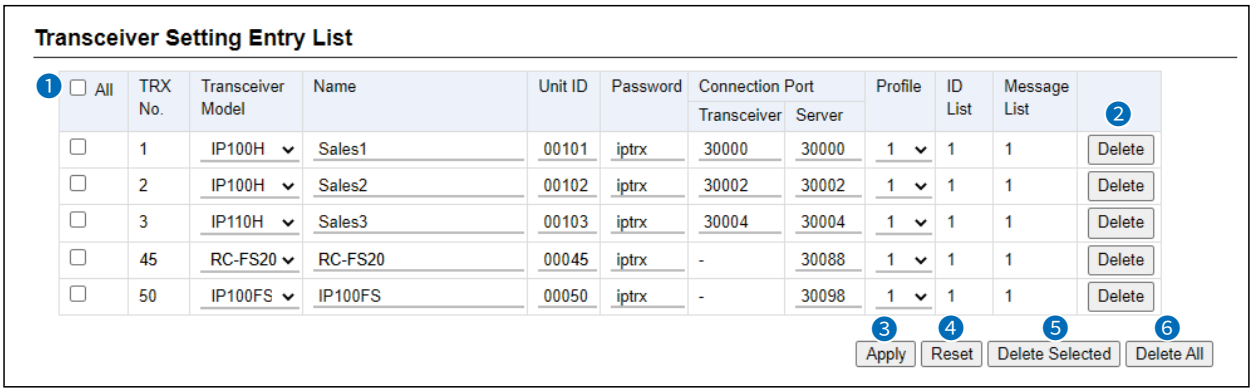

❶ Check Box ..... Click a Check Box to add a check mark to delete an entry.
ⓘ By clicking the [All] box, you can select or cancel all entries in the list.

❷ <Delete> ..... Click to delete the selected entry.
ⓘ After clicking <Delete>, the entry cannot be recalled.

❸ <Apply> ..... Click to apply the entries.
ⓘ The entries that are edited in [Transceiver Setting Entry List] are registered.

❹ <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

❺ <Delete Selected> ..... Click to delete an entry that you select in the Check Box (❶).
ⓘ After clicking <Delete Selected>, the entry cannot be recalled.

❻ <Delete All> ..... Click to delete all the entries.
ⓘ After clicking <Delete All>, the entries cannot be recalled.

Transceiver Registration screen

Transceiver Controller > Transceiver Settings > Transceiver Registration

■ TRX Batch Setting

You can register consecutive Destination IDs collectively. Or you can copy the Destination ID contents to another ID.

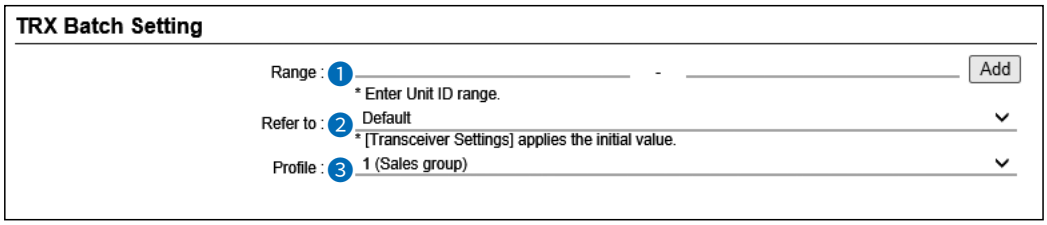

❶ Range ..... Enter a range of collective Destination IDs.

Click <Add> to register consecutive Destination IDs collectively in the box.

ⓘ If a Destination ID is already registered, “Overwrite the following entry” is displayed.

❷ Refer to ..... Select the default settings or the programmed settings to refer to. (Default: Default)

❸ Profile ..... Select the profile number that WLAN transceivers, RC-FS20s or IP100FSs belong to. (Default: 1)

ⓘ The numbers 1 to 50 are selectable.

ⓘ You can set an ID List, Message List, or Notification beep setting for each profile in the [Common Settings] menu.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

Individually assign the functions, or set the receive notification tone to a registered IP100H.
ⓘ After the setting is completed, you must reboot the IP100H.

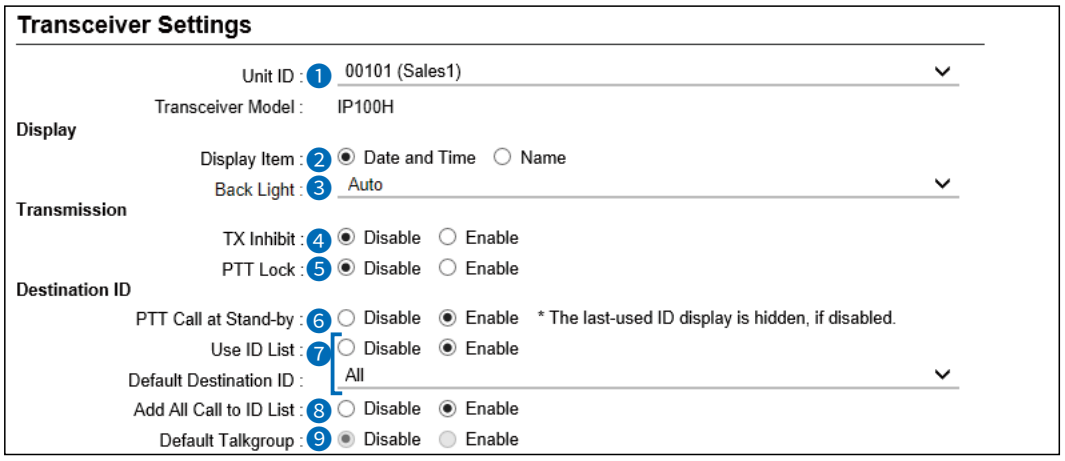

❶ Unit ID .....

Select the IP100H's Individual number (Name) that you want to edit.
ⓘ Only the individual numbers of the IP100H are selectable.
The individual number that the [Transceiver Model] on the [Transceiver Registration] screen is set to "RC-FS20" or "IP100FS," cannot be selected.

❷ Display Item .....

Select whether or not the IP100H displays the Date and Time or its Name in the standby mode. (Default: Date and Time)



(Date and Time)



(Name)

ⓘ If the [Name] on the [Transceiver Registration] screen has not been entered, and this setting is set to [Name], the IP100H displays the individual number.

❸ Back Light .....

Select the IP100H backlight function. (Default: Auto)

- **OFF**: The backlight does not light.
- **ON**: The backlight lights continuously.
- **Auto**: The backlight lights when an operation is performed, and goes out after 5 seconds.

❹ TX Inhibit .....

Select "Enable" to inhibit the IP100H's transmission. (Default: Disable)
ⓘ When this setting is set to "Enable," the IP100H also cannot transmit with an optional microphone, or using the VOX function.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

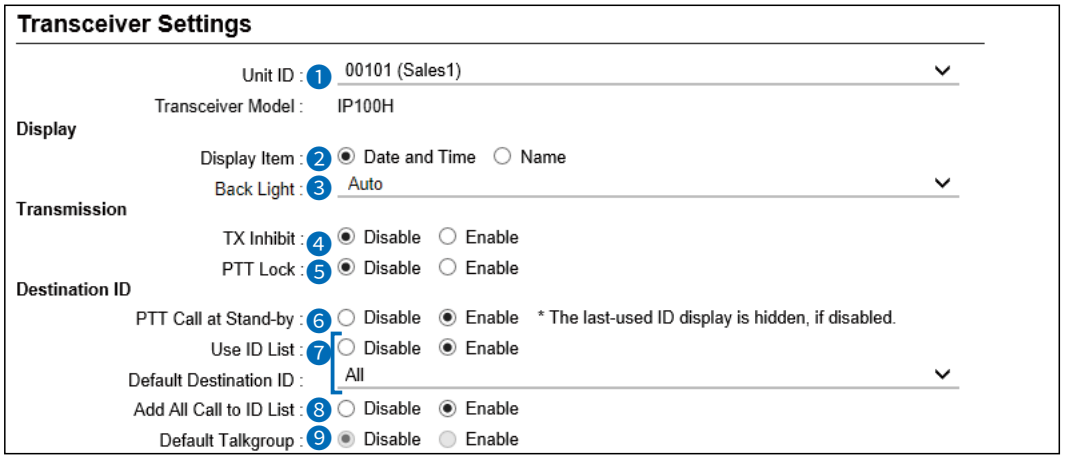

5 PTT Lock ..... Select “Enable” to lock the IP100H’s PTT switch. (Default: Disable)

ⓘ When this setting is set to “Enable,” the IP100H cannot transmit by holding down its PTT switch, but it can transmit with an optional microphone or using the VOX function as well.

6 PTT Call at Stand-by ..... Select whether or not the IP100H displays the Destination ID (Call type) in the standby mode. (Default: Enable)

- **Disable:** The Destination ID (Call type) is not displayed in the standby mode.
  ⓘ The Destination ID (Call type) is displayed when you select the ID using the function keys.
- **Enable:** The Destination ID (Call type) is displayed in the standby mode.
  ⓘ When the PTT on the IP100H is pushed, the IP100H calls the displayed ID (Call type).

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

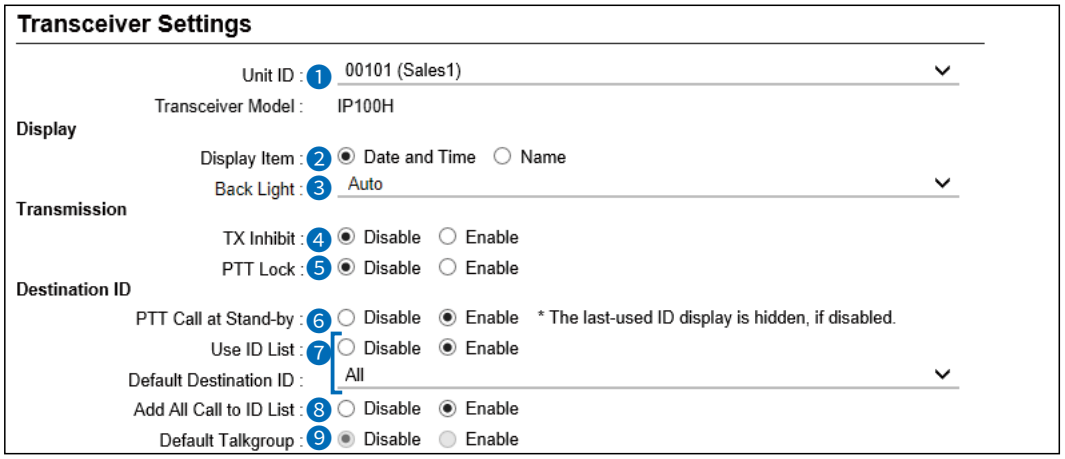

7 Use ID List .....

(Address) key

Select whether or not the IP100H uses the ID list. (Default: Disable)

- **Disable:**
  The call type is fixed to that which is selected in the [Call Type], as shown below, even if you push the [(Address)] key on the IP100H.
  ⓘ If you set the Call Type to “Individual” or “Group,” enter a destination ID between 1 to 60000 in the [Destination ID]. (Default: All)
  ⓘ Even if “Disable” is selected, the IP100H displays a received ID in the ID list.



- **Enable:**
  The call type is changed by pushing the [(Address)] key on the IP100H. Select First Call ID from All, or an ID number (1 to 50) that is displayed when the IP100H is turned ON, in [Call Type].
  ⓘ The ID list is selected on the [Common Settings] screen.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

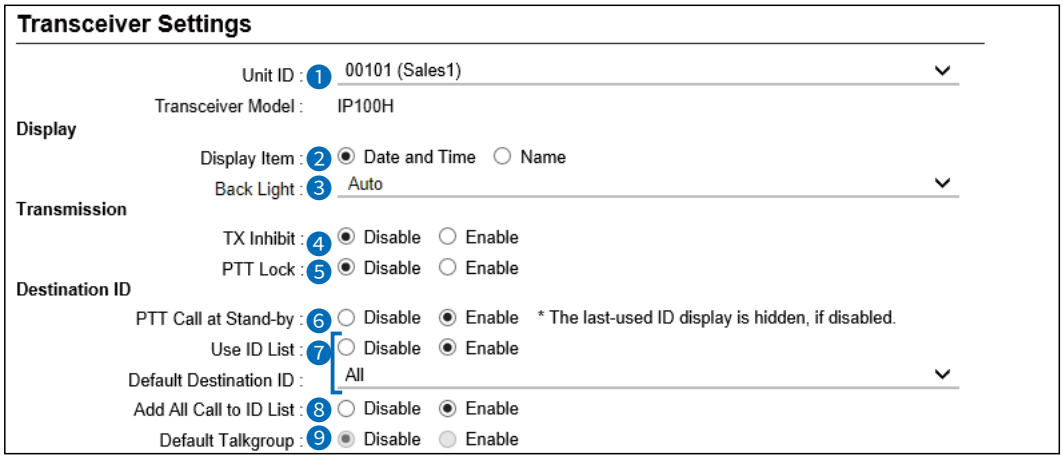

8 Add All Call to ID List ..... Select whether or not to display All Call in the ID list of the IP100H. (Default: Enable)

- **Disable**
  Does not display “All” in the ID list.
  ⓘ When “Disable” is selected in [Add All Call to ID List], you cannot select an All call using the [📖] key.

- **Enable**
  ⓘ When [Use ID List] (7) is set to “Enable,” set [Add All Call to ID List] and [Default Talkgroup].

9 Default Talkgroup ..... Select a Talkgroup if you want to set the IP100H to join a Talkgroup when you turn ON the power. (Default: Disable)

- **Disable**
  The IP100H starts up without joining any Talkgroup. The ID that is set in the “Default Destination ID” in [Use ID List] (7) is displayed when the IP100H is turned ON.

- **Enable**
  The IP100H joins the selected Talkgroup when it is turned ON.
  ⓘ When [Use ID List] (7) is set to “Disable,” this item is not displayed.



Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

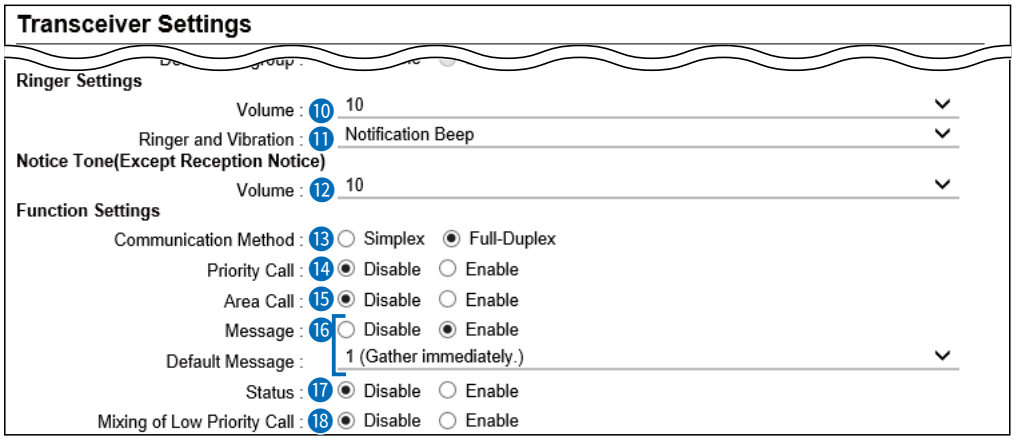

ⓘ The screen shows when the Message (⑯) is set to “Enable.”

⑩ Volume ..... Set the beep level when the IP100H receives a Call or message to between 0 and 32. (Default: 10)

ⓘ When this setting set to “0,” the notification beep is turned OFF.

ⓘ The notification beep is individually set for the Call type or message in [Notification Tone] on the[Profile] screen in the [Common Settings] menu.

⑪ Ringer and Vibration..... Set the action when the IP100H receives a Call or message to “Notification Beep,” “Vibration” or “Notification Beep + Vibration.” (Default: Notification Beep)

- **Notification Beep**
  When the IP100H receives a Call or message, the specified Notification beep sounds, depending on the Call or message. The notification beep is set in [Notification Tone] on the [Profile] screen in the [Common Settings] menu.

- **Vibration**
  When the IP100H receives a Call or message, it vibrates for notification.

- **Notification Beep + Vibration**
  When the IP100H receives a Call or message, it vibrates and the Notification beep sounds for notification.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

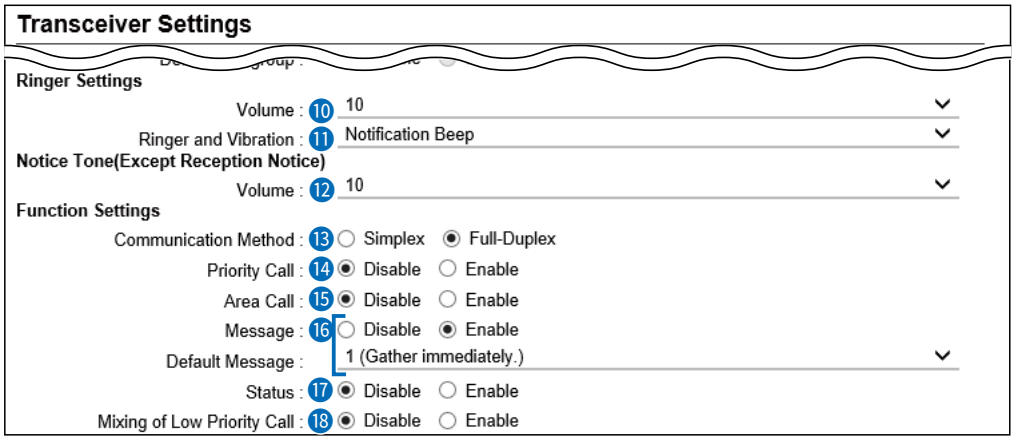

ⓘ The screen shows when the Message (⑯) is set to “Enable.”

⑫ Volume (Except Reception Notice)

Set the beep level when the IP100H is transmitting a Call or connecting to the RoIP Gateway, to between 0 and 32. (Default: 10)

ⓘ When this setting is set to “0,” the notification beep is turned OFF.

ⓘ Depending on the [Common Settings], the IP100H sounds a beep when the IP100H is transmitting or connecting to the RoIP Gateway.

⑬ Communication Method …

Select the communication method that the IP100H uses. (Default: Full-Duplex)

- **Simplex:** Toggles the transmission (Talker) and reception (Listener) for communication.
- **Full-Duplex:** Simultaneously transmits and receives, like a telephone.
  ⓘ When connecting the optional microphone to the IP100H, you can operate the IP100H like a telephone.

Simplex and Full-Duplex

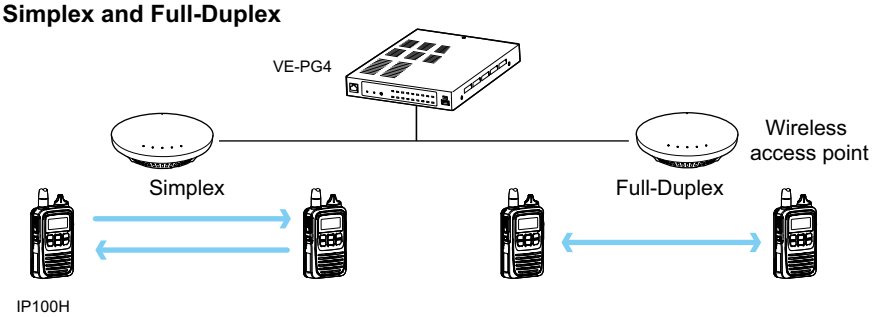

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

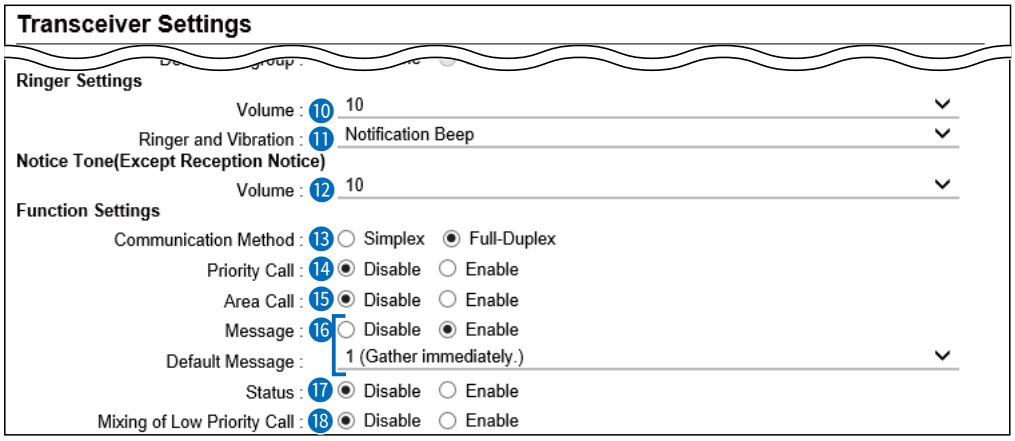

ⓘ The screen shows when the Message (16) is set to "Enable."

14 Priority Call ..... Select whether or not the IP100H uses Priority Call.

(Default: Disable)

The priority levels of the Call types are in the following order.

Priority level	Priority	Call type	Priority Call	Remarks
High ↑	Fixed	Telephone	—	For telephone communication
		Emergency (High)	Enable	—
		Emergency (Normal)	Disable	—
	Selectable *	All Call (High)	Enable	Includes the Area Call or using an RC-FS20 or IP100FS
		Individual Call (High)	Enable	Includes using an RC-FS20 or IP100FS
		Group Call (High)	Enable	Includes the Area Call or using an RC-FS20 or IP100FS
		All Call (Normal)	Disable	Includes the Area Call
		Individual Call (Normal)	Disable	—
↓ Low		Group Call (Normal)	Disable	Includes the Area Call

* Selectable in the Call Type Priority on the [RoIP Server] screen in the [RoIP Server Settings] menu.

ⓘ Priority is given to the first call between calls with the same priority level.

ⓘ When a call is taken, priority is given to the setting of the caller.

Example:
Even while B and C are talking on a Group Call from A, B can make an Individual Call (High) to C.
In this case, the Group Call is canceled.

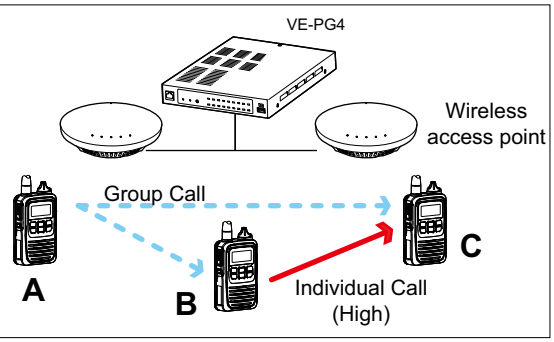

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

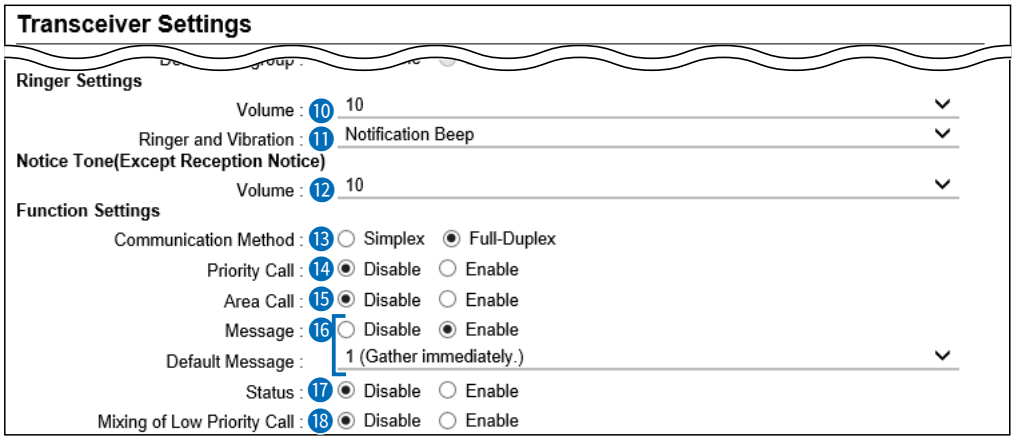

ⓘ The screen shows when the Message (⑯) is set to “Enable.”

⑮ Area Call ..... Select whether or not the IP100H uses Area Call.

(Default: Disable)

When the IP100H calls All Call or Group Call using the Area Call function, it calls only other IP100Hs, RC-FS20s, or IP100FSs in the area that is connected to the same wireless access point.
When the BSSID that IP100H is connecting is registered in [Area Setting] (Transceiver Controller > RoIP Server Settings > Area Call), this function is activated.

Example:
IP100H makes an All Call with the Area Call function

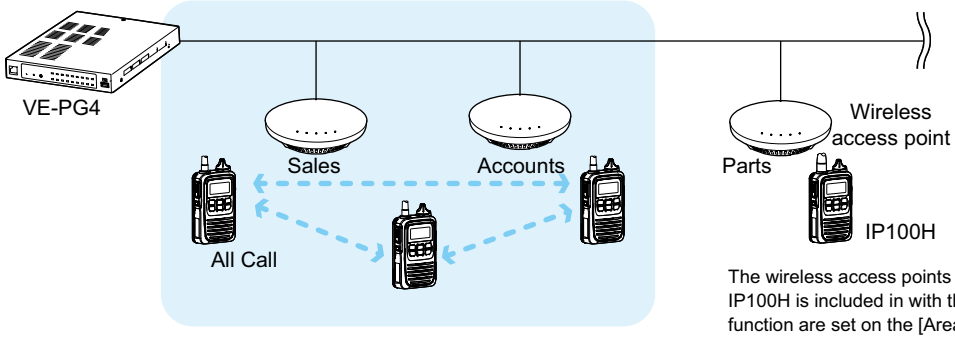

The wireless access points that the IP100H is included in with the Area Call function are set on the [Area Call] screen in the [RoIP Server Settings] menu. (Example: For Sales and For Accounts)

IP100FS calls the All Call with the Area Call function

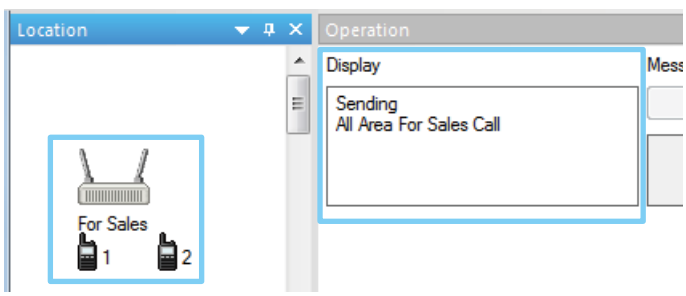

When the IP100FS uses Area Call function, the IP100FS can call IP100Hs that are in the communication range of the access points assigned to the Area Call.
When the access point is selected in the [Location], the Call type (Individual, Group, All, Area, or Telephone) and names are displayed.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

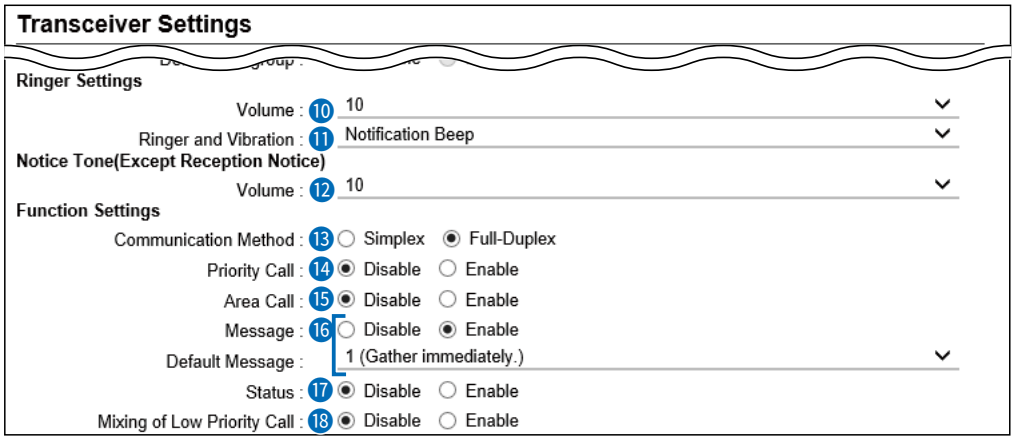

ⓘ The screen shows when the Message (16) is set to "Enable."

16 Message ..... Select whether or not the IP100H can send messages.

(Default: Disable)

When "Enable" is selected, push the [FUNC] key on the IP100H once to enter the Message selection screen.

ⓘ Up to 10 messages of 32 characters or less can be programmed on the [Messages] screen in the [Common Settings] menu.

ⓘ Select the message number 1 to 10 in [Default Message] that is registered on the [Message] screen.

Example:

IP100H transmits a message

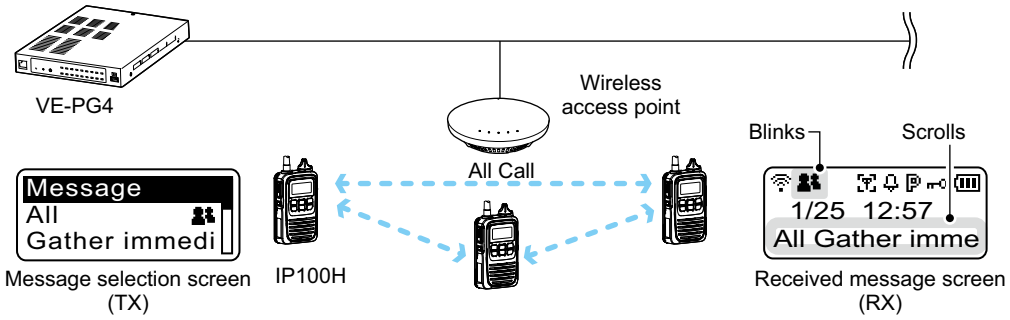

IP100FS transmits a message

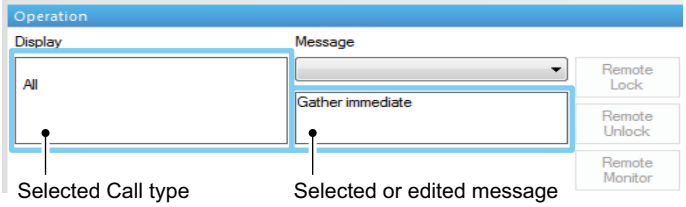

The IP100FS can store up to 100 messages in each site.
You can edit the stored messages.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

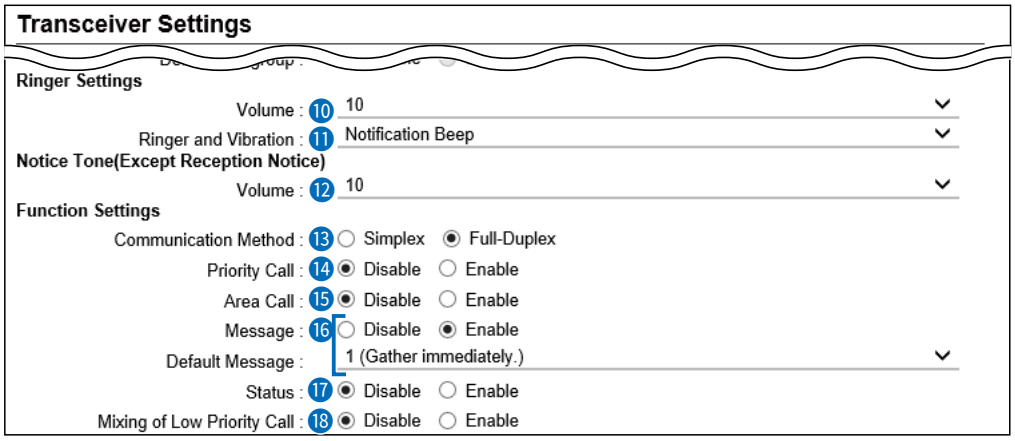

ⓘ The screen shows when the Message (⑯) is set to “Enable.”

⑰ Status ..... Select whether or not the IP100H can send Status information. (Example: At lunch, Meeting, Waiting) (Default: Disable)
When “Enable” is selected, push the [FUNC] key on the IP100H twice to enter the Status selection screen.

ⓘ Up to 10 statuses of 32 characters or less can be entered on the [Status] screen in the [Common Settings] menu.

ⓘ The status that the IP100H sends can be displayed on the [Transceiver Management] screen in the [Transceiver Settings] menu or the One-Touch button of the remote communicator.

Example:

IP100H sends the Status

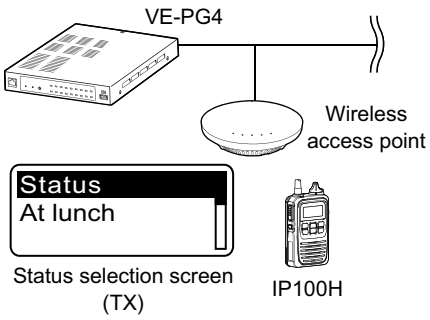

IP100FS One-Touch button

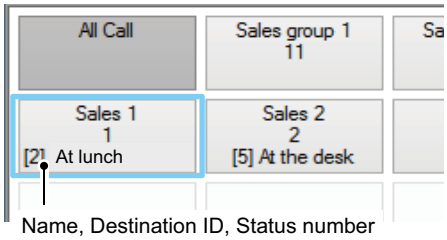

VE-PG4 Transceiver Management screen

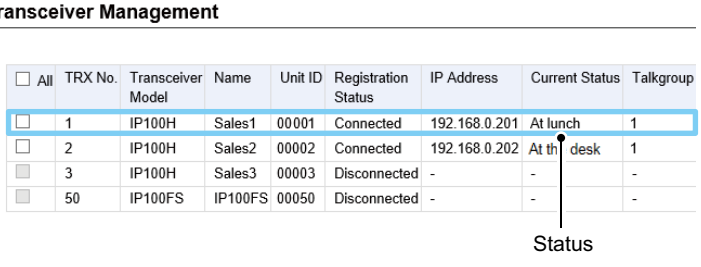

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

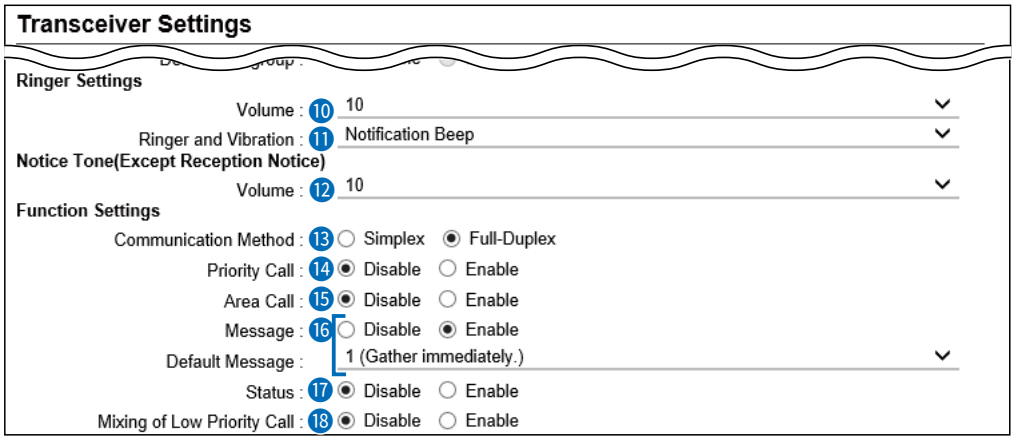

ⓘ The screen shows when the Message (⑯) is set to “Enable.”

⑱ Mixing of Low Priority Call

Select whether or not the IP100H receives Mixed audio.

(Default: Disable)

When this setting is set to “Enable,” the RoIP Gateway sends the mixed audio of all calls that call the IP100H.

ⓘ The IP100H displays the called station that has the highest priority in the mixed audio.
See page 6-30 for details of the Priority level.

• Mixing of Low Priority Call

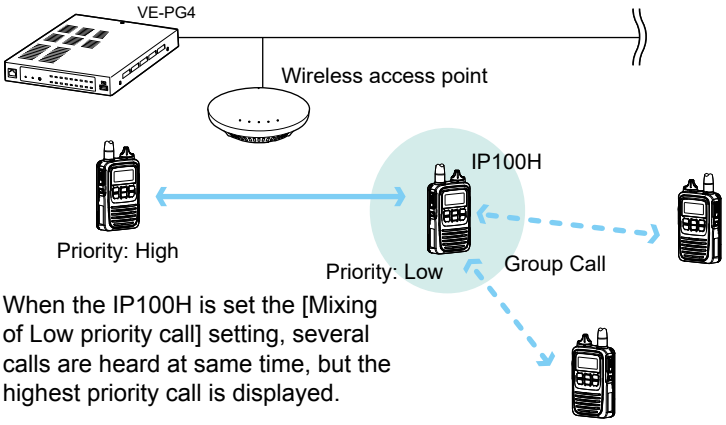

When the IP100H is set the [Mixing of Low priority call] setting, several calls are heard at same time, but the highest priority call is displayed.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

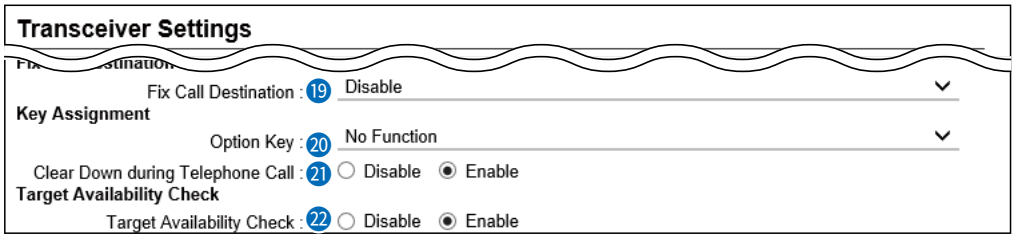

⑲ Fix Call Destination .....

Select whether or not the IP100H uses the Fix Call Destination function.
(Default: Disable)

When this setting is set to other than “Disable,” the IP100H calls the preset destination instead of the selected destination that is displayed on the third line. The Fix Call Destination function separates the fixed call from the general calls by the specified method to start transmission.





Call type is set to All



Call type is set to Group

- **Disable**
  The Fix Call Destination is not specified, and the IP100H calls the selected destination.

- **PTT**
  The Fix Call Destination is specified as PTT transmission.
  When [PTT] is held down, the IP100H calls the preset destination.



(Example: All call is specified to the PTT)

- **Earphone Mic or Headset**
  The Fix Call Destination is specified as the external Mic transmission.
  When the external microphone’s PTT switch is held down, or its VOX function is active, the IP100H calls the preset destination.

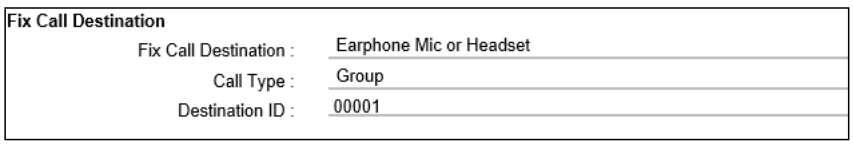

(Example: Group call is specified to the Earphone Mic or Headset)

ⓘ Information

- Set the Call type to “Individual,” “Group,” or “All.”
- When the “Call Type” is set to “Individual” or “Group,” enter the Individual ID or Group ID between 00001 to 60000 in the [Destination ID].
- The Destination ID, Name (if [Name] is selected in the [Display Item] (②)) or Call type of the Fix Call Destination is displayed on the 2nd line.
  (Usually Date and Time or Own Name is displayed on the 2nd line.)
- When the IP100H receives a call with this setting, it does not display the Caller’s ID or Call type on the 3rd line.
- When both of the IP100H’s [PTT] and external microphone’s PTT switch are held down, the external PTT has priority and the internal microphone will be muted.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

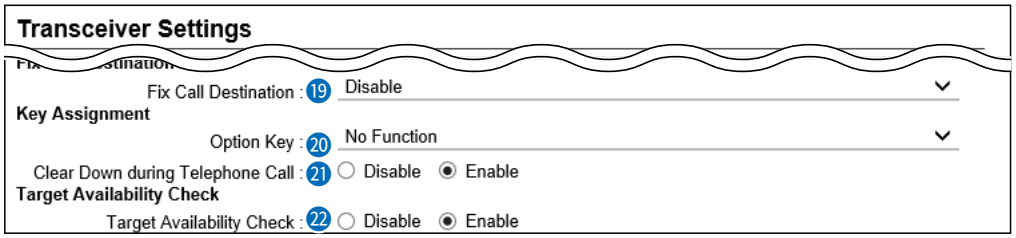

20 Option Key ..... Assign “Message,” “One Touch,” “Clear Down,” “Mute,” “Emergency,” or “No Function” to the IP100H’s [Option] key. (Default: No Function)

ⓘ When this setting is set to “No Function,” nothing changes by pushing the [Option] key on the IP100H in the standby mode.

- **Message**

  Pushing the [Option] key on the IP100H displays the Message selection screen.

  ⓘ Select the message number 1 to 10 in the [Message No.] that is displayed on the [Message] screen.



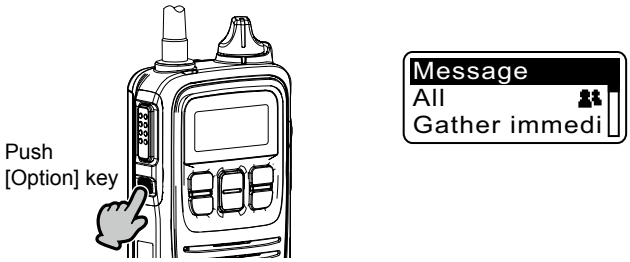

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

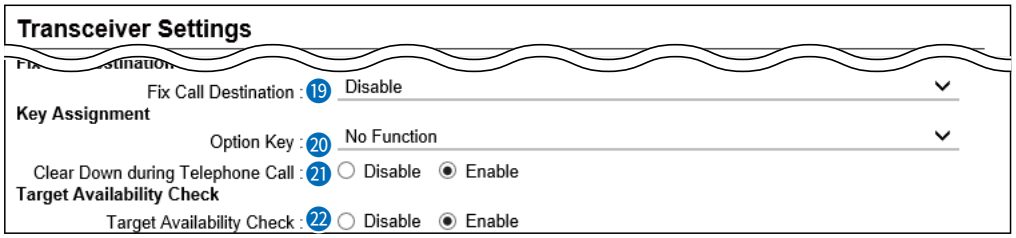

⑳ Option key.....

- **One Touch**
  Pushing the [Option] key on the IP100H selects a specified Call type and destination ID or phone number.
  Select the “Individual,” “Group,” “All,” or “Telephone” Call type.
  ⓘ When “Individual” or “Group” is selected, enter the Individual ID or Group ID between 00001 to 60000 in the [Destination ID].
  ⓘ When “Telephone” is selected, enter up to 31 numbers and symbols (#, ＊) in the [Destination Phone Number].

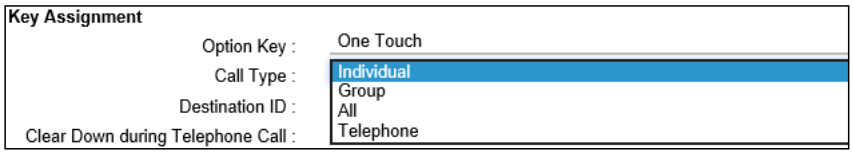



Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

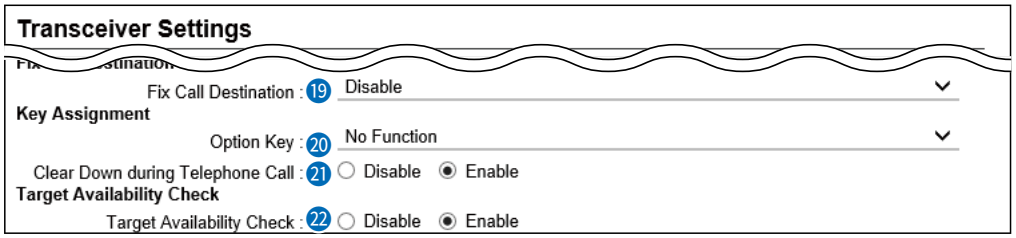

⑳ Option key.....

- **Clear Down**
  Pushing the [Option] key on the IP100H terminates the phone call with an IP phone.
  ⓘ You can assign another function if you select “Enable” on [Clear Down during Telephone Call] (㉑).





When the [Option] key is pushed before a phone call is received, or during telephone call, the phone call is terminated.
ⓘ The phone call is terminated from the IP100H, only when the IP100H is individually called from a telephone, or when the IP100H calls a telephone.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

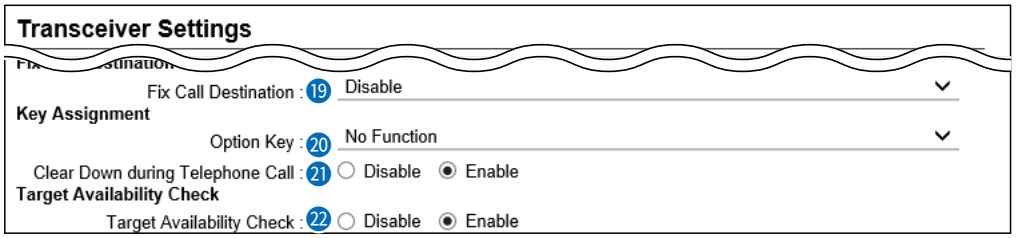

20 Option key.....

• **Mute**

Hold down the [Option] key for 1 second on the IP100H when you want to mute the received audio. (The Notification beep cannot be muted.)
Hold down the [Option] key for 1 second to turn the Mute function ON or OFF.

ⓘ You can turn OFF the Mute function by pushing [PTT]. However, selecting "Enable" in the [Clear Down during Telephone Call] (21), terminates the phone call.

ⓘ If you select "Enable" in [Mute Automatic Release], turn OFF the Mute function after a specified period of time has passed. (Default: Disable)
If you select "Enable," set the period of time to release the Mute function to between 10 to 600 (seconds). (Default: 60 (seconds))

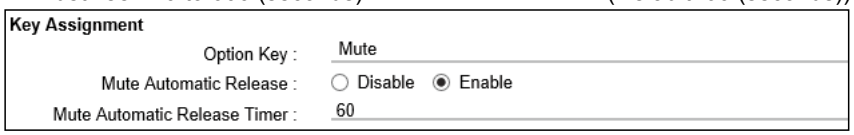



Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

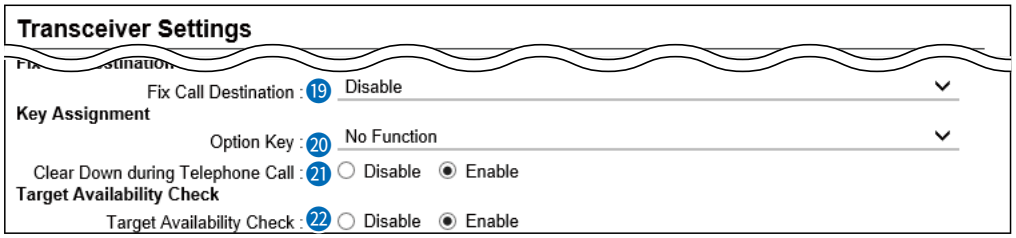

20 Option key.....

- **Emergency**
  Hold down the [Option] key until “Emergency” is displayed to send an Emergency call.
  When the Emergency call is sent, an alarm sounds. The Emergency call is canceled and the alarm stops when the transceiver receives a response, or the [Option] key of the transceiver is held down.
  ⓘ You can set the period of time to send the Emergency call, and sound the alarm, in [Emer SW ON Timer] (35).
  ⓘ When “Enable” is selected in [Emer SW OFF] (36), you can set the period of time to cancel the Emergency call and stop the alarm.



NOTE:
The RoIP Gateway should not be used when high reliability is necessary.
The communication cannot be made, depending on the environment around the RoIP Gateway, such as the consumption of a battery, the signal environment, or the access point or network status.
Use the [Emergency] and [Lone Worker] functions as a supplementary function.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

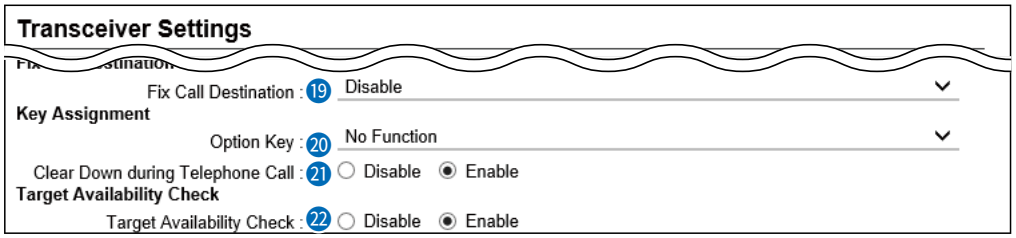

21 Clear Down during Telephone Call

Select “Enable,” if you want to terminate a phone call by pushing the IP100H’s [Option] key. (Default: Enable)

ⓘ When “Clear Down” is selected on the [Option Key] (20), this item is not displayed.



Before the target telephone is picked up, or during a phone call, pushing the [Option] key terminates the phone call.

ⓘ The IP100H can terminate the phone call, when a telephone calls the IP100H individually, or when the IP100H calls a telephone.

22 Target Availability Check…

Select whether or not the IP100H displays a confirmation after it makes an Individual Call. (Default: Enable)

When “Enable” is selected, the IP100H displays the “Connected,” “Busy” or “No response” connection status.



ⓘ When the target station is out of range, “No response” is displayed.

ⓘ If the [Connection Notice Tone] is set to “Enable,” the Success Tone or Failure Tone sounds to notify its connection status.
(Transceiver Controller > Common Settings > Profile > Profile > Connection Notice Tone)

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

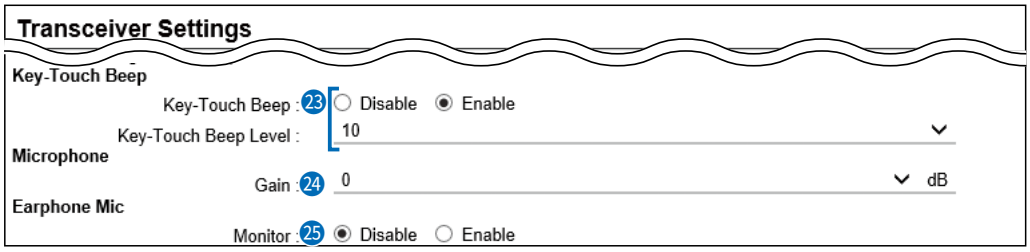

23 Key-Touch Beep..... Select whether or not the IP100H sounds the Key-Touch beep. (Default: Enable)
When “Disable” is selected, the IP100H does not sound the confirmation beep when a key is pushed.

- **Key-Touch Beep Level**
  Set the volume level of the notification beeps when the IP100H’s key is pushed. (Default: 10)
  The selectable range is between 0 and 32.
  ⓘ When “0” is selected in this setting, the IP100H does not sound any beep, even if the volume level is set.
  ⓘ When “Disable” is selected, this setting is grayed out and the volume level cannot be changed.

24 Gain ..... Adjust the microphone sensitivity. (Default: 0 (dB))
- Range: –12 (low) ~ 12 (high) dB, in 3 dB steps.

ⓘ When the noise level around the IP100H is high, set to low sensitivity and speak in a slightly louder voice that makes listening easier. Or when the noise level around the IP100H is quiet, set to high sensitivity and speak in smaller voice that makes listening easier.

25 Monitor ..... Select whether or not the IP100H with an earphone microphone uses the Monitor function. (Default: Disable)
When this setting is set to “Enable,” you can hear your transmit audio from the earphone. Set the monitor level to between 0 and 32. (Default: 10)

ⓘ When “0” is set, your voice is not heard from an earphone microphone, regardless of the audio setting in the IP100H.
ⓘ To prevent howling, set this setting to “Disable” when using a speaker microphone, such as the HM-186LS.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

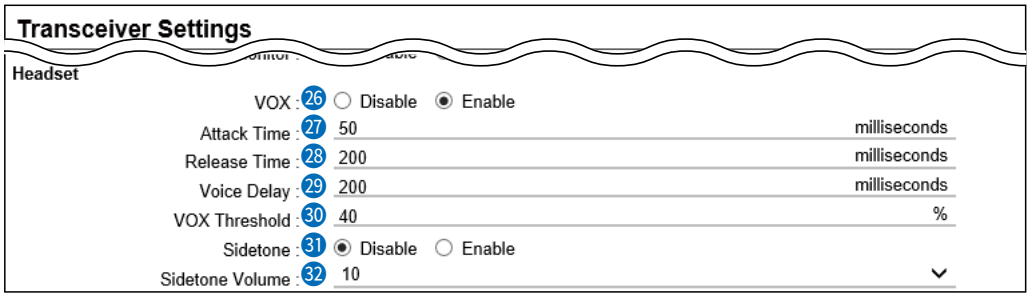

(This is an example of when the [VOX] (26) is set to “Enable.”)

26 VOX .....

Select whether or not the IP100H can use the VOX (voice operated transmission) function. (Default: Disable)
The transceiver has a VOX function, which allows hands-free operation.

ⓘ Information

- The VOX function requires an optional headset and connection cable, such as the HS-94, HS-95, or HS-97 headset and OPC-2006LS cable, or the HS-102 headset and OPC-2359 cable.
- The VOX function starts transmission when you speak into the microphone, without needing to push [PTT]; then, automatically returns to reception when you stop speaking.
- Be sure to turn OFF the IP100H’s power, before connecting or disconnecting optional equipment to or from the [🎤/🎧] jack.
- When “Enable” is selected, the [Attack Time] (27) through [Sidetone Volume] (32) is displayed.

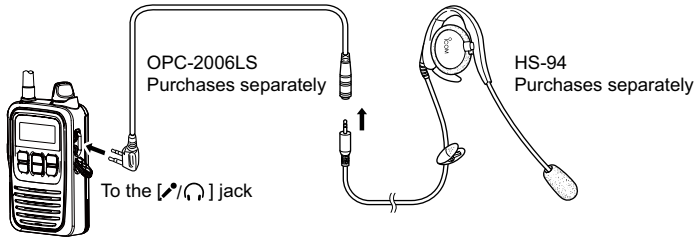

- The HS-85 has the VOX function, so if you connect the HS-85 to the IP100H through the OPC-2144, set the [VOX] (26) to “Disable.”

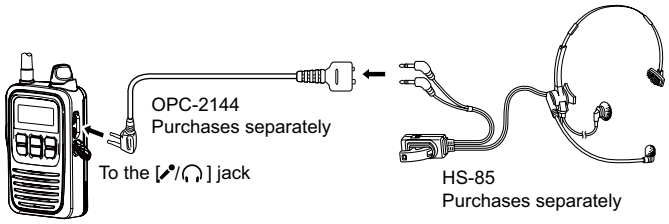

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

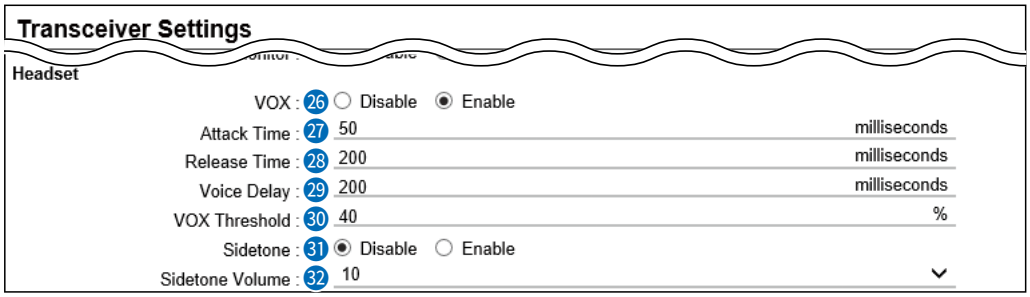

(This is an example of when the [VOX] (26) is set to “Enable.”)

27 Attack Time .....
VOX: Enable

Adjust the Attack time. (Default: 50)
• Range: 5 ~ 2000 (milliseconds) in 5 millisecond steps
When audio from a headset microphone is input for this specified time, the IP100H starts transmitting.

28 Release Time .....
VOX: Enable

Adjust the Release time. (Default: 200)
• Range: 5 ~ 2000 (milliseconds) in 5 millisecond steps
The release time is amount of time the transmitter stays ON after you stop speaking.

29 Voice Delay .....
VOX: Enable

Adjust the Voice Delay time to prevent clipping of the first few syllables after you begin speaking. (Default: 200)
• Range: 0 ~ 500 (milliseconds) in 5 millisecond steps

30 VOX Threshold .....
VOX: Enable

Adjust the VOX Threshold level. (Default: 40)
• Range: 0 ~ 100 (%)
ⓘ The lower values make the VOX function more sensitive to your voice.

31 Sidetone .....
VOX: Enable

Select whether or not to use the Sidetone function. (Default: Disable)
When “Enable” is selected, you can hear your voice from the headset.

32 Sidetone Volume .....
VOX: Enable

Adjust the Sidetone level. (Default: 10)
• Range: 0 (minimum) ~ 32 (maximum)

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

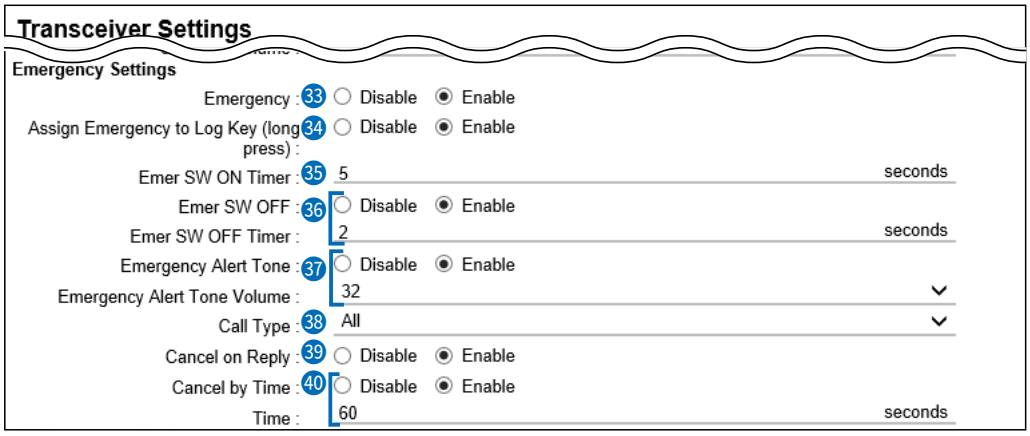

ⓘ (This is an example of when the Emergency (33), Emer SW OFF (36), and Cancel by Time (40) are set to "Enable.")

33 Emergency .....

Select whether or not to use the Emergency function. (Default: Disable)
Holding down the [Option Key] (20) or [Assign Emergency to Log Key (long press)] (34) until "Emergency" is displayed turns ON the Emergency function, and sends an Emergency call to the previously set User ID.
The Emergency call is canceled when an RX code is received, or holding down the [Option] key or [Log] key for a set period of time in the [Emer SW OFF Timer] (36).

- The period of time that the key must be held down to turn the Emergency function ON or OFF is set in the [Emer SW ON Timer] (35) or in the [Emer SW OFF Timer] (36).

34 Assign Emergency to Log Key (long press) .....

Emergency: Enable

Select whether or not to use the [☞] key to send an Emergency call. (Default: Enable)

35 Emer SW ON Timer .....

Emergency: Enable

Enter the period of time for which the [Option] key or [Log] key must be held down to turn the Emergency function ON. (Default: 5 seconds)

36 Emer SW OFF .....

Emergency: Enable

Select whether or not to cancel the Emergency call by pushing the [Option] key or [Log] key. (Default: Disable)
When "Enable" is selected, enter the period of time for which the [Option] or [Log] key must be held down to turn OFF the Emergency function, between 1 and 10 seconds. (Default: 2 seconds)

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

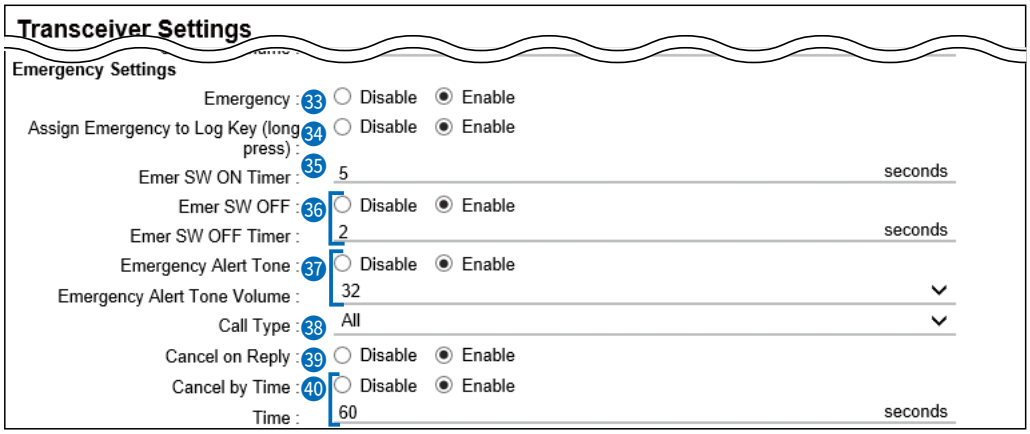

37 Emergency Alert Tone ……
Emergency: Enable

Select whether or not to sound an alarm when an Emergency call is sent. When this item is set to “Disable,” “Emergency” is not displayed on the screen, and IP100H sends the Emergency call. (Default: Enable)

When “Enable” is selected, set the [Emergency Alert Tone Volume] (audio level) of the alarm to between 0 and 32. (Default: 32)

38 Call Type ……
Emergency: Enable

Select the call type of Emergency call from Individual, Group, All, or Telephone. (Default: All)
If you select “Individual” or “Group,” enter the Destination ID between 00001 to 60000. If you select “Telephone,” enter a Destination Phone Number of up to 31 characters (0–9, #, and *).

39 Cancel on Reply……
Emergency: Enable

Select whether or not to cancel the Emergency call when any RX code is received. (Default: Enable)

40 Cancel by Time ……
Emergency: Enable

Select whether or not to cancel the Emergency call after the set period of time has passed. (Default: Disable)
If you select “Enable,” enter a period of time to between 1 and 255 seconds. (Default: 60 (seconds))

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

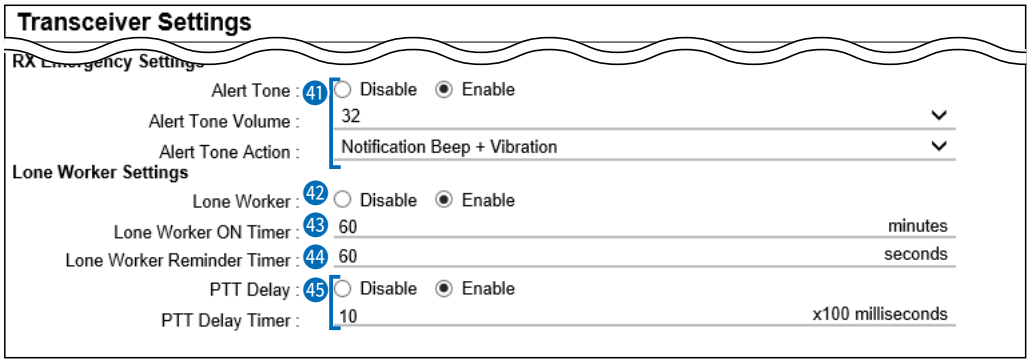

(This is an example of when the [Lone Worker] (42) is set to "Enable.")

41 Alert Tone.....
Emergency: Enable

Select whether or not to cancel an Emergency call after the set period of time has passed. (Default: Enable)
If you select "Enable," set the Volume (audio level) to between 0 and 32, and select the action. (Default: 32, Notification Beep+Vibration)

ⓘ In the [Alert Tone Action], select "Notification Beep," "Vibration," or "Notification Beep + Vibration" to activate when an Emergency call is received.

42 Lone Worker .....
Emergency: Enable

If the Lone Worker function is activated, the Emergency function is automatically turned ON after the set period of time has passed with no operation. (Default: Disable)

43 Lone Worker ON Timer.....
Lone Worker: Enable

Enter the period of time for starting the Lone Worker function. (Default: 60 (minutes))

• Range: 1 ~ 255 (minutes) in 1 minute steps

ⓘ When the IP100H is operated within the period of time in this item, the times for [Lone Worker ON Timer] (43) and [Lone Worker Reminder Timer] (44) are reset.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

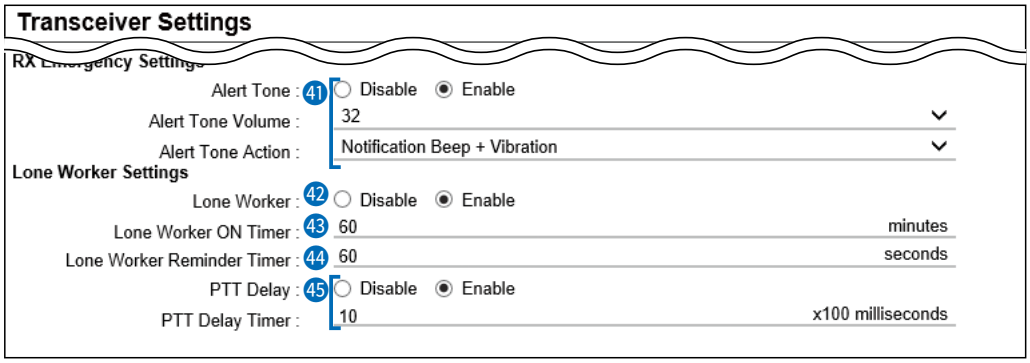

(This is an example of when the [Lone Worker] (42) is set to “Enable.”)

44 Lone Worker Reminder Timer
Lone Worker: Enable

Enter the period of time to start the Emergency call transmission after the period of time that is set in [Lone Worker ON Timer] (43) has passed. (Default: 60 (seconds))
When the transceiver is not operated after the period of time has passed, the Emergency call automatically starts.
- Range: 1 ~ 255 (seconds) in 1 second steps

ⓘ When the transceiver is operated by the [Emergency] function activation, [Lone Worker ON Timer] and [Lone Worker Reminder Timer] are reset.
ⓘ When the [Lone Worker Reminder Timer] is activated, beeps sound every 2 seconds until the timer is reset.

45 PTT Delay.....
Lone Worker: Enable

Enter the period of time for the delay time to transmit by pushing [PTT] while [Lone Worker On Timer] and [Lone Worker Reminder Timer] are activated. (Default: Enable, 10)
- Range: 1 ~ 255 (×100 milliseconds)

ⓘ If this item is set to a longer period of time, you can reset [Lone Worker On Timer] and [Lone Worker Reminder Timer] by momentary pushing [PTT] without transmitting.
ⓘ Hold down [PTT] for more than the set period of time in this item to transmit.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

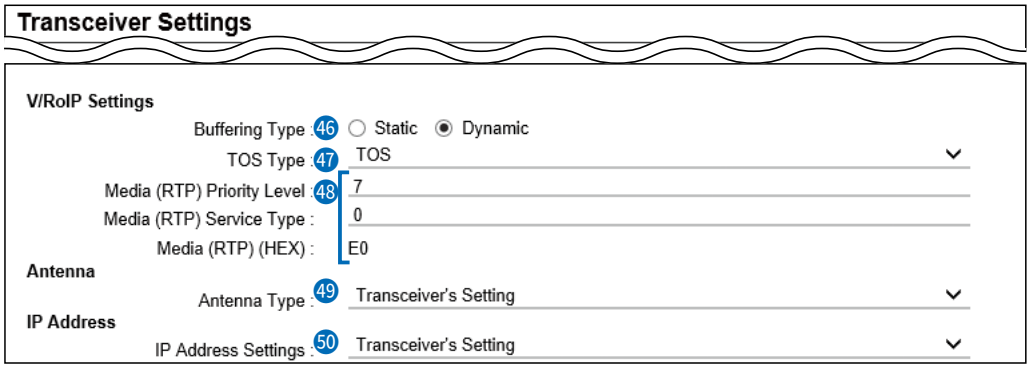

46 Buffering Type ..... Select the buffer type to control any interrupted sound.

(Default: Dynamic)

- **Static**
  The buffer time is set [Receive Buffer Size].
  Set the buffer time to between 20 and 500 milliseconds to keep the audio from breaking up. A shorter value improves the delay, but it may frequently break the audio signal.

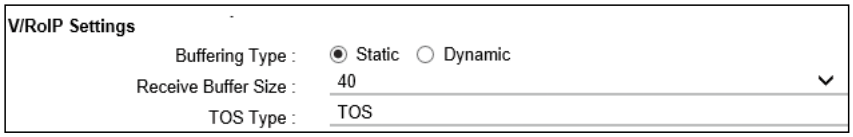

- **Dynamic**
  The buffer time changes according to the audio fluctuation.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

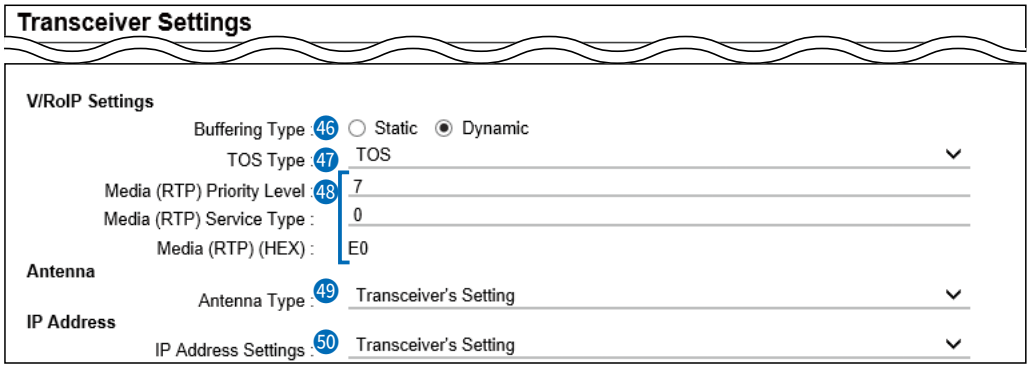

47 TOS Type ..... Select the TOS (Type-Of Service) format. (Default: TOS)

- **Not Used:** The TOS function is disabled.
- **TOS:** Sends the 8 bit VoIP packets to the TOS field in the IP header using the TOS format.
  Sets to between 1 (lowest) and 3 bits (Priority level) or 4 and 7 (highest) bits (Type of Service), based on the RFC1349. The 1 bit remaining is not used, and is fixed as 0.
- **Diffserv:** Sends the 8 bit VoIP packets to the TOS field in the IP header using the Diffserv (Differentiated Service) format.
  Sets to between 1 and 6 bits (DSCP). The 2 bits remaining are not used, and are fixed as 0.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

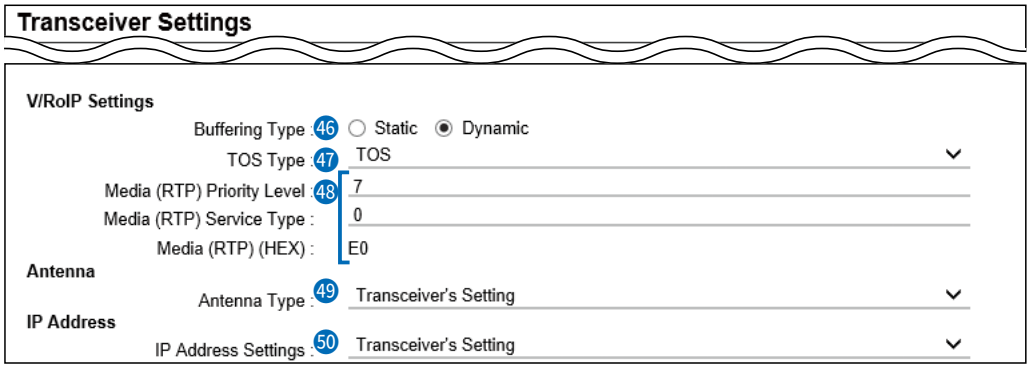

48 Media (RTP).....

Select the Priority level and Service type of the sent VoIP packets.
ⓘ The item is not displayed when [TOS Type] (47) is set to "Not Used."

- **Media (RTP) Priority Level**
  Set the TOS priority level to between 0 (lowest) and 7 (highest). (Default: 7)

- **Media (RTP) Service Type**
  Set the TOS service type code to between 0 and 15. (Default: 0)

- **Media (RTP) DSCP**
  Set the DSCP (Differentiated Services Code Point) code to between 0 and 63. (Default: 56)
  - This item is displayed when the [TOS Type] (47) is set to "Diffserv."

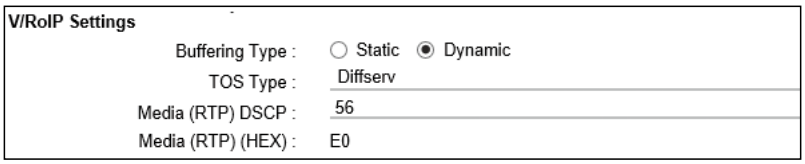

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

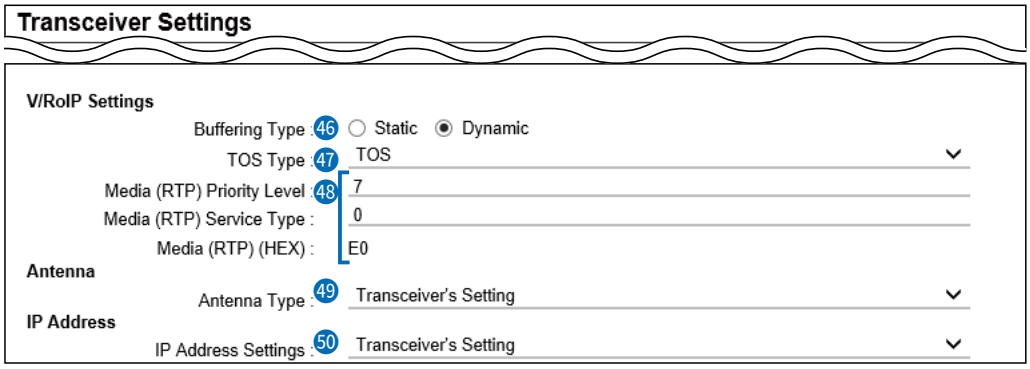

49 Antenna Type ..... Select the antenna that the IP100H will use.
(Default: Transceiver's Setting)

- **Transceiver's Setting**
  Uses the last antenna set by the CS-IP100H or the RoIP Gateway.

- **Internal Antenna**
  Uses the internal antenna when you want to:

  - Reduce the communication range.
  - Limit the communication area and improve security.
  - Reduce electrical interference among WLAN transceivers.
  - Control the communication speed in an environment where some access points are installed in a comparatively small area.

- **External Antenna**
  Uses the external antenna.
  The external antenna extends the communication range.

50 IP Address Settings ..... Select the IP100H's IP settings. (Default: Transceiver's Setting)

- **Transceiver's Setting**
  Uses the last IP setting set by the CS-IP100H or the RoIP Gateway.

- **DHCP Client**
  Selects the DHCP Client when the IP address is automatically obtained by a DHCP server.

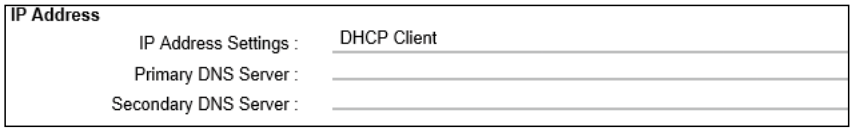

ⓘ If necessary, enter the [Primary DNS Server] or [Secondary DNS Server] settings.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

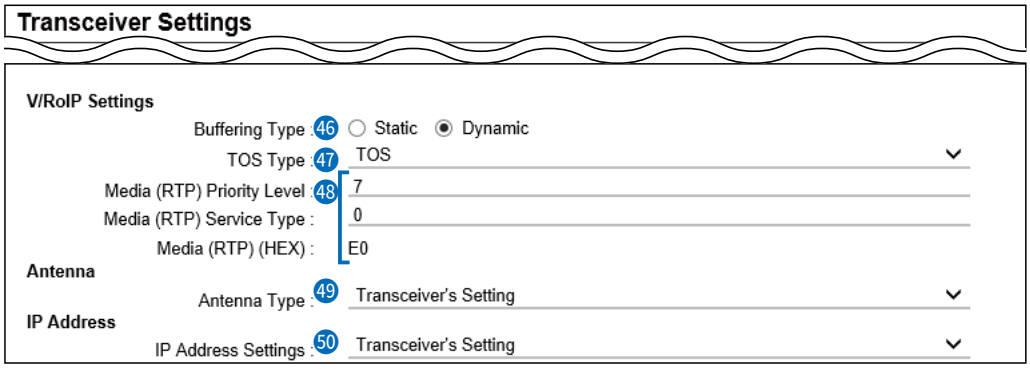

50 IP Address Settings ……

- **Static IP**
  Selects the Static IP address, if it is specified according to your network environment.

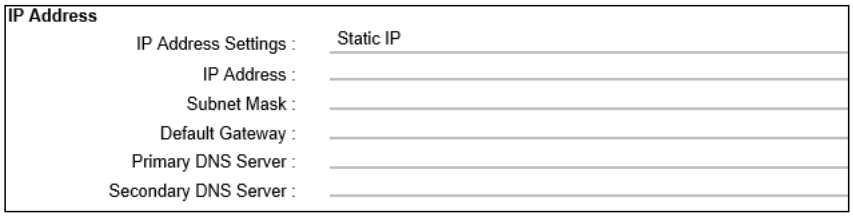

ⓘ Enter the default gateway address, if your network connects to a different network.
ⓘ If necessary, enter the [Primary DNS Server] or [Secondary DNS Server] settings.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

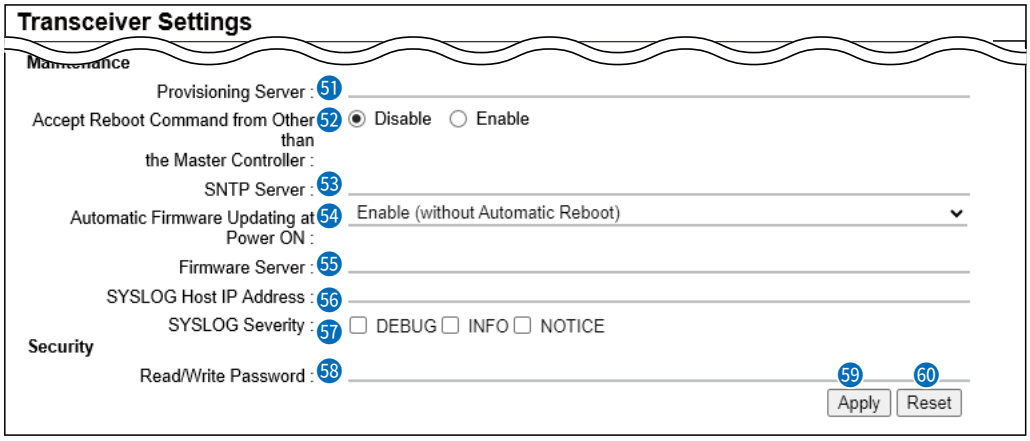

51 Provisioning Server ..... Enter an IP address or Host name of the Provisioning Server for the IP100H, of up to 63 characters.

ⓘ When the RoIP Gateway is used as its Provisioning Server, this entry is not necessary.

52 Accept Reboot Command from Other than the Master Controller Select whether or not the IP100Hs can be rebooted by the other than the specified Provisioning Server (51). (Default: Disable)

ⓘ The VE-PG4, IP1000C, and IP1100CV are compatible with this function. (As of April 2026)

53 SNTP Server ..... Enter the IP address of the device that is specified as the SNTP Server for the IP100H.

ⓘ When the RoIP Gateway is used as its SNTP Server, this entry is not necessary.

54 Automatic Firmware Updating at Power ON ..... Select whether or not the IP100H will use the Automatic Update function. (Default: Enable (without Automatic Reboot))

- **Disable**
  Disables the automatic firmware updating when the IP100H is turned ON.
- **Enable (without Automatic Reboot)**
  When this setting is set to “Enable (without Automatic Reboot),” the IP100H works as follows.
  1. The IP100H confirms the latest firmware in the RoIP Gateway when it is turned ON.
  2. The IP100H automatically downloads the firmware if it needs to be updated.
  3. The IP100H will be updated when it is turned ON again.
- **Enable (with Automatic Reboot)**
  When this setting is set to “Enable (with Automatic Reboot),” the IP100H works as follows.
  1. The IP100H confirms the latest firmware in the RoIP Gateway when it is turned ON.
  2. The IP100H automatically downloads the firmware if it needs to be updated.
  3. The IP100H is updated automatically, and then it is rebooted.

  ⓘ You can check the firmware version of the IP100H in the [TOP] menu.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP100H]

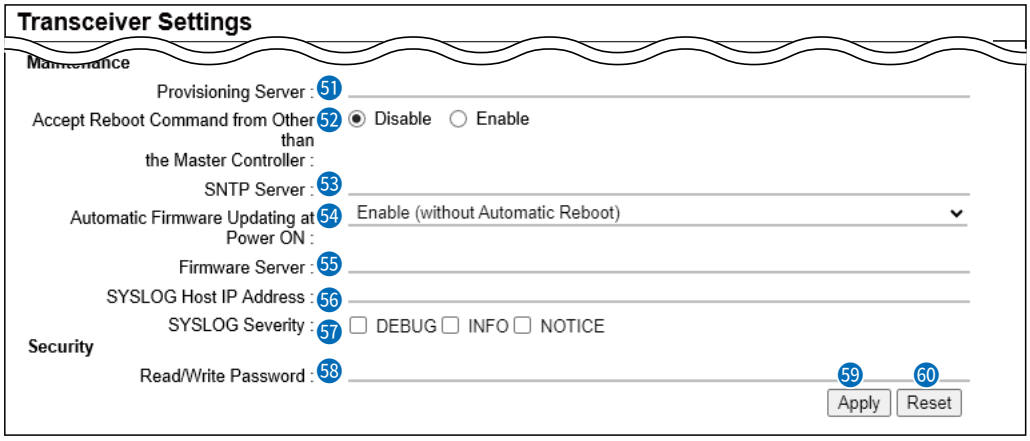

55 Firmware Server..... Enter an IP Address or Host name of the Firmware Server for the IP100H, of up to 63 characters.
ⓘ When the RoIP Gateway is used as its Firmware Server, this entry is not necessary.

56 SYSLOG Host IP Address Enter the SYSLOG host's address.
ⓘ The host device must have the SYSLOG server function.

57 SYSLOG Severity ..... Select the log information to send to the SYSLOG host. The SYSLOG host is sent to another host that is set in the [SYSLOG Host IP Address] (56). (Default: ☐ DEBUG ☐ INFO ☐ NOTICE)
ⓘ Enter a check mark to send the log entries.

58 Read/Write Password ..... Enter a password of up to 16 characters. The password is used when reading from, or writing to the IP100H, or updating the firmware using the CS-IP100H*.
* CS-IP100H is the cloning software for the IP100H, and can be downloaded from the Icom website.

59 <Apply> ..... Click to apply the entries.
ⓘ Some parts of the entries are displayed in [Transceiver Setting List], such as the Transceiver Model, Name, Unit ID, Use ID List, Area Call, Message, and Status.

60 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

Individually assign the functions, or set the receive notification tone to a registered IP110H.
ⓘ After the setting is completed, you must reboot the IP110H.

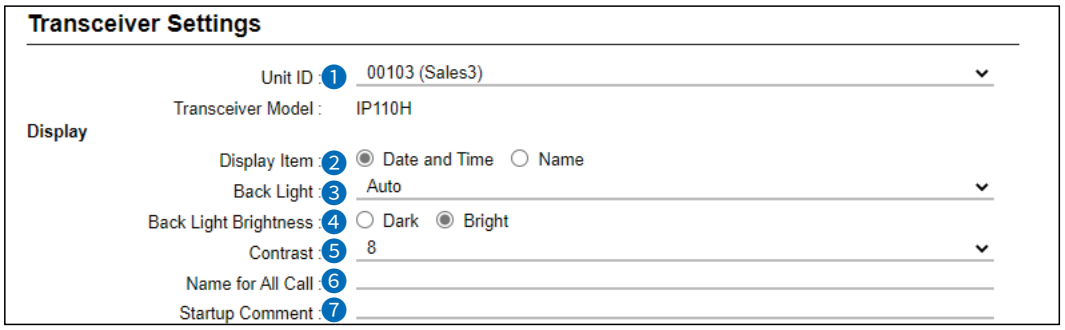

❶ Unit ID ..... Select the IP110H's Individual number (Name) that you want to edit.
ⓘ Only the individual numbers of the WLAN transceiver are selectable. The individual number that the [Transceiver Model] on the [Transceiver Registration] screen is set to "RC-FS20" or "IP100FS," cannot be selected.

❷ Display Item ..... Select whether or not the IP110H displays the Date and Time or its Name in the standby mode. (Default: Date and Time)
ⓘ If the [Name] on the [Transceiver Registration] screen has not been entered, and this setting is set to [Name], the IP110H displays the individual number.

❸ Back Light ..... Select the IP110H backlight function. (Default: Auto)

- **OFF**: The backlight does not light.
- **ON**: The backlight lights continuously.
- **Auto**: The backlight lights when an operation is performed, and goes out after 5 seconds.

❹ Back Light Brightness ..... Select the screen backlight brightness from Dark and Bright. (Default: Bright)

❺ Contrast ..... Set the screen contrast to between 1 (the lowest) and 16 (the highest). (Default: 8)

❻ Name for All Call ..... Enter a name for All call of up to 5 characters, if necessary.

❼ Startup Comment ..... Enter a comment of up to 8 characters. The comment is displayed when the IP110H boots up.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

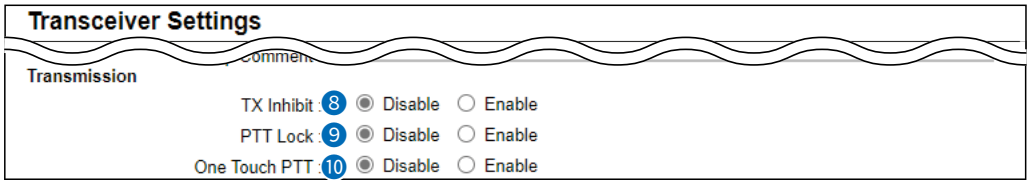

8 TX Inhibit ..... Select “Enable” to inhibit the IP110H’s transmission. (Default: Disable)

ⓘ When this setting is set to “Enable,” the IP110H also cannot transmit with an optional microphone, or using the VOX function.

9 PTT Lock ..... Select “Enable” to lock the IP110H’s PTT switch. (Default: Disable)

ⓘ When this setting is set to “Enable,” the IP110H cannot transmit by holding down its PTT switch, but it can transmit with an optional microphone or using the VOX function as well.

10 One Touch PTT ..... Select whether or not to enable the One Touch PTT function. (Default: Disable)

This function enables you to push [PTT] to transmit and push again to standby, so you can transmit without continuously holding down [PTT].

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

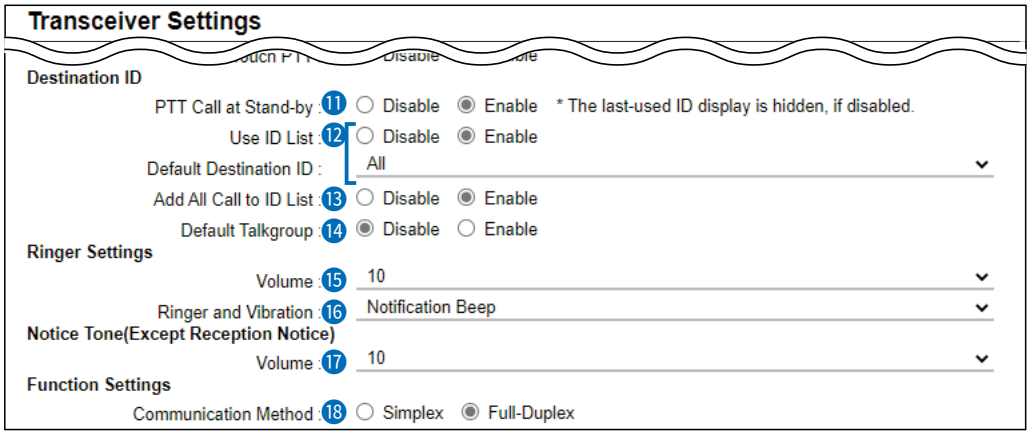

⓫ PTT Call at Stand-by ..... Select whether or not the IP110H displays the Destination ID (Call type) in the standby mode. (Default: Enable)

- **Disable:** The Destination ID (Call type) is not displayed in the standby mode.
  ⓘ The Destination ID (Call type) is displayed when you select the ID using the function keys.
- **Enable:** The Destination ID (Call type) is displayed in the standby mode.
  ⓘ When the PTT on the IP110H is pushed, the IP110H calls the displayed ID (Call type).

⓬ Use ID List ..... Select whether or not the IP110H uses the ID list. (Default: Disable)

- **Disable:**
  The call type is fixed to that which is selected in the [Call Type], as shown below, even if you push the [🕮 CLR] key on the IP110H.
  ⓘ If you set the Call Type to “Individual” or “Group,” enter a destination ID between 1 to 60000 in the [Destination ID]. (Default: All)
  ⓘ Even if “Disable” is selected, the IP110H displays a received ID in the ID list.



- **Enable:**
  The call type is changed by pushing the [🕮 CLR] key or selecting on the menu screen on the IP110H.
  Select Default Destination ID from All, or an ID number (1 to 500) that is displayed when the IP110H is turned ON, in [Call type].
  ⓘ The ID list is selected on the [Common Setting] screen.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

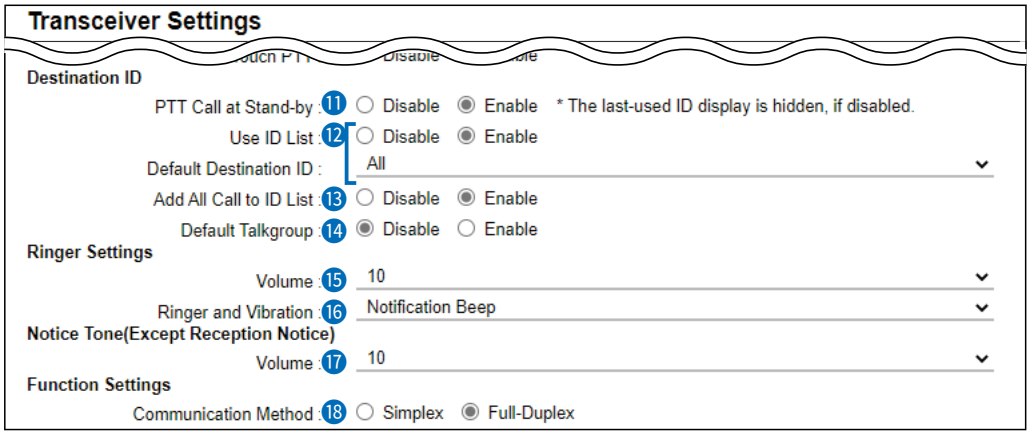

⓭ Add All Call to ID List …… Select whether or not to display All Call in the ID list of the IP110H. (Default: Enable)

- **Disable**
  Does not display “All” in the ID list.
  ⓘ When “Disable” is selected in [Add All Call to ID List], you cannot select an All call using the [🕮 CLR] key.

- **Enable**
  ⓘ When [Use ID List] (⓬) is set to “Enable,” set [Add All Call to ID List] and [Default Talkgroup].

⓮ Default Talkgroup …… Select a Talkgroup if you want to set the IP110H to join a Talkgroup when you turn ON the power. (Default: Disable)

- **Disable**
  The IP110H starts up without joining any Talkgroup. The ID that is set in the “Default Destination ID” in [Use ID List] (⓬) is displayed when the IP110H is turned ON.

- **Enable**
  The IP110H joins the selected Talkgroup when it is turned ON.
  ⓘ When [Use ID List] (⓬) is set to “Disable,” this item is not displayed.



Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

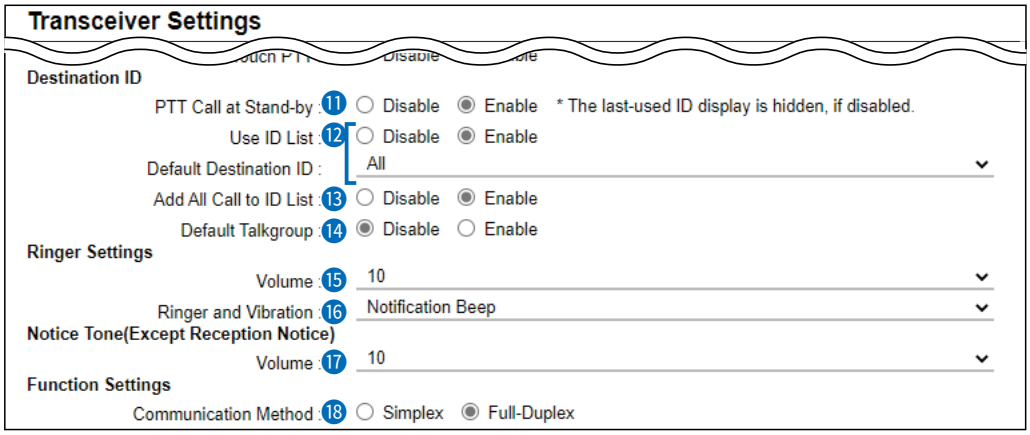

Ringer Settings

⓯ Volume ……

Set the beep level when the IP110H receives a Call or message to between 0 and 32. (Default: 10)

ⓘ When this setting set to “0,” the notification beep is turned OFF.

ⓘ The notification beep is individually set for the Call type or message in [Notification Tone] on the [Profile] screen in the [Common Settings] menu.

⓰ Ringer and Vibration……

Set the action when the IP110H receives a Call or message to “Notification Beep,” “Vibration” or “Notification Beep + Vibration.” (Default: Notification Beep)

- **Notification Beep**
  When the IP110H receives a Call or message, the specified Notification beep sounds, depending on the Call or message. The notification beep is set in [Notification Tone] on the [Profile] screen in the [Common Settings] menu.

- **Vibration**
  When the IP110H receives a Call or message, it vibrates for notification.

- **Notification Beep + Vibration**
  When the IP110H receives a Call or message, it vibrates and the Notification beep sounds for notification.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

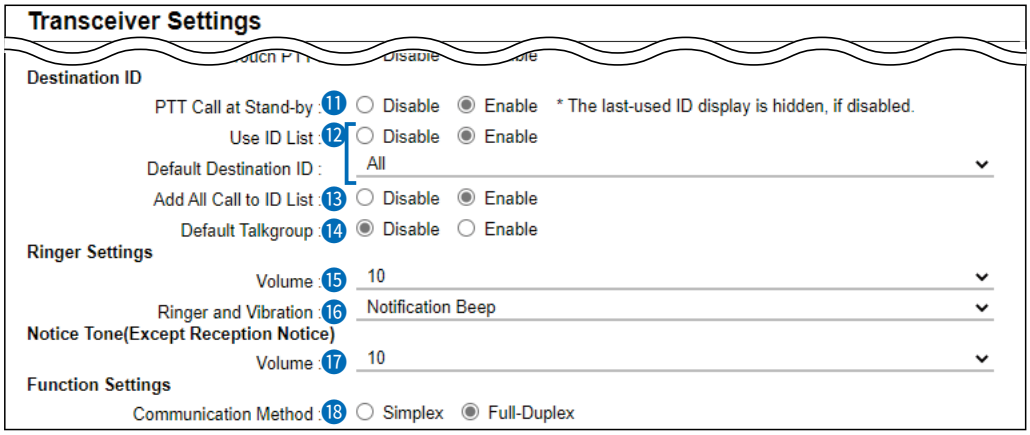

⑰ Volume (Except Reception Notice)

Set the beep level when the IP110H is transmitting a Call or connecting to the RoIP Gateway, to between 0 and 32. (Default: 10)

ⓘ When this setting is set to "0," the notification beep is turned OFF.

ⓘ Depending on the [Common Settings], the IP110H sounds a beep when the IP110H is transmitting or connecting to the RoIP Gateway.

⑱ Communication Method …

Select the communication method that the IP110H uses. (Default: Full-Duplex)

- **Simplex:** Toggles the transmission (Talker) and reception (Listener) for communication.
- **Full-Duplex:** Simultaneously transmits and receives, like a telephone.
  ⓘ With the Full-Duplex communication, you can transmit and receive like a telephone, even while the destination is transmitting.

Simplex and Full-Duplex

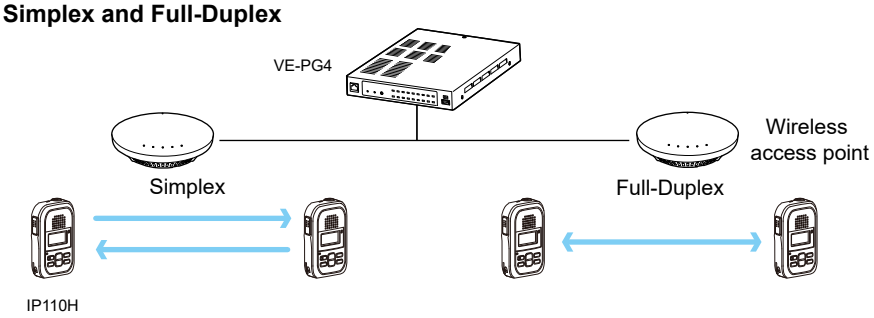

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

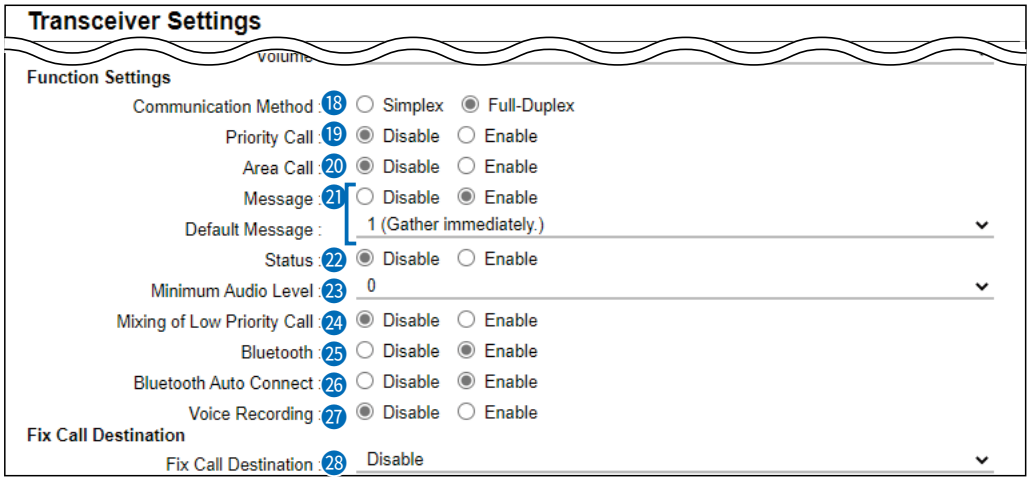

⑲ Priority Call ..... Select whether or not the IP110H uses Priority Call. (Default: Disable)
The priority levels of the Call types are in the following order.

Priority level	Priority	Call type	Priority Call	Remarks
High ↑	Fixed	Telephone	—	For telephone communication
		Emergency (High)	Enable	—
		Emergency (Normal)	Disable	—
	Selectable*	All Call (High)	Enable	Includes the Area Call or using an RC-FS20 or IP100FS
		Individual Call (High)	Enable	Includes using an RC-FS20 or IP100FS
		Group Call (High)	Enable	Includes the Area Call or using an RC-FS20 or IP100FS
		All Call (Normal)	Disable	Includes the Area Call
		Individual Call (Normal)	Disable	—
↓ Low		Group Call (Normal)	Disable	Includes the Area Call

* Selectable in the Call Type Priority on the [RoIP Server] screen in the [RoIP Server Settings] menu.

ⓘ Priority is given to the first call between calls with the same priority level.

ⓘ When a call is taken, priority is given to the setting of the caller.

Example:
Even while B and C are talking on a Group Call from A,
B can make an Individual Call (High) to C.
In this case, the Group Call is canceled.

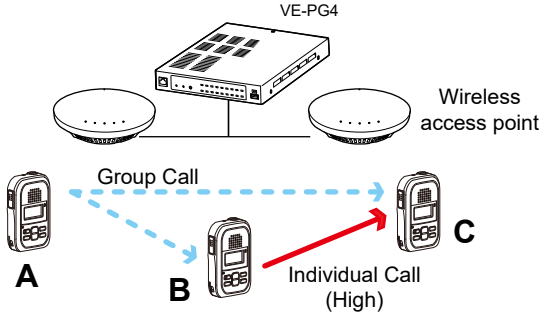

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

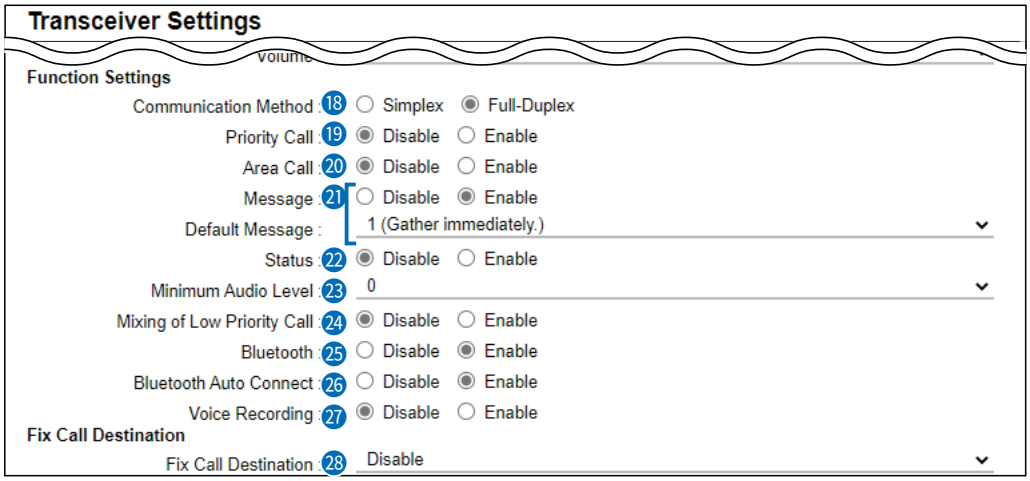

20 Area Call ..... Select whether or not the IP110H uses Area Call.

(Default: Disable)

When the IP110H calls All Call or Group Call using the Area Call function, it calls only other IP110Hs in the area that is connected to the same wireless access point.

When the BSSID that IP110H is connecting is registered in [Area Setting] (Transceiver Controller > RoIP Server Settings > Area Call), this function is activated.

Example:
IP110H makes an All Call with the Area Call function

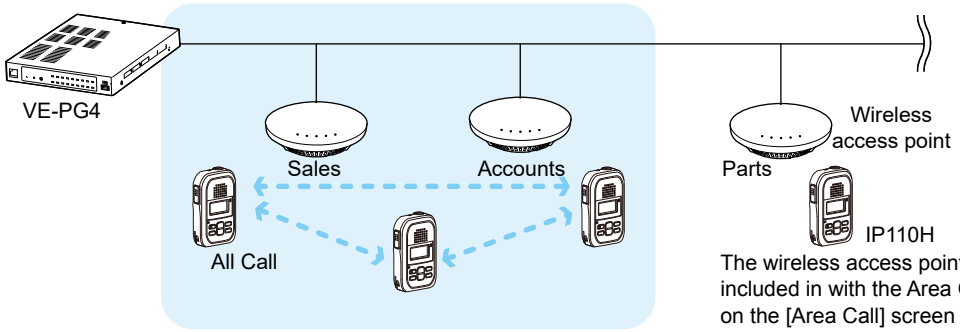

The wireless access points that the IP110H is included in with the Area Call function are set on the [Area Call] screen in the [RoIP Server Settings] menu.
(Example: For Sales and For Accounts)

IP100FS calls the All Call with the Area Call function

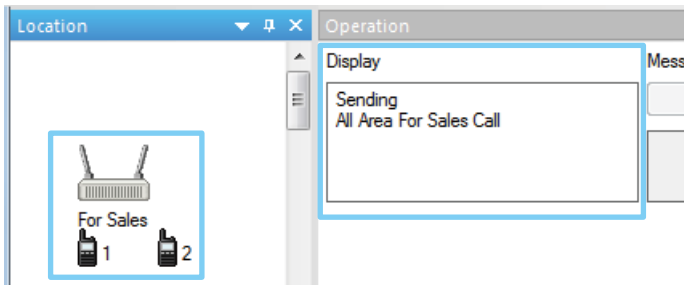

When the IP100FS uses the Area Call function, the IP100FS can call IP110Hs that are in the communication range of the access points assigned to the Area Call.
When the access point is selected in the [Location], the Call type (Individual, Group, All, Area, or Telephone) and names are displayed.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

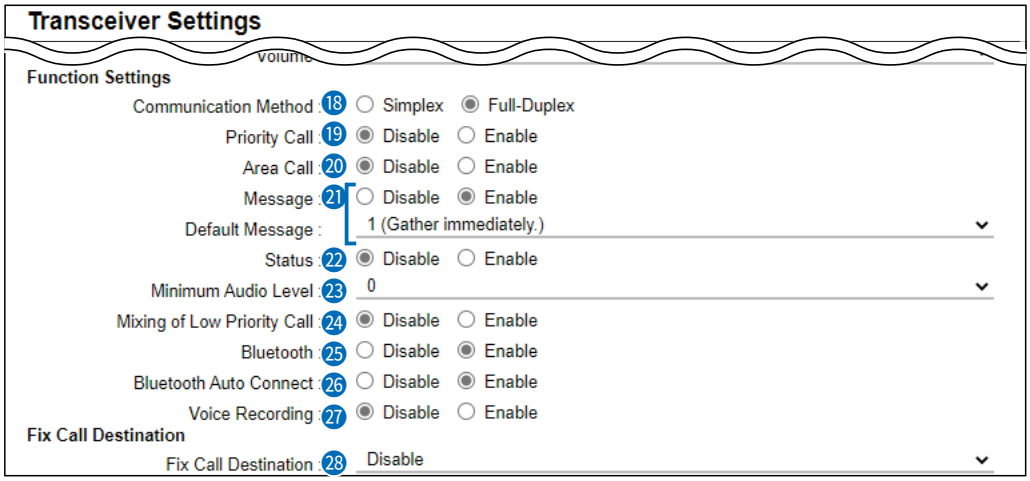

21 Message ..... Select whether or not the IP110H can send messages.
(Default: Disable)
When “Enable” is selected, you can select a message from the menu screen on the IP110H.

ⓘ Up to 10 messages of 32 characters or less can be programmed on the [Messages] screen in the [Common Settings] menu.

ⓘ Select the message number 1 to 10 in [Default Message] that is registered on the [Message] screen.

Example:

IP110H transmits a message

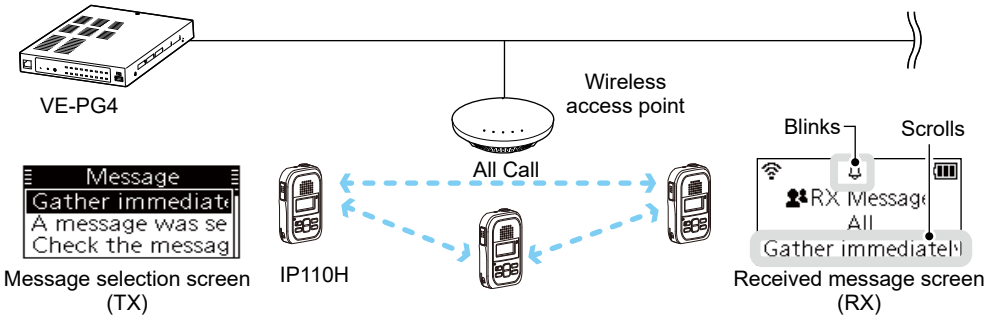

IP100FS transmits a message

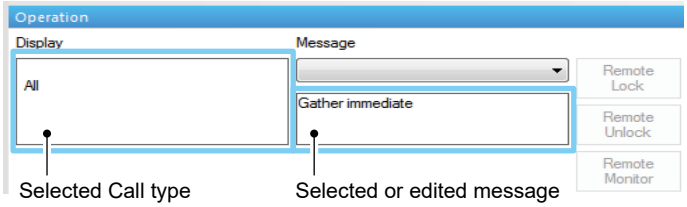

The IP100FS can store up to 100 messages in each site.
You can edit the stored messages.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

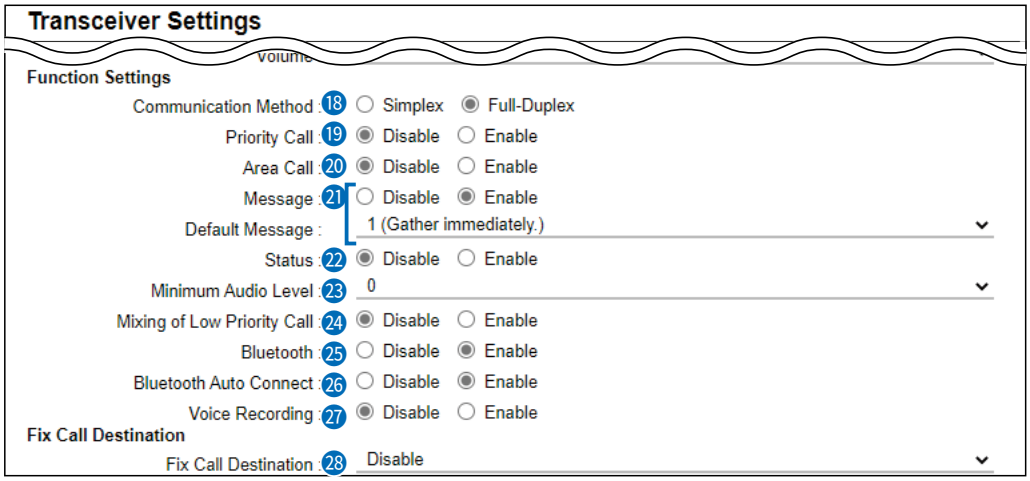

22 Status ..... Select whether or not the IP110H can send Status information. (Example: At lunch, Meeting, Waiting) (Default: Disable)
When “Enable” is selected, you can select a status from the menu screen on the IP110H.
Up to 10 statuses of 32 characters or less can be entered on the [Status] screen in the [Common Settings] menu.
ⓘ The status that the IP110H sends can be displayed on the [Transceiver Management] screen in the [Transceiver Settings] menu or the One-Touch button of the remote communicator.

Example:

IP110H sends the Status

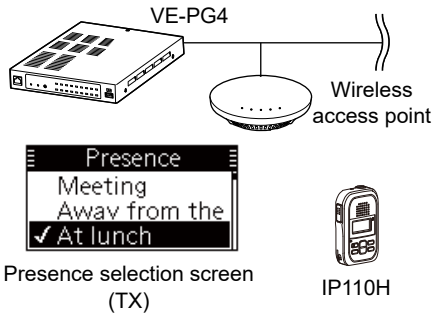

IP100FS One-Touch button

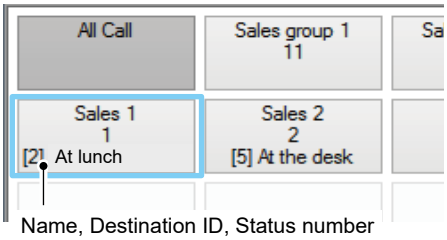

VE-PG4 Transceiver Management screen

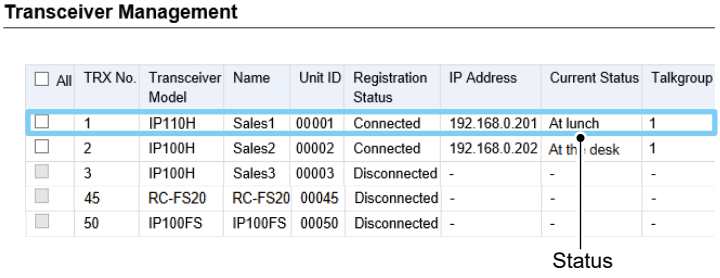

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

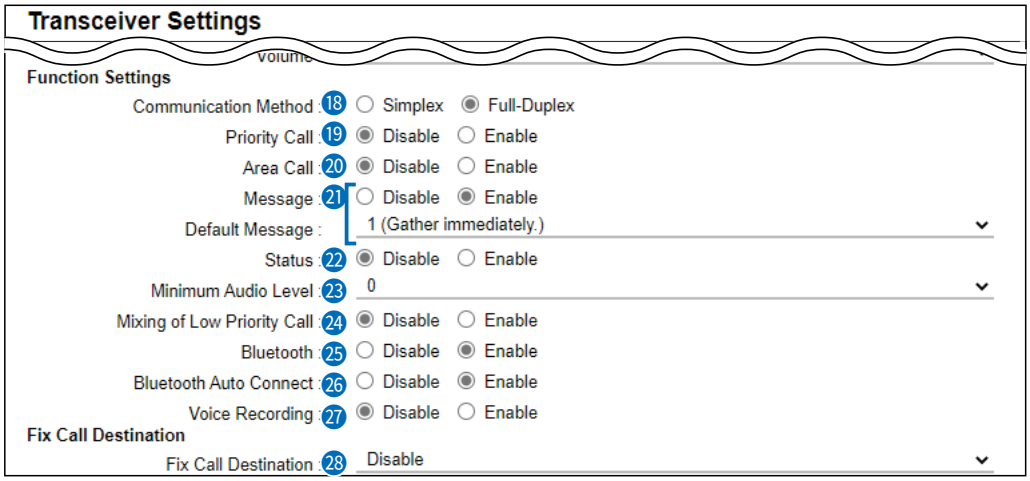

23 Minimum Audio Level …… Set the settable minimum audio level on the IP110H to between 0 and 32. (Default: 0)

24 Mixing of Low Priority Call Select whether or not the IP110H receives Mixed audio. (Default: Disable)

When this setting is set to “Enable,” the RoIP Gateway sends the mixed audio of all calls that call the IP110H.

ⓘ The IP110H displays the called station that has the highest priority in the mixed audio.
See page 6-62 for details of the Priority level.

• Mixing of Low Priority Call

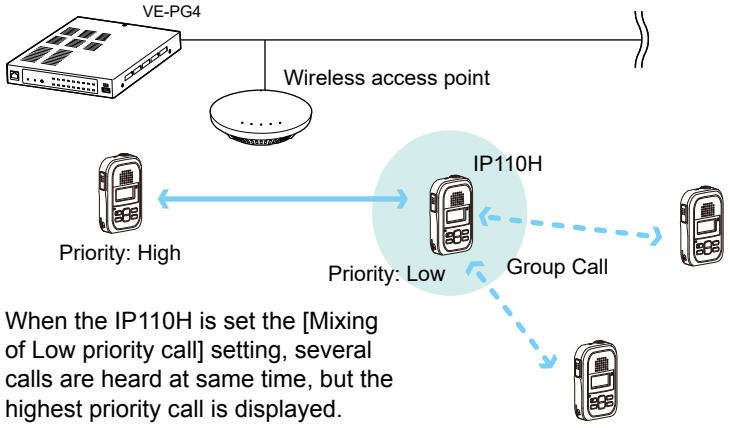

When the IP110H is set the [Mixing of Low priority call] setting, several calls are heard at same time, but the highest priority call is displayed.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

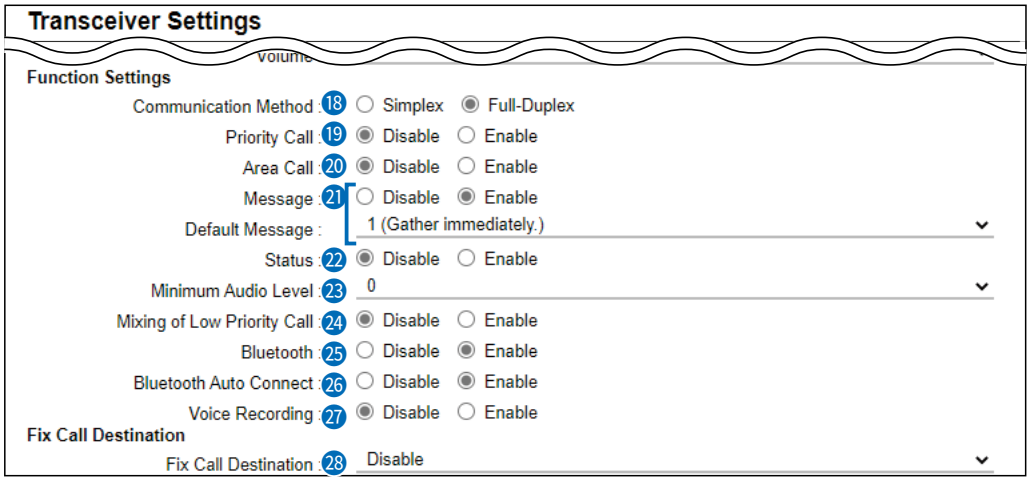

25 Bluetooth ..... Select whether or not to use the Bluetooth function. (Default: Disable)

26 Bluetooth Auto Connect ... If "Bluetooth" (25) is set to "Enable," select whether or not to use the automatic connection with the paired Bluetooth devices.
(Default: Enable)

27 Voice Recording..... Select whether or not to record the transmitted and received audio.
(Default: Disable)
If enabled, you can turn the recording function ON or OFF from the menu screen on the IP110H.
Set also the type of call to be recorded, only Individual calls or All calls.

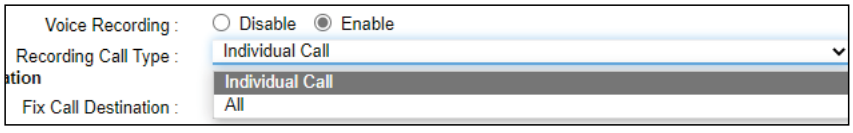

ⓘ The maximum record time is 4 minutes, and up to 10 files can be saved.
ⓘ For Full-Duplex calls, only the received audio is recorded.
ⓘ You cannot download the audio data from the transceiver.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

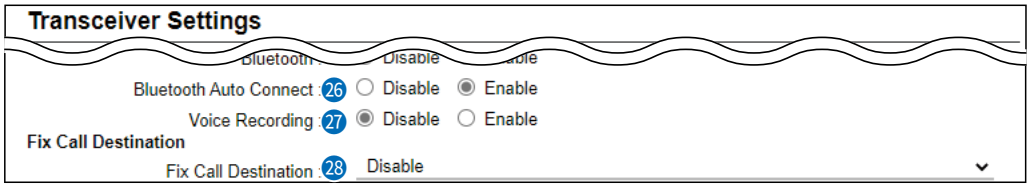

28 Fix Call Destination ..... Select whether or not the IP110H uses the Fix Call Destination function. (Default: Disable)

When this setting is set to other than “Disable,” the IP110H calls the preset destination instead of the selected destination that is displayed on the third line. The Fix Call Destination function separates the fixed call from the general calls by the specified method to start transmission.

- **Disable**
  The Fix Call Destination is not specified, and the IP110H calls the selected destination.

- **PTT**
  The Fix Call Destination is specified as PTT transmission.
  When [PTT] is held down, the IP110H calls the preset destination.



(Example: All call is specified to the PTT)

- **Earphone Mic or Headset**
  The Fix Call Destination is specified as the external Mic transmission.
  When the external microphone’s PTT switch is held down, or its VOX function is active, the IP110H calls the preset destination.

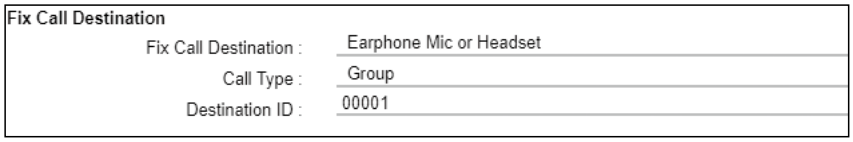

(Example: Group call is specified to the Earphone Mic or Headset)

ⓘ Information

- Set the Call type to “Individual,” “Group,” or “All.”
- When the “Call Type” is set to “Individual” or “Group,” enter the Individual ID or Group ID between 00001 to 60000 in the [Destination ID].
- The Destination ID, Name (if [Name] is selected in the [Display Item] (2)) or Call type of the Fix Call Destination is always displayed on the above of the Default call destination.
- When both of the IP110H’s [PTT] and the PTT switch of an external microphone such as an optional microphone or a Bluetooth headset are held down, the external PTT has priority and the internal microphone will be muted.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

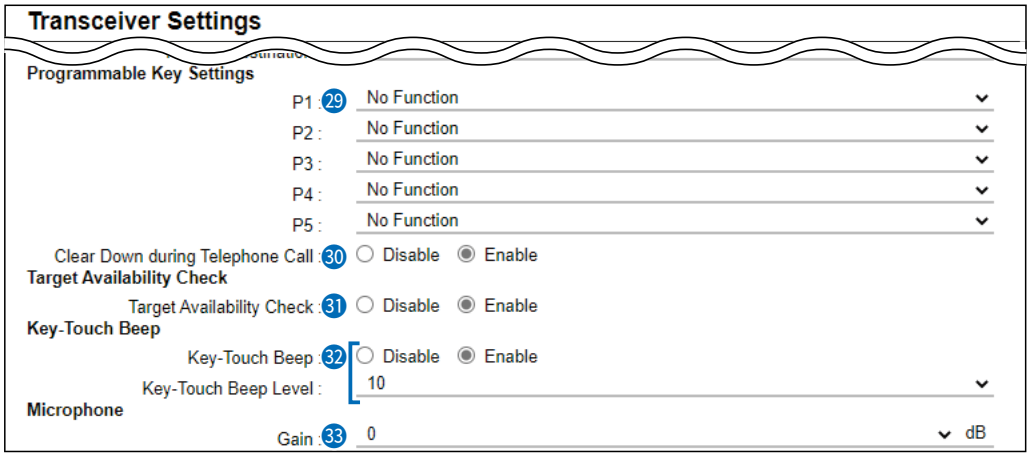

29 [P1] ~ [P5] .....

Assign “Message,” “One Touch,” “Clear Down,” “Mute,” “Emergency,” “Playback Recording,” “Temporary Audio Level,” or “No Function” to a IP110H’s Programmable key ([P1] to [P5]).

ⓘ When this setting is set to “No Function,” nothing changes by holding down the programmable key in the standby mode.

IP110H



VS-3



- **Message**

  Holding the programmable key for 1 second displays the Message selection screen.

  ⓘ Select the message number 1 to 10 in the “Message No.” item that registered on the [Message] screen.



- **One Touch**

  Holding the programmable key for 1 second selects a specified Call type and destination ID or phone number.

  Specify the “Individual,” “Group,” “All,” or “Telephone” Call type.

  ⓘ When “Individual” or “Group” is selected, enter the Individual ID (00001 ~ 60000) or Group ID (00001 ~ 60000) in the “Destination ID” item.

  ⓘ When “Telephone” is selected, enter up to 31 numbers and symbols (#, ∗) in the “Destination Phone Number” item.

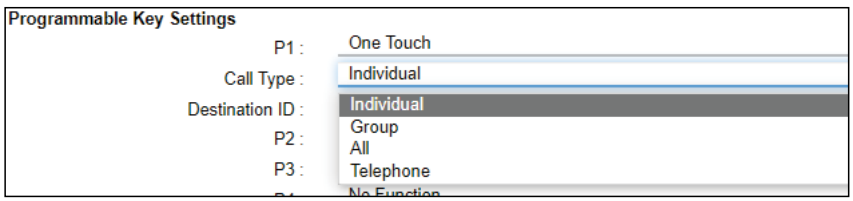

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

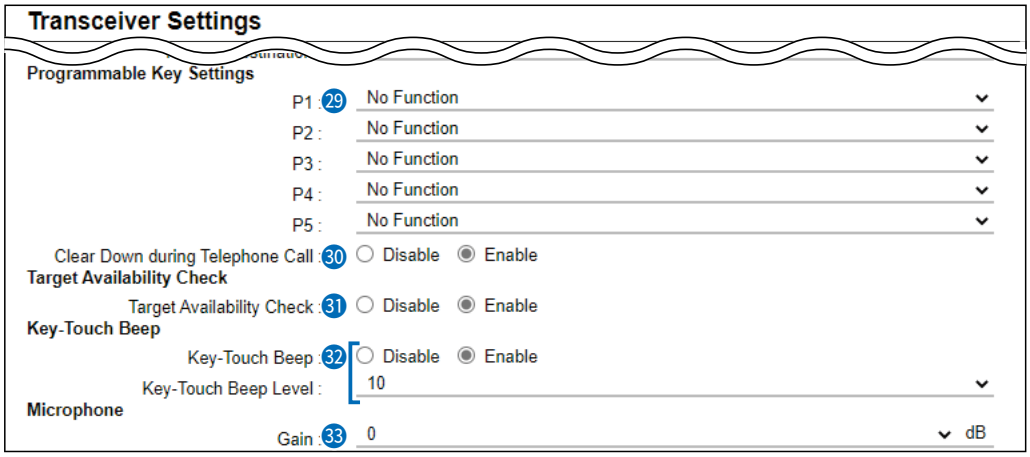

29 [P1] ~ [P5] .....

IP110H



VS-3



- **Clear Down**
  Holding the programmable key for 1 second terminates the phone call with an IP phone.
  ⓘ You can assign another function, if you select “Enable” on the [Clear Down during Telephone Call] (p. 6-73) item.



- **Mute**
  Hold down the programmable key for 1 second when you want to mute the received audio. (The Notification beep cannot be muted.)
  Hold down a programmable key for 1 second to turn the mute function ON or OFF.
  ⓘ You can turn OFF the mute function by pushing [PTT]. However, if you select “Enable” in the [Clear Down during Telephone Call] (p. 6-73) item, terminates the phone call in the phone call.
  ⓘ If you select “Enable” in the [Mute Automatic Release] item, turn OFF the mute function after specified time period has passed. (Default: Disable)
  If you select “Enable,” set the time period to release the mute function to between 10 to 600 (seconds). (Default: 60 (seconds))

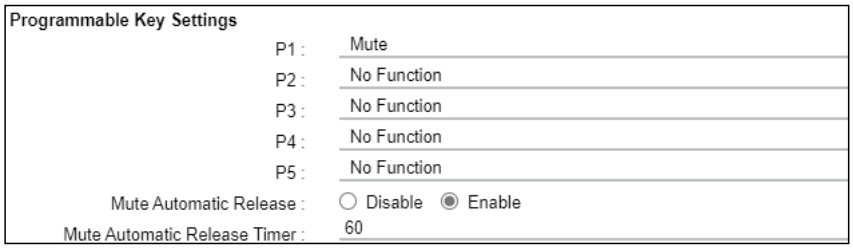

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

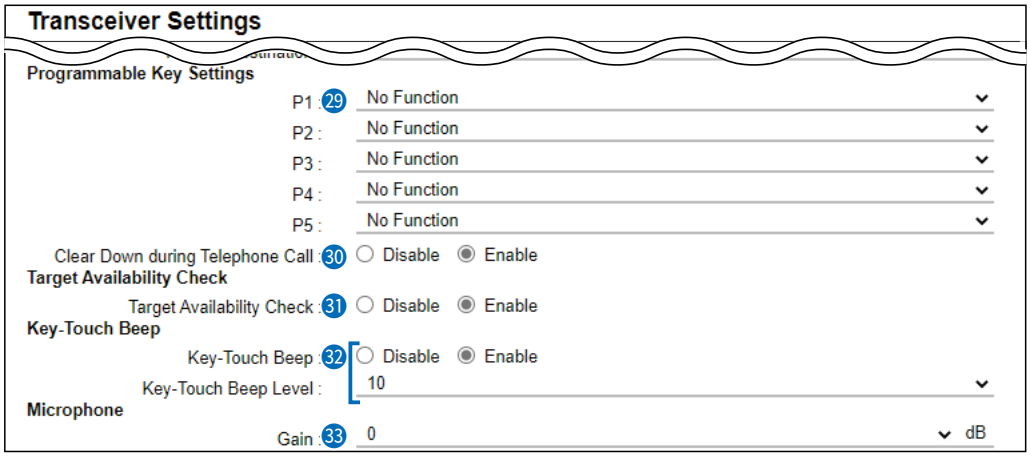

29 [P1] ~ [P5] .....

IP110H



VS-3



- **Emergency**
  Hold down the programmable key until “Emergency” is displayed to send an emergency call.
  When the emergency call is sent, an alarm sounds. The emergency call is canceled and the alarm stops when the transceiver receives a response or the programmable key of the transceiver is held down.
  ⓘ The time of period for which the key must be held down to turn the emergency function ON or OFF is set in the [Emer SW ON Timer] item or [Emer SW OFF Timer] item (p. 6-81).

NOTE:
The RoIP Gateway should not be used when high reliability is necessary.
The communication cannot be made, depending on the environment around the RoIP Gateway, such as the consumption of a battery, the signal environment, or the access point or network status.
Use the [Emergency] and [Lone Worker] functions as a supplementary function.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

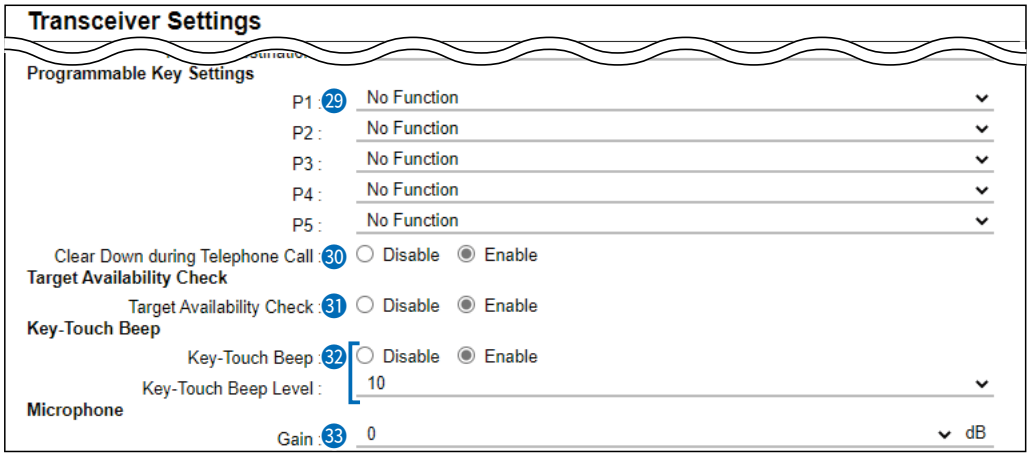

29 [P1] ~ [P5] .....

IP110H



VS-3



- **Playback Recording**
  Holding down the programmable key for 1 second displays the recorded log screen. Select and push [ENT] on the IP110H to start playing back the recorded audio.

- **Temporary Audio Level**
  Holding down the programmable key for 1 second increases or decreases the Audio output volume, based on the current volume on the IP110H.
  Select the increasing or decreasing level to between “–32” and “+32” or “0” (disabled).



Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

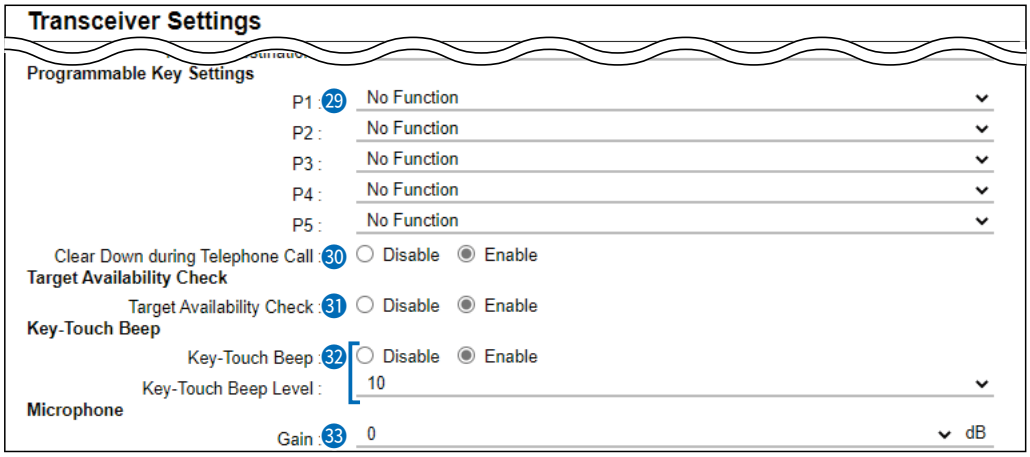

30 Clear Down during Telephone Call

IP110H



VS-3



Select “Enable,” if you want to terminate a phone call by pushing the IP110H’s programmable key. (Default: Enable)

ⓘ When the programmable key is set to “Clear Down,” this item will not be displayed.

ⓘ Before the target telephone is picked up, or during phone call, pushing the programmable key terminates the phone call.

ⓘ The IP110H can terminate the phone call only when a telephone calls the IP110H individually, or when the IP110H calls a telephone.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

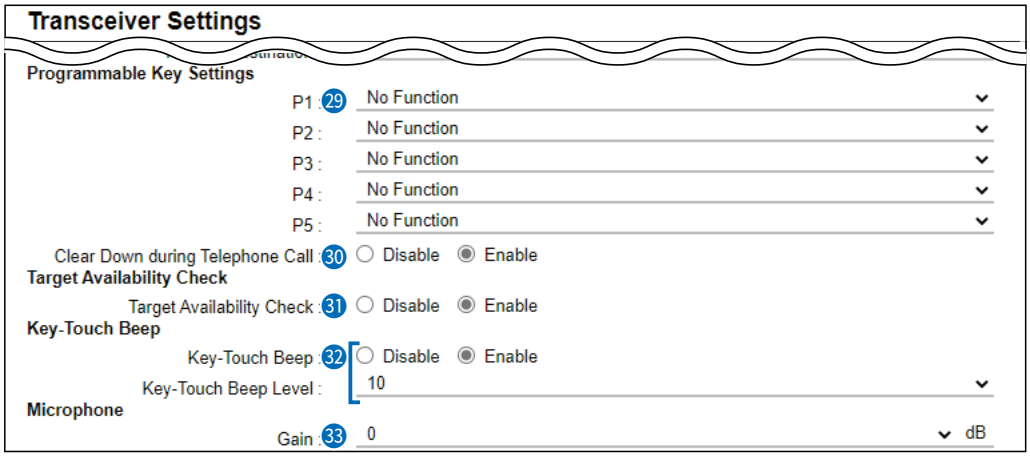

31 Target Availability Check… Select whether or not the IP110H displays a confirmation after it makes an Individual Call. (Default: Enable)
When “Enable” is selected, the IP110H displays the “Connected,” “Busy,” or “No response” connection status.
ⓘ When the target station is out of range, “No response” is displayed.
ⓘ If the [Connection Notice Tone] is set to “Enable,” the Success Tone or Failure Tone sounds to notify its connection status.
(Transceiver Controller > Common Settings > Profile > Profile > Connection Notice Tone)

32 Key-Touch Beep…… Select whether or not the IP110H sounds the Key-Touch beep. (Default: Enable)
When “Disable” is selected, the IP110H does not sound the confirmation beep when a key is pushed.

- **Key-Touch Beep Level**
  Set the volume level of the notification beeps when the IP110H’s key is pushed. (Default: 10)
  The selectable range is between 0 and 32.
  ⓘ When “0” is selected in this setting, the IP110H does not sound any beep, even if the volume level is set.
  ⓘ When “Disable” is selected, this setting is grayed out and the volume level cannot be changed.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

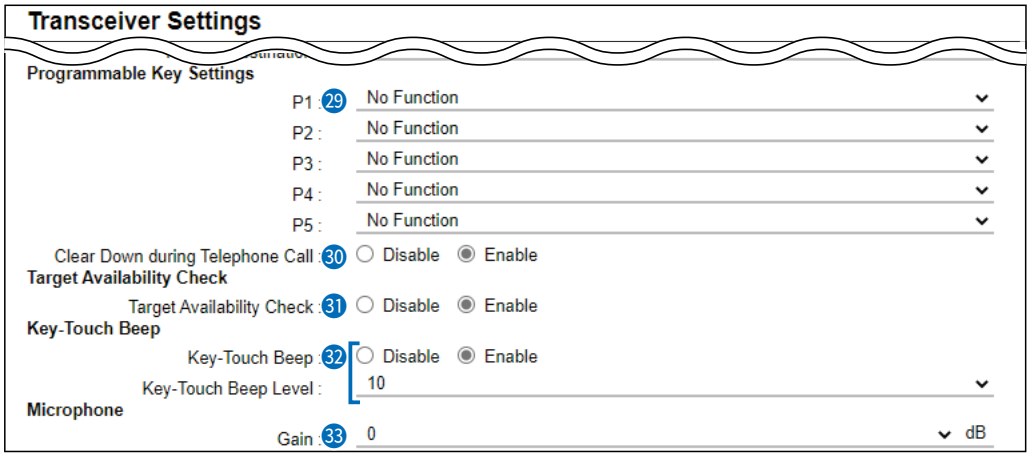

33 Gain ..... Adjust the microphone sensitivity. (Default: 0 (dB))

- Range: –12 (low) ~ 12 (high) dB, in 3 dB steps.

ⓘ When the noise level around the IP110H is high, set to low sensitivity and speak in a slightly louder voice that makes listening easier. Or when the noise level around the IP110H is quiet, set to high sensitivity and speak in smaller voice that makes listening easier.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

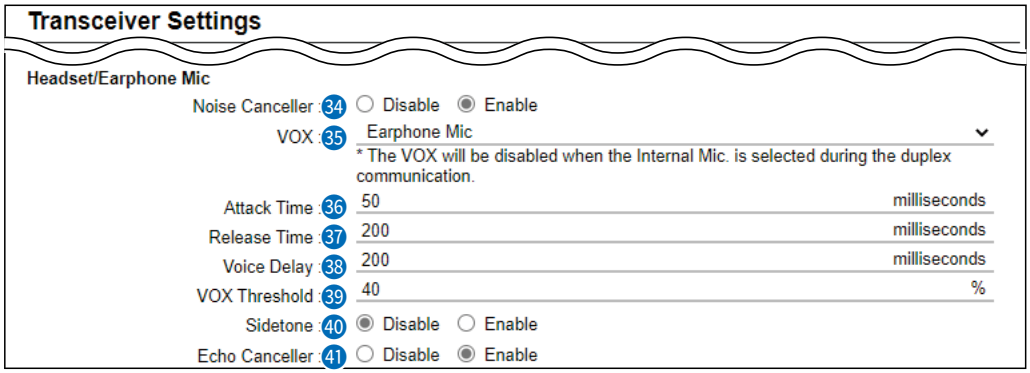

34 Noise Canceller .....

Select whether or not to use the noise canceller function. The function reduces the environmental noise and the destination can hear your voice clearer.
This setting commonly affects the internal microphone, earphone microphone, and headset. (Default: Enable)

35 VOX .....

Select whether or not the IP110H can use the VOX (voice operated transmission) function. (Default: Disable)
The transceiver has a VOX function, which allows hands-free operation.

ⓘ Turn OFF the IP110H before connecting and disconnecting the earphone microphone or headset.
ⓘ When you select other than “Disable,” the setting items from “Attack Time” to “VOX Threshold” are displayed.
ⓘ The VOX function is not usable when you select “Internal Mic” for the transceiver that is set to the Full-Duplex communication.

36 Attack Time .....

VOX: Enable

Adjust the Attack time. (Default: 50)
• Range: 5 ~ 2000 (milliseconds) in 5 millisecond steps
When audio from a headset microphone is input for this specified time, the IP110H starts transmitting.

37 Release Time .....

VOX: Enable

Adjust the Release time. (Default: 200)
• Range: 5 ~ 2000 (milliseconds) in 5 millisecond steps
The release time is amount of time the transmitter stays ON after you stop speaking.

38 Voice Delay .....

VOX: Enable

Adjust the Voice Delay time to prevent clipping of the first few syllables after you begin speaking. (Default: 200)
• Range: 0 ~ 500 (milliseconds) in 5 millisecond steps

39 VOX Threshold .....

VOX: Enable

Adjust the VOX Threshold level. (Default: 40)
• Range: 0 ~ 100 (%)
ⓘ The lower values make the VOX function more sensitive to your voice.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

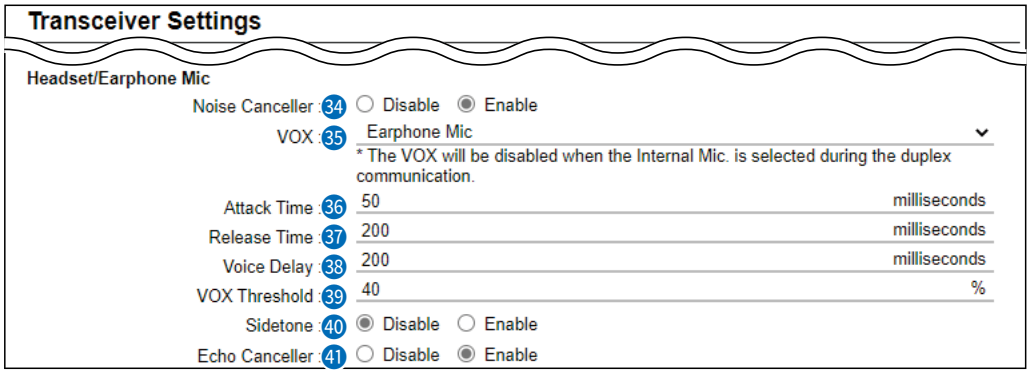

40 Sidetone ..... Select whether or not to use the Sidetone function. (Default: Disable)
When "Enable" is selected, you can hear your voice from the headset.
If enabled, adjust the Sidetone level to between 0 (minimum) and 32 (maximum). (Default: 10)



ⓘ The Sidetone function and Echo Canceller function cannot be used together.

41 Echo Canceller ..... Select whether or not to enable the echo canceller function. The function reduces caused during duplex communication.
(Default: Enable)

ⓘ The Sidetone function and echo canceller function cannot be used together.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

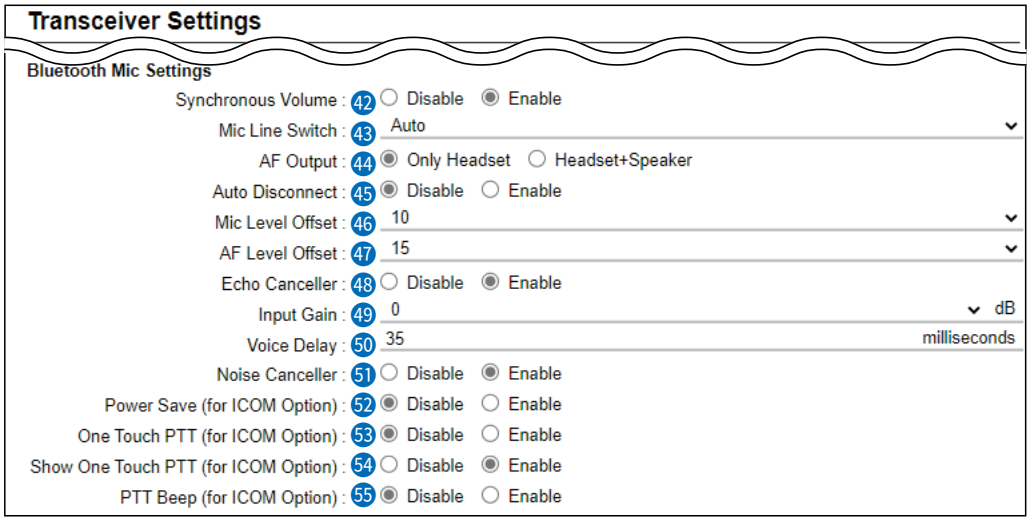

42 Synchronous Volume ..... Select whether or not to synchronize the audio volume level of the Bluetooth headset with the setting of IP110H. (Default: Enable)
When this function is enabled, you can adjust the headset audio volume on the IP110H.

43 Mic Line Switch ..... Select which microphone to use while the Bluetooth headset is connected. (Default: Auto)

- **Auto:**
  Transmits the audio from the device whose [PTT] is pushed.

- **Radio Mic:**
  When pushing the Bluetooth headset's [PTT], the IP110H transmits the audio from the optional microphone, if connected, or the transceiver's microphone if no optional microphone is connected.
  ⓘ No audio may be transmitted, depending on the type of connected microphone and the transceiver settings.
  ⓘ When pushing [PTT] on other than the Bluetooth headset, transmits the audio from the device whose [PTT] is pushed.

- **Bluetooth Mic:**
  Transmits the audio from the Bluetooth headset's microphone, no matter which [PTT] is pushed.

44 AF Output ..... Set the audio output device while using the Bluetooth headset. (Default: Only Headset)

- **Only Headset:**
  Outputs the audio only to the Bluetooth device.

- **Headset+Speaker:**
  Outputs the audio to both the IP110H and the Bluetooth device.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

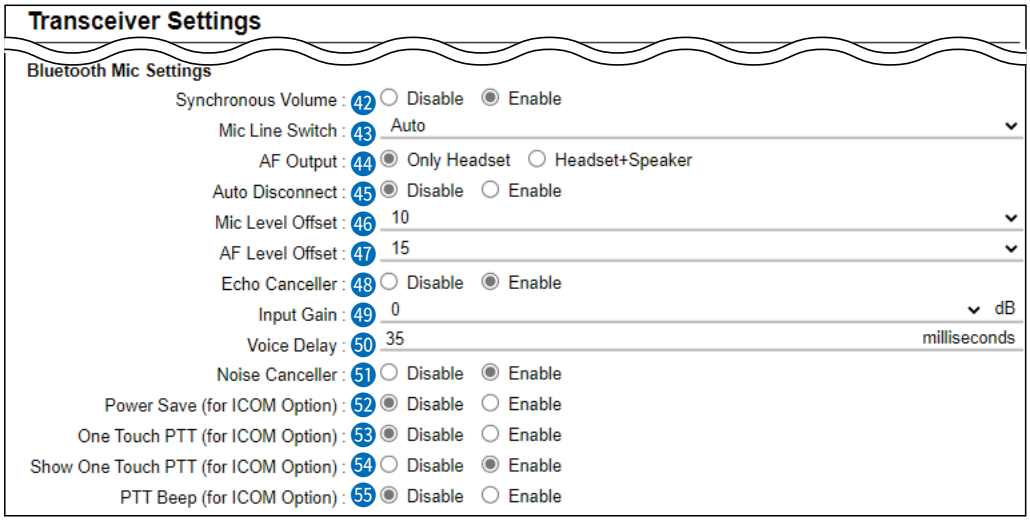

45 Auto Disconnect ..... Select whether or not to terminate the SCO (Synchronous Connection-Oriented) with the Bluetooth headset. (Default: Disable)
If enabled, the IP110H automatically disconnects the SCO link to the headset when the set period time has passed without voice input or output from the headset.

46 Mic Level Offset ..... Adjust the microphone level of a Bluetooth device to between 0 and 20 if the sensitivity of the device is extremely higher or lower than the transceiver or external microphone. (Default: 10)

47 AF Level Offset ..... Adjust the audio output level of a Bluetooth device to between 0 and 22 if the output from the device is extremely higher or lower than the transceiver or external speaker. (Default: 15)

48 Echo Canceller ..... Select whether or not to enable the echo canceller function. The function reduces caused during duplex communication.
(Default: Enable)

49 Input Gain ..... Set the signal echo canceller input gain when using a Bluetooth device to between –40 and 40 (dB). (Default: 0 (dB))

50 Voice Delay ..... Adjust the Voice Delay time when using a Bluetooth device to prevent clipping of the first few syllables after you begin speaking.
(Default: 35 (milliseconds))
The adjustable range is between 0 and 160 milliseconds.

51 Noise Canceller ..... Select whether or not to use the noise canceller function when using a Bluetooth device. The function reduces the environmental noise and the destination can hear your voice clearer. (Default: Enable)

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

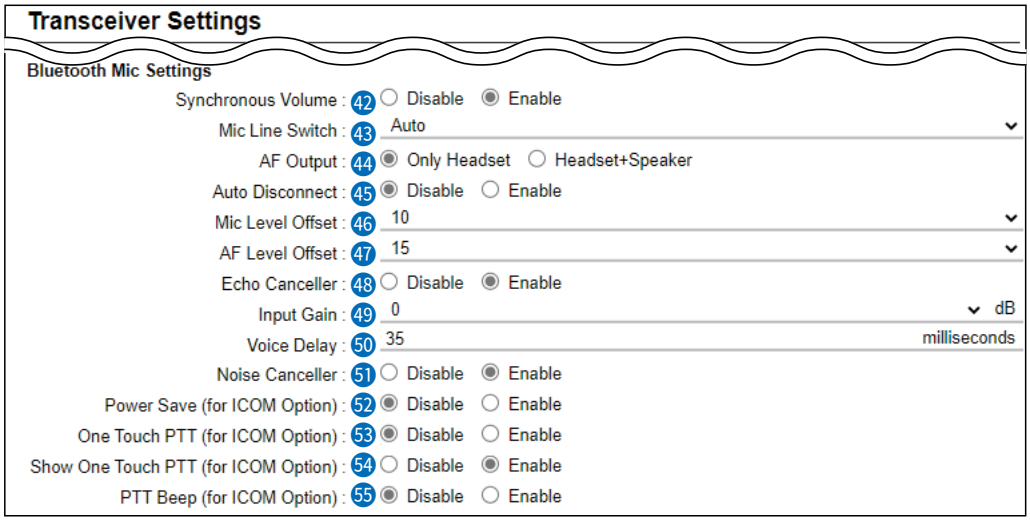

52 Power Save (for ICOM Option) .....

Select whether or not to use the power saving function when using a Bluetooth device. (Default: Disable)

ⓘ The power saving function is temporarily disabled when a call has been received.

ⓘ When transmitting, push [PTT] to cancel the power saving function (a beep sounds,) and then push [PTT] again to transmit.

53 One Touch PTT (for ICOM Option) .....

Select whether or not to use the one touch PTT function when using a Bluetooth device. (Default: Disable)

This function enables you to push [PTT] to transmit and push again to standby, so you can transmit without continuously holding down [PTT].

54 Show One Touch PTT (for ICOM Option) .....

Select whether or not to display “One Touch PTT” on the transceiver’s Bluetooth menu screen. (Default: Disable)

ⓘ Icom has checked the PTT operation with some 3M Peltor headsets, such as the WS Headset XP, WS ProTac XP and WS Alert XP, however, compatibility is not guaranteed.

55 PTT Beep (for ICOM Option) .....

Select whether or not to use the PTT beep function when using a Bluetooth device. (Default: Disable)

When the function is enabled, a beep “Pi-Pa” sounds by pushing [PTT] on the Bluetooth microphone.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

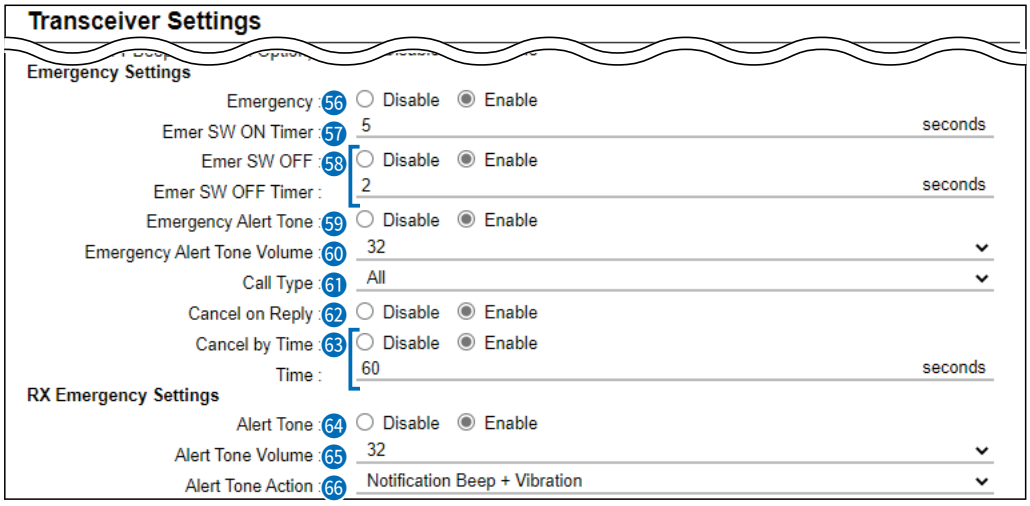

56 Emergency .....

Select whether or not to use the emergency function. (Default: Disable)
This function is usable only when the emergency function is assigned to a programmable key. (p. 6-69)
Holding down the programmable key that the emergency function is assigned to until "Emergency" is displayed turns ON the Emergency function, and sends an emergency call to the previously set User ID. The emergency call is canceled when an RX code is received, or by holding down the programmable key for set period of time in "Emer SW OFF Timer" (See below).

- The time of period for which the key must be held to turn the emergency function ON or OFF is set in [Emer SW ON Timer] or [Emer SW OFF Timer].

57 Emer SW ON Timer .....

Emergency: Enable

Enter the time period for which the programmable key must be held to turn the emergency function ON. (Default: 5 seconds)

58 Emer SW OFF .....

Emergency: Enable

Select whether or not to cancel the Emergency call by pushing the programmable key. (Default: Disable)

When "Enable" is selected, enter the period of time for which the programmable key must be held down to turn OFF the Emergency function, between 1 and 10 seconds. (Default: 2 seconds)

59 Emergency Alert Tone .....

Emergency: Enable

Select whether or not to sound an alarm when the emergency call is sent.
When this item is set to "Disable," IP110H sends the emergency call silently, without any alert on itself. (Default: Enable)

60 Emergency Alert Tone Volume

Emergency: Enable

Set the audio level of the alarm to between 0 and 32. (Default: 32)

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

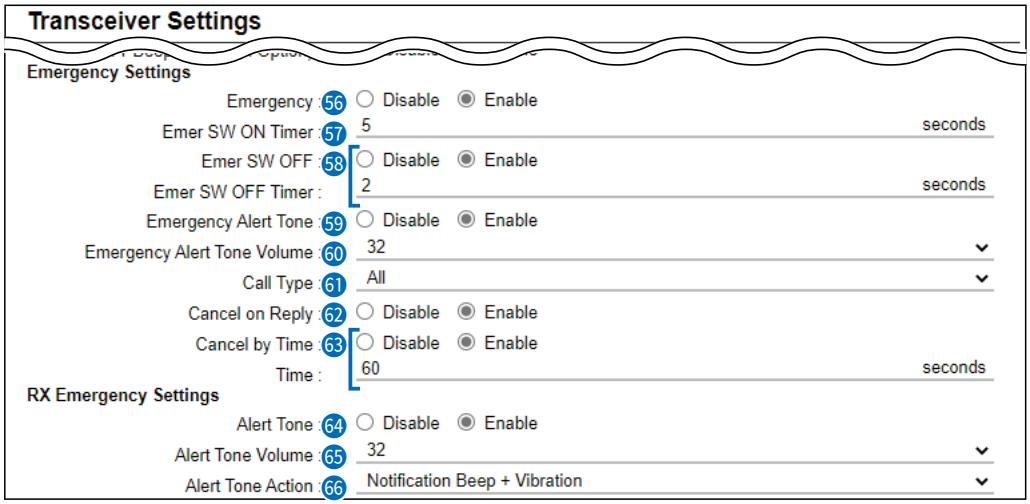

61 Call Type .....
Emergency: Enable

Select the call type of emergency call from Individual, Group, All, or Telephone. (Default: All)

ⓘ If you select “Individual” or “Group,” enter the destination ID (00001 ~ 60000). If you select “Telephone,” enter a Destination Phone Number of up to 31 characters (0–9, #, and *).

62 Cancel on Reply.....
Emergency: Enable

Select whether or not to cancel the emergency call when any RX code is received. (Default: Enable)

63 Cancel by Time .....
Emergency: Enable

Select whether or not to cancel the emergency call after the set period of time has passed. (Default: Disable)

If you select “Enable,” enter a time period to between 1 and 255 seconds. (Default: 60 (seconds))

64 Alert Tone.....
Emergency: Enable

Select whether or not to sound an alarm when an emergency call is received. (Default: Enable)

65 Alert Tone Volume .....
Emergency: Enable

Enter the audio level of the alarm when the emergency call is received to between 0 and 32. (Default: 32)

66 Alert Tone Action .....
Emergency: Enable

Select the Action when an emergency call is received. (Default: Notification Beep+Vibration)

ⓘ In the [Alert Tone Action], select “Notification Beep,” “Vibration,” or “Notification Beep + Vibration” to activate when an Emergency call is received.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

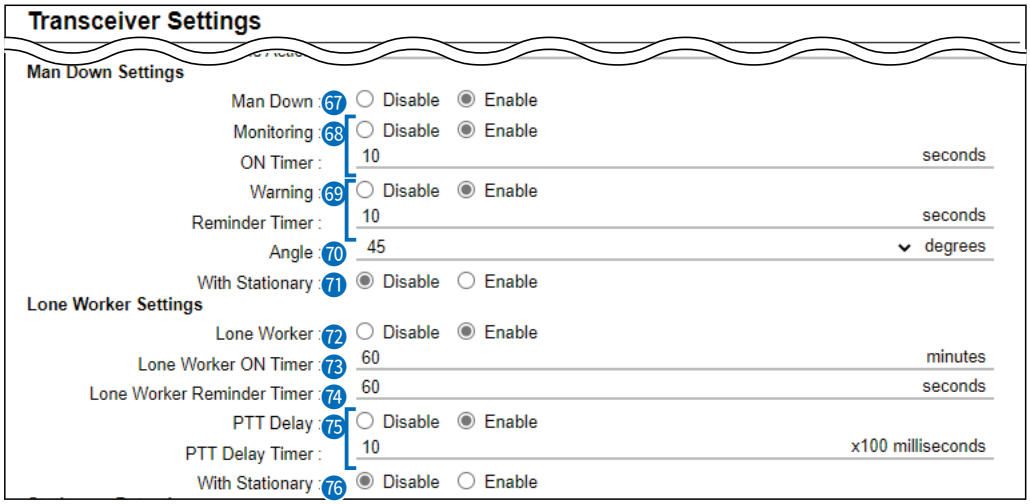

67 Man Down ..... Select whether or not to use the Man Down function. (Default: Disable) If the Man Down function is activated, the Emergency function is automatically turned ON after the set period of time has passed with the transceiver leaning past the preset angle.

Example:
ON Timer: 10 seconds
Reminder Timer: 10 seconds
Angle: 45 degrees

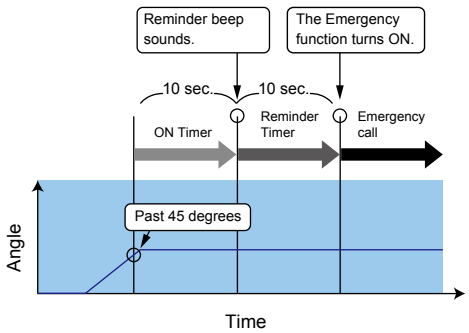

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

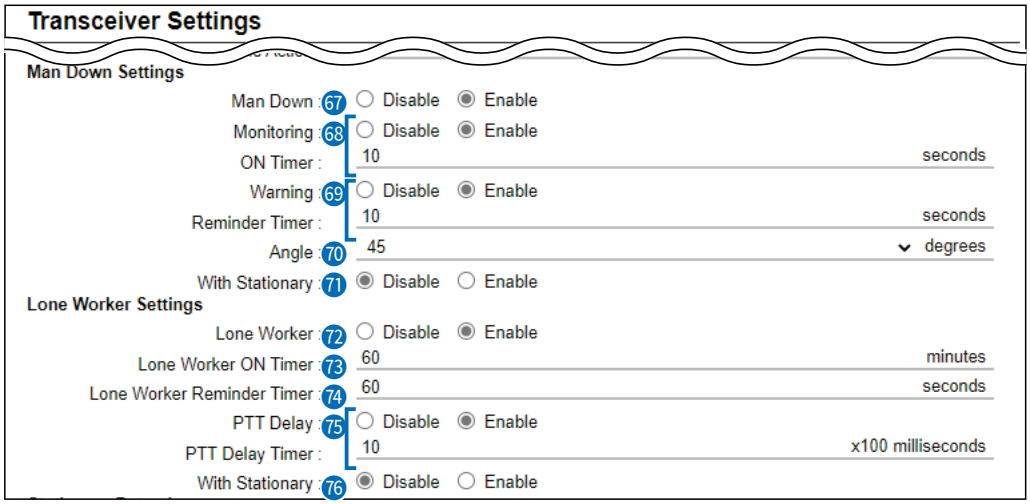

68 Monitoring/ ON Timer .....

Select whether or not to monitor for the set period of time until activating the Man Down function. If [Monitoring] is set to "Enable," set On Timer between 1 and 255 seconds. (Default: 10 seconds)

ⓘ When the transceiver is raised back from the preset angle towards the vertical position within this set period of time, Man Down's ON Timer is reset.

ⓘ After this set period of time has passed with the transceiver leaning past the preset angle, Man Down's Reminder Timer (69) starts.

69 Warning/ Reminder Timer .....

Select whether or not to countdown for set the period of time to start an emergency call transmission. If [Warning] is set to "Enable," set Reminder Timer between 1 and 255 seconds. (Default: 10 seconds)
An emergency call is transmitted after this set period has passed.

ⓘ Countdown beeps sound during the timer period.

ⓘ When the transceiver is raised back from the preset angle towards the vertical position during the countdown, Man Down's ON Timer (68) and Reminder Timer are reset.

70 Angle.....

Set the angle for the Man Down function. (Default: 45 degrees)
If the transceiver leans past the set angle for the Man Down's ON Timer (68) period, Reminder Timer (69) starts.
Select 45, 60, or 75 degrees.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

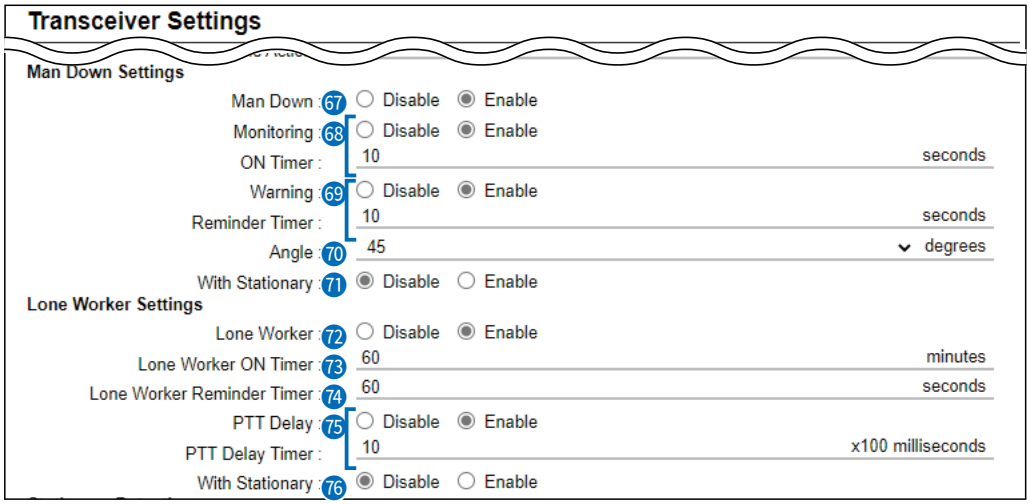

71 With Stationary .....

Select whether or not to use the Man Down function with the Stationary function option. (Default: Disable)
If this item is set to "Enable," Reminder Timer (69) starts when:
- The IP110H leans past the set angle for the Man Down's ON Timer (68) period.
  AND
- The user is detected as stationary for the Man Down's ON Timer period.

After the Reminder Timer period ends, an emergency call is transmitted.
ⓘ The stationary status is detected by Stationary Sensitivity (83).
ⓘ When the transceiver is raised back from the preset angle towards the vertical position, or when the user moves the transceiver during the Reminder Timer period of time, Man Down's ON Timer and Reminder Timer are reset.

Example:
ON Timer: 10 seconds
Reminder Timer: 10 seconds
Angle: 45 degrees

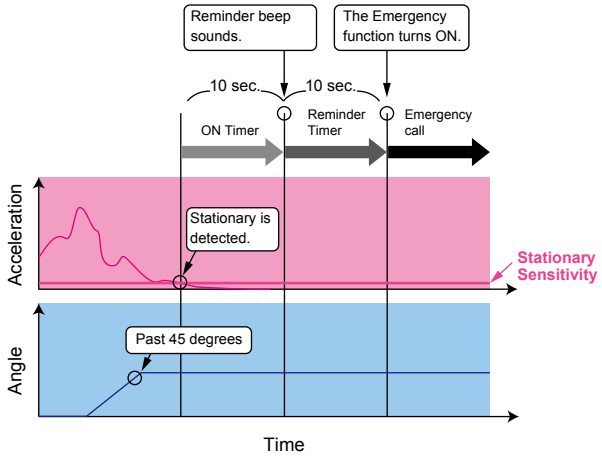

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

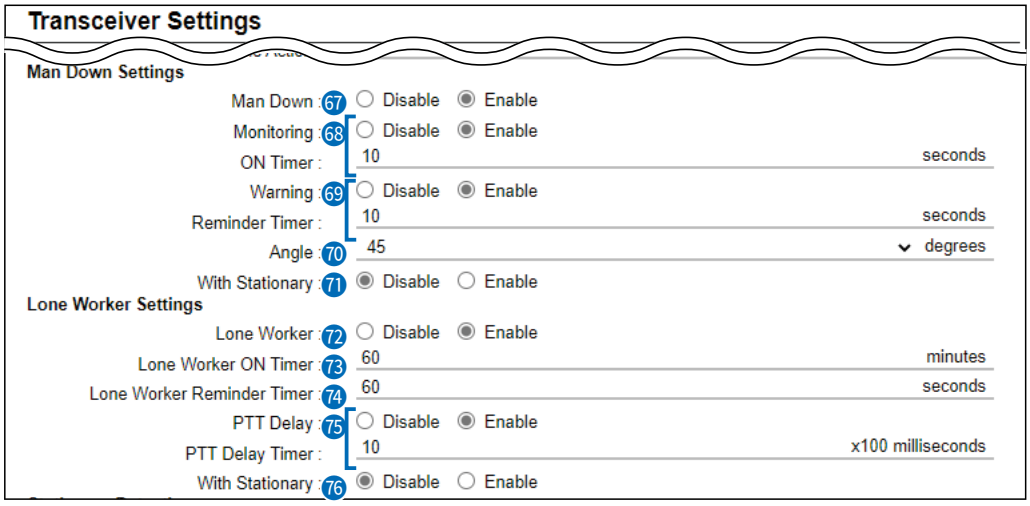

72 Lone Worker ..... Select whether or not to use the Lone Worker function.
(Default: Disable)
If the Lone Worker function is activated, the Emergency function is automatically turned ON after the set period of time has passed with no operation.

Example:
ON Timer: 60 minutes
Reminder Timer: 60 seconds

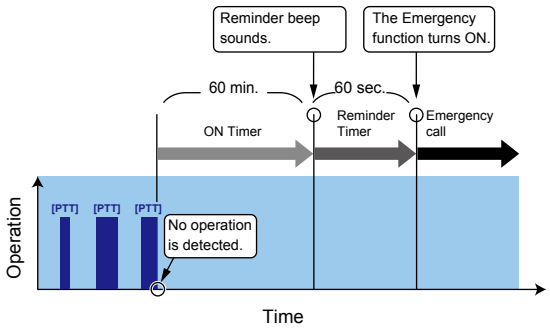

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

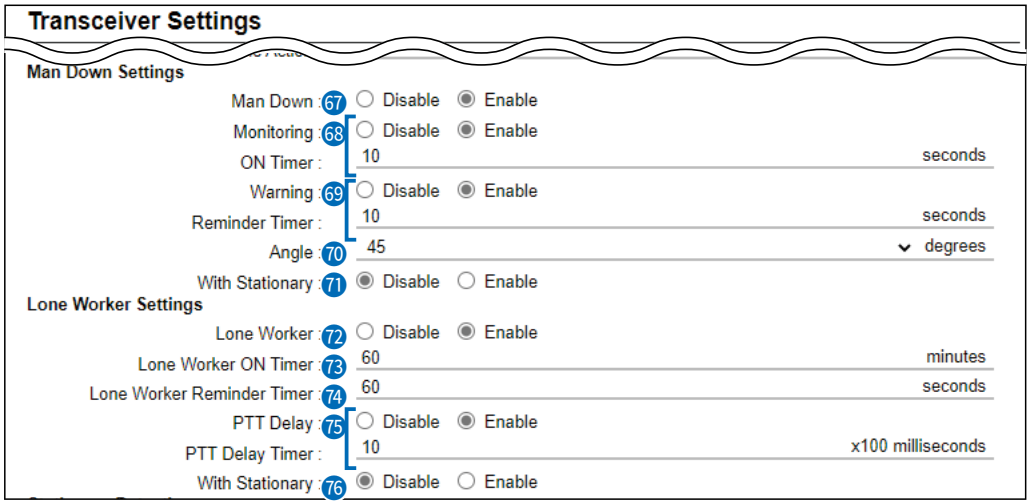

73 Lone Worker ON Timer…… Set the period of time to activate the Lone Worker function to between 1 and 255 minutes (1 minute steps). (Default: 60 minutes)

ⓘ When the IP110H is operated within this set period of time, Lone Worker's ON Timer is reset.

ⓘ After this set period of time has passed with no operation, Lone Worker's Reminder Timer (74) starts.

74 Lone Worker Reminder Timer Set the period of time to start an emergency call transmission to between 1 and 255 seconds (1 second steps). (Default: 60 seconds)
An emergency call is transmitted after this set period has passed.

ⓘ Countdown beeps sound during the timer period.

ⓘ When the IP110H is operated during the countdown, Lone Worker's ON Timer (73) and Reminder Timer are reset.

75 PTT Delay/ PTT Delay Timer…… Set the period of time for the delay time to transmit by pushing [PTT] while Lone Worker's ON Timer (73) and Reminder Timer (74) are activated. (Default: 10 ×100 milliseconds)
Set a time between 1 and 255 ×100 milliseconds (100 millisecond steps).

ⓘ If this item is set to a long period of time, you can reset Lone Worker's ON Timer and Reminder Timer by momentarily pushing [PTT] (for a period of time less than the set time), without transmitting.

ⓘ Hold down [PTT] for more than the selected period of time to transmit.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

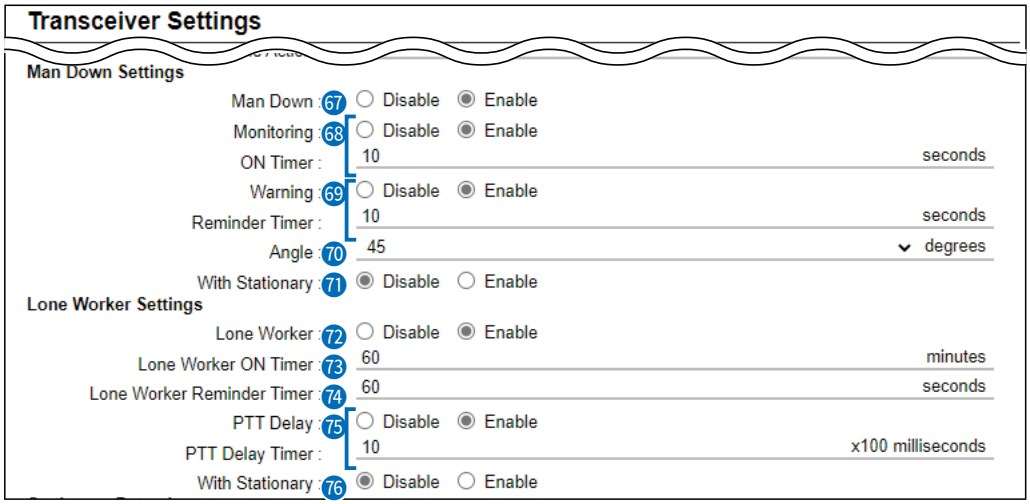

76 With Stationary .....

Select whether or not to use the Lone Worker function with the Stationary function option. (Default: Disable)
If this item is set to "Enable," Reminder Timer (74) is started when:
- No operation occurs for Lone Worker's ON Timer (72) period.
  AND
- The user is detected as stationary for the Lone Worker's ON Timer period.

After the Reminder Timer period ends, the emergency call is transmitted.

ⓘ The stationary status is detected by Stationary Sensitivity (83).

ⓘ When the transceiver is operated, or when the user moves the transceiver during the Reminder Timer period, Lone Worker's ON Timer and Reminder Timer are reset.

Example:
ON Timer: 60 minutes
Reminder Timer: 60 seconds

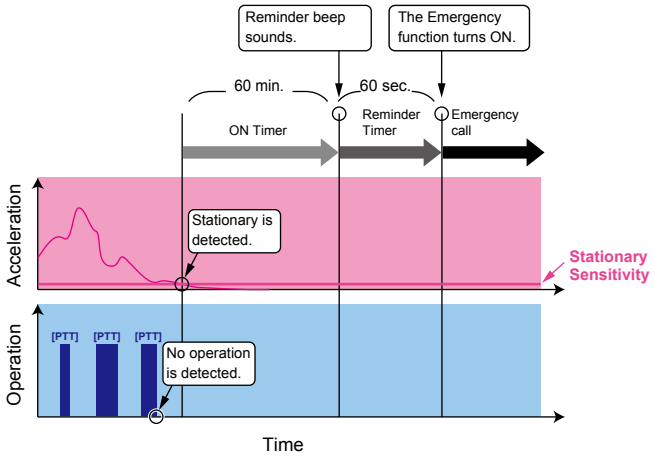

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

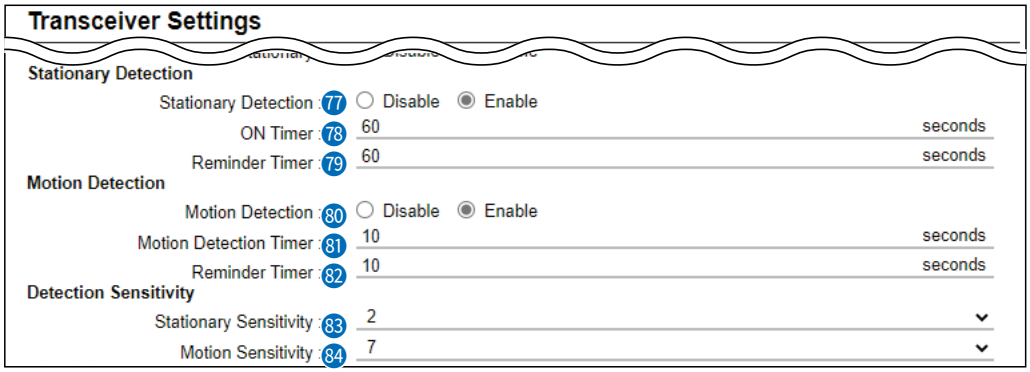

77 Stationary Detection ..... Select whether or not to use the Stationary Detection function. (Default: Disable)

78 ON Timer ..... Set the period of time to activate the Stationary Detection function to between 1 and 255 seconds. (Default: 60 seconds)

ⓘ When the user is detected as stationary for this set period of time, the Stationary Detection's Reminder Timer (79) starts.

ⓘ The stationary status is detected by Stationary Sensitivity.

Example:
ON Timer: 60 seconds
Reminder Timer: 60 seconds

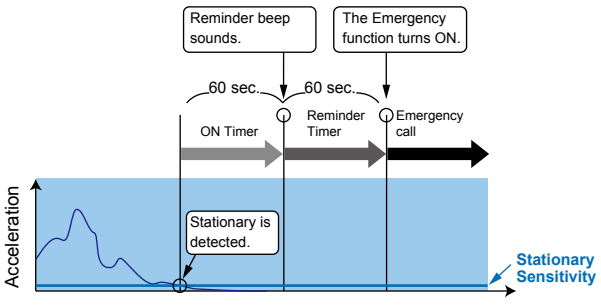

79 Reminder Timer ..... Set the period of time to start an emergency call transmission to between 1 and 255 seconds. (Default: 60 seconds)
An emergency call is transmitted after this set period has passed.

ⓘ Countdown beeps sound during the timer period.

ⓘ If the user moves the transceiver during the countdown, Stationary Detection's ON Timer (78) and Reminder Timer are reset.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

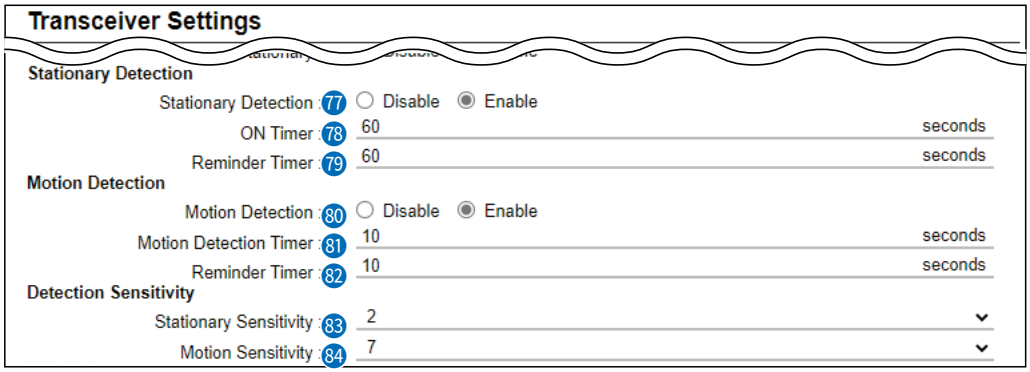

80 Motion Detection ..... Select whether or not to use the Motion Detection function.
(Default: Disable)

81 Motion Detection Timer ... Set the period of time to activate the Motion Detection function to between 1 and 255 seconds. (Default: 10 seconds)

ⓘ When the user continuously moves the transceiver for this set period of time, Motion Detection's Reminder Timer (82) starts.

ⓘ The motion status is detected by Motion Sensitivity.

Example:
Motion Detection Timer: 10 seconds
Reminder Timer: 10 seconds

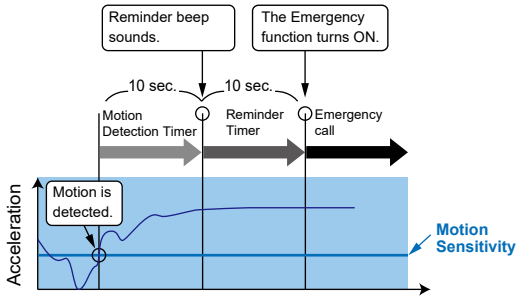

82 Reminder Timer ..... Set the period of time to start an emergency call transmission to between 1 and 255 seconds. (Default: 10 seconds)
An emergency call is transmitted after this set period has passed.

ⓘ Countdown beeps sound during the timer period.

ⓘ When the user stops moving the transceiver during the countdown, Motion Detection Timer (81) and Reminder Timer are reset.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

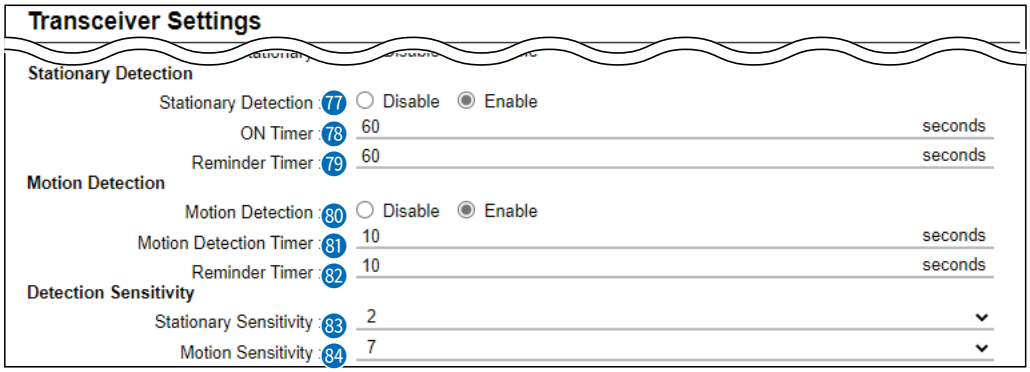

83 Stationary Sensitivity ……

Set the acceleration sensor sensitivity to detect if the user is stationary or not for the Stationary Detection function. (Default: 2)
This setting is used for the Stationary Detection function, and it determines the acceleration threshold level to activate the Stationary Detection's ON Timer (78).
If you set at higher level, the Emergency function is more easily activated.
Select a level between 1 (high sensitivity) and 10 (low sensitivity).

• Sensitivity example

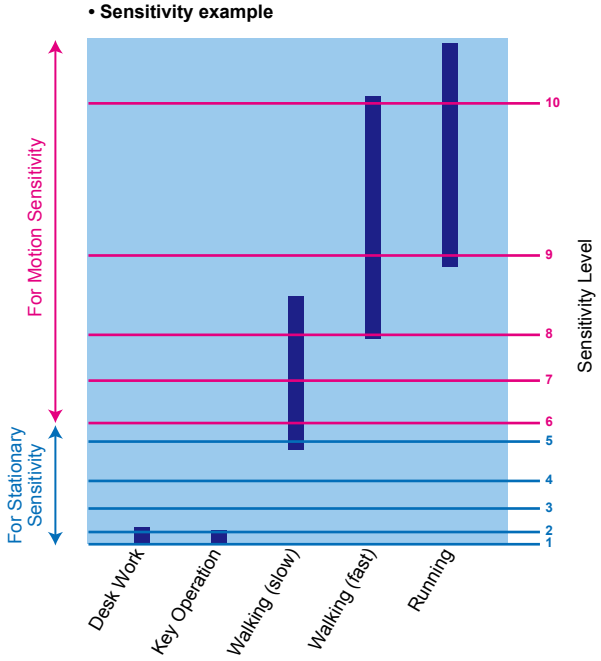

84 Motion Sensitivity ……

Set the acceleration sensor sensitivity to detect whether the user is moving or not, for the Motion Detection function. (Default: 7)
This setting is for the Motion Detection function, and it determines the acceleration threshold level to activate Motion Detection Timer.
If you set a lower level, the Emergency function is more easily activated.
Select a level between 1 (high sensitivity) and 10 (low sensitivity).

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

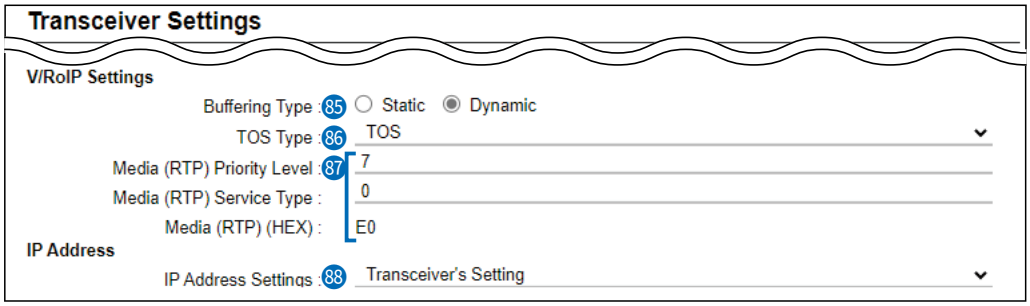

85 Buffering Type ..... Select the buffer type to control any interrupted sound. (Default: Dynamic)

- **Static**
  The buffer time is set [Receive Buffer Size].
  Set the buffer time to between 20 and 500 milliseconds to keep the audio from breaking up. A shorter value improves the delay, but it may frequently break the audio signal.

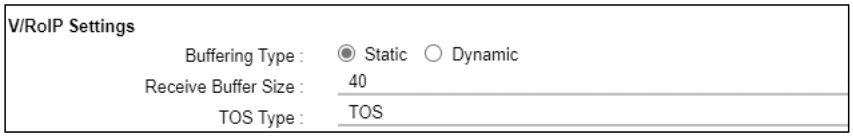

- **Dynamic**
  The buffer time changes according to the audio fluctuation.

86 TOS Type ..... Select the TOS (Type-Of Service) format. (Default: TOS)

- **Not Used:** The TOS function is disabled.
- **TOS:** Sends the 8 bit VoIP packets to the TOS field in the IP header using the TOS format.
  Sets to between 1 (lowest) and 3 bits (Priority level) or 4 and 7 (highest) bits (Type of Service), based on the RFC1349.
  The 1 bit remaining is not used, and is fixed as 0.
- **Diffserv:** Sends the 8 bit VoIP packets to the TOS field in the IP header using the Diffserv (Differentiated Service) format.
  Sets to between 1 and 6 bits (DSCP). The 2 bits remaining are not used, and are fixed as 0.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

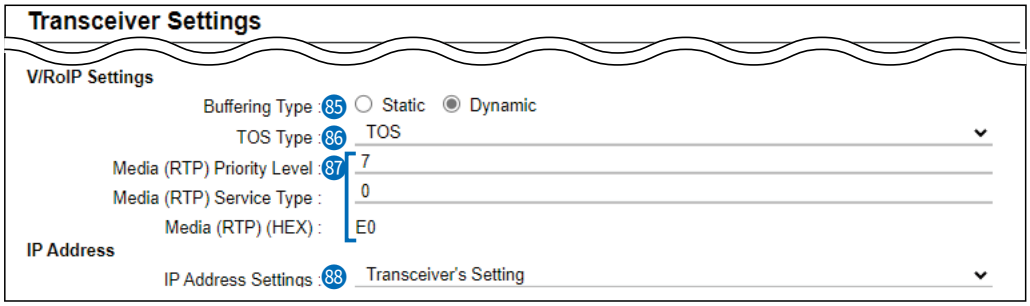

87 Media (RTP).....

Select the Priority level and Service type of the sent VoIP packets.
ⓘ The item is not displayed when [TOS Type] (86) is set to "Not Used."

- **Media (RTP) Priority Level**
  Set the TOS priority level to between 0 (lowest) and 7 (highest). (Default: 7)

- **Media (RTP) Service Type**
  Set the TOS service type code to between 0 and 15. (Default: 0)

- **Media (RTP) DSCP**
  Set the DSCP (Differentiated Services Code Point) code to between 0 and 63. (Default: 56)
  ⓘ This item is displayed when the [TOS Type] (86) is set to "Diffserv."

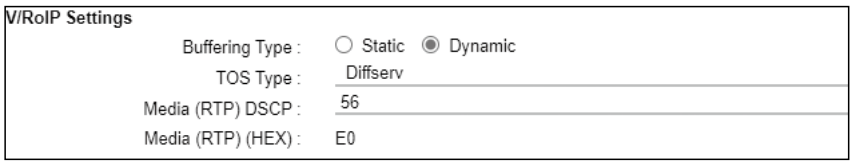

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

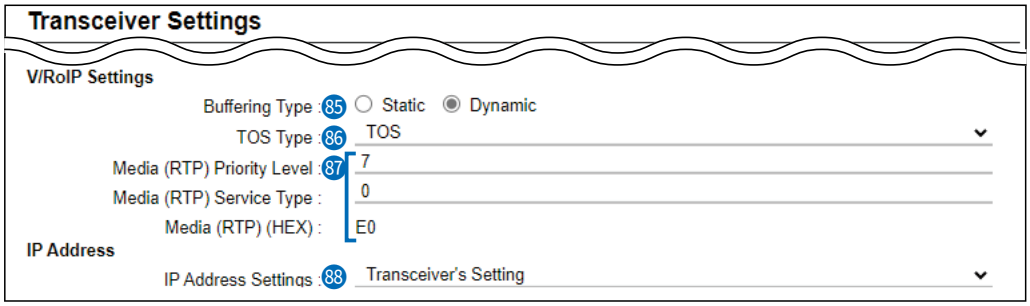

88 IP Address Settings ..... Select the IP110H's IP settings. (Default: Transceiver's Setting)

- **Transceiver's Setting**
  Uses the last IP setting set by the CS-IP110H or the RoIP Gateway.

- **DHCP Client**
  Selects the DHCP Client when the IP address is automatically obtained by a DHCP server.

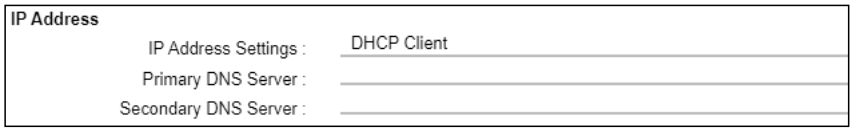

ⓘ If necessary, enter the [Primary DNS Server] or [Secondary DNS Server] settings.

- **Static IP**
  Selects the Static IP address, if it is specified according to your network environment.

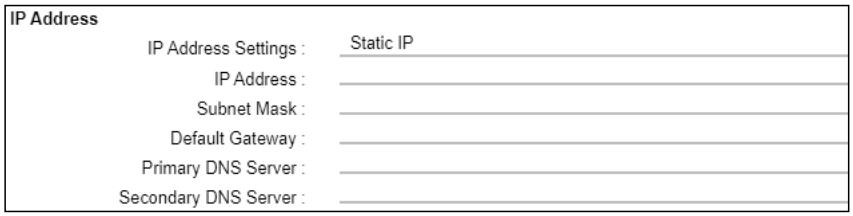

ⓘ Enter the default gateway address, if your network connects to a different network.
ⓘ If necessary, enter the [Primary DNS Server] or [Secondary DNS Server] settings.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

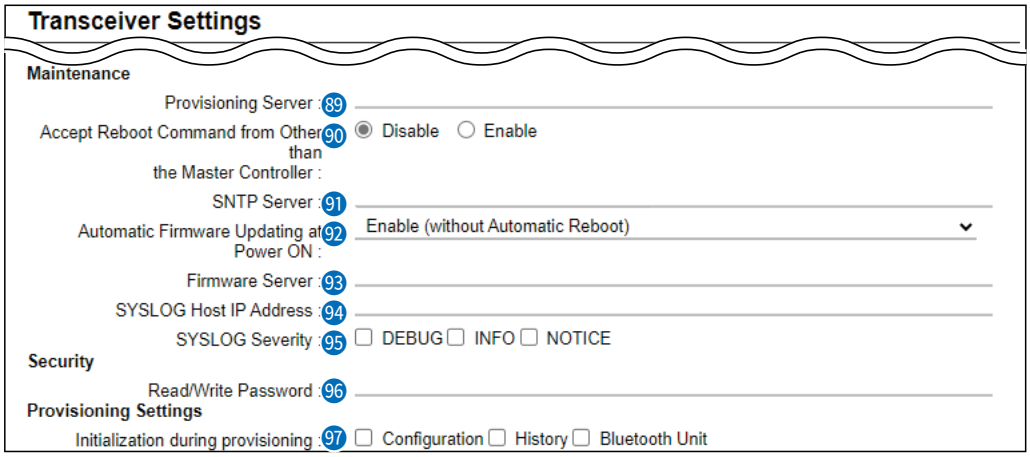

89 Provisioning Server ..... Enter an IP address or Host name of the Provisioning Server for the IP110H, of up to 63 characters.

ⓘ When the RoIP Gateway is used as its Provisioning Server, this entry is not necessary.

90 Accept Reboot Command from Other than the Master Controller Select whether or not the IP110Hs can be rebooted by the other than the specified Provisioning Server (89). (Default: Disable)

ⓘ The VE-PG4, IP1000C, and IP1100CV are compatible with this function. (As of April 2026)

91 SNTP Server ..... Enter the IP address of the device that is specified as the SNTP Server for the IP110H.

ⓘ When the RoIP Gateway is used as its SNTP Server, this entry is not necessary.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

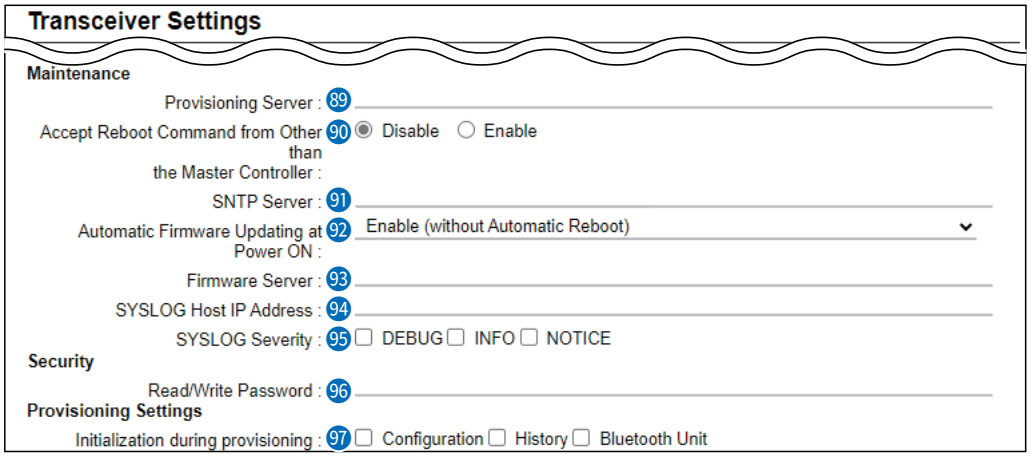

92 Automatic Firmware Updating at Power ON .....

Select whether or not the IP110H will use the Automatic Update function. (Default: Enable (without Automatic Reboot))

- **Disable**
  Disables the automatic firmware updating when the IP110H is turned ON.

- **Enable (without Automatic Reboot)**
  When this setting is set to “Enable (without Automatic Reboot),” the IP110H works as follows.
  1. The IP110H confirms the latest firmware in the RoIP Gateway when it is turned ON.
  2. The IP110H automatically downloads the firmware if it needs to be updated.
  3. The IP110H will be updated when it is turned ON again.

- **Enable (with Automatic Reboot)**
  When this setting is set to “Enable (with Automatic Reboot),” the IP110H works as follows.
  1. The IP110H confirms the latest firmware in the RoIP Gateway when it is turned ON.
  2. The IP110H automatically downloads the firmware if it needs to be updated.
  3. The IP110H is updated automatically, and then it is rebooted.

  ⓘ You can check the firmware version of the IP110H on the [TOP] menu.

93 Firmware Server.....

Enter an IP Address or Host name of the Firmware Server for the IP110H, of up to 63 characters.

ⓘ When the RoIP Gateway is used as its Firmware Server, this entry is not necessary.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

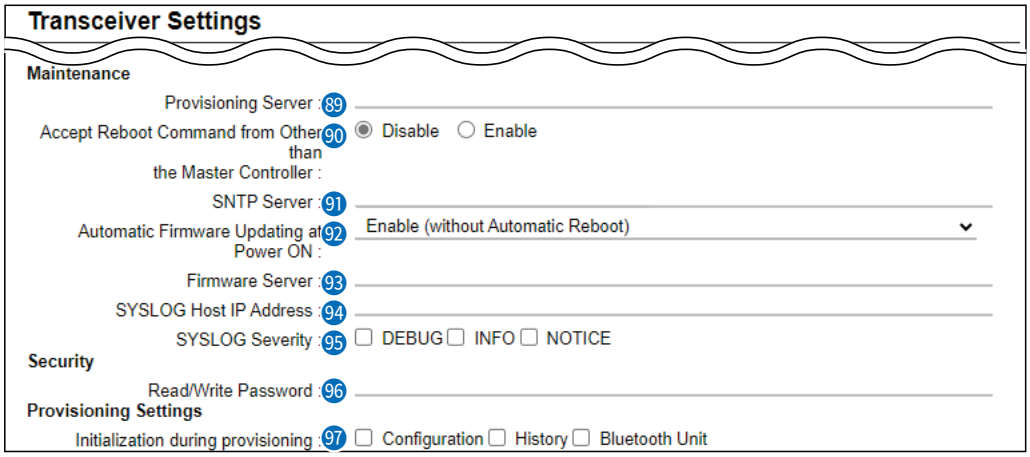

94 SYSLOG Host IP Address

Enter the SYSLOG host's address.
ⓘ The host device must have the SYSLOG server function.

95 SYSLOG Severity .....

Select the log information to send to the SYSLOG host. The SYSLOG host is sent to another host that is set in the [SYSLOG Host IP Address] (94). (Default: ☐ DEBUG ☐ INFO ☐ NOTICE)
ⓘ Enter a check mark to send the log entries.

96 Read/Write Password .....

Enter a password of up to 16 characters. The password is used when reading from, or writing to the IP110H, or updating the firmware using the CS-IP110H*.
* CS-IP110H is the programming software for the IP110H, and can be downloaded from the Icom website.

97 Initialization during provisioning .....

Select the item that you want to initialize the setting during provisioning. (Default: ☐ Configuration ☐ History ☐ Bluetooth Unit)
ⓘ Enter a check mark to initialize.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

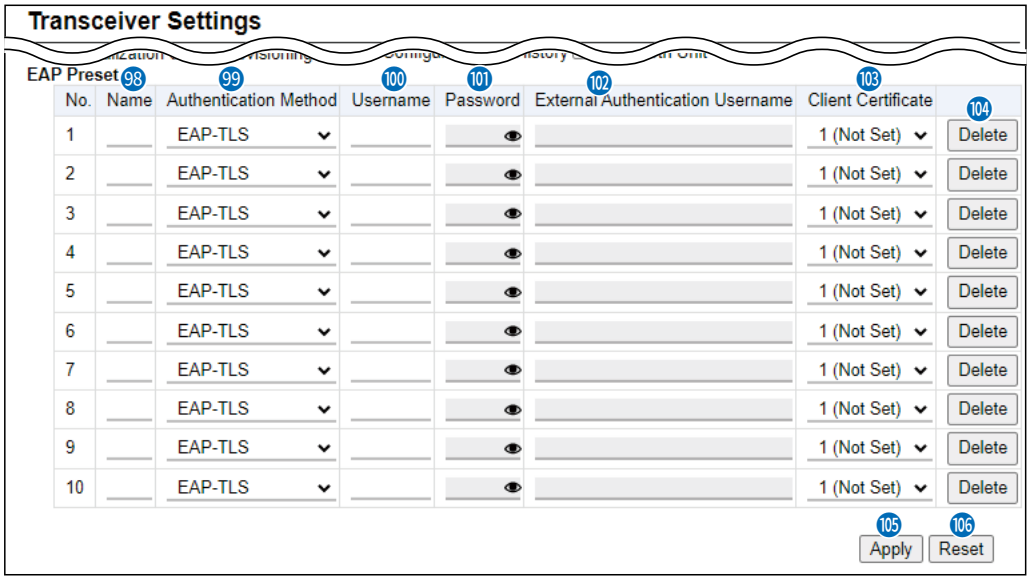

98 Name ..... Enter a name of up to 31 characters.

99 Authentication Method..... Set an authentication method to “PEAP (MSCHAPv2),” “EAP-TTLS (MSCHAPv2),” or “EAP-TLS.” (Default: EAP-TLS)

100 Username..... Enter a Username for the EAP authentication of up to 63 characters.
ⓘ When authenticating via Windows Active Directory, enter in the “NT domain name\account name” format.

101 Password ..... Enter a password of up to 63 characters.
ⓘ This item can be set when [Authentication Method] (99) is set to “PEAP (MSCHAPv2)” or “EAP-TTLS (MSCHAPv2).”

102 External Authentication Username
If you use a different name for the external authentication from it for the internal authentication, enter a name of up to 63 characters.
ⓘ This item can be set when [Authentication Method] (99) is set to “PEAP (MSCHAPv2)” or “EAP-TTLS (MSCHAPv2).”
ⓘ When this item is not set, the name set in [Username] is used for the internal authentication and external authentication.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Settings [IP110H]

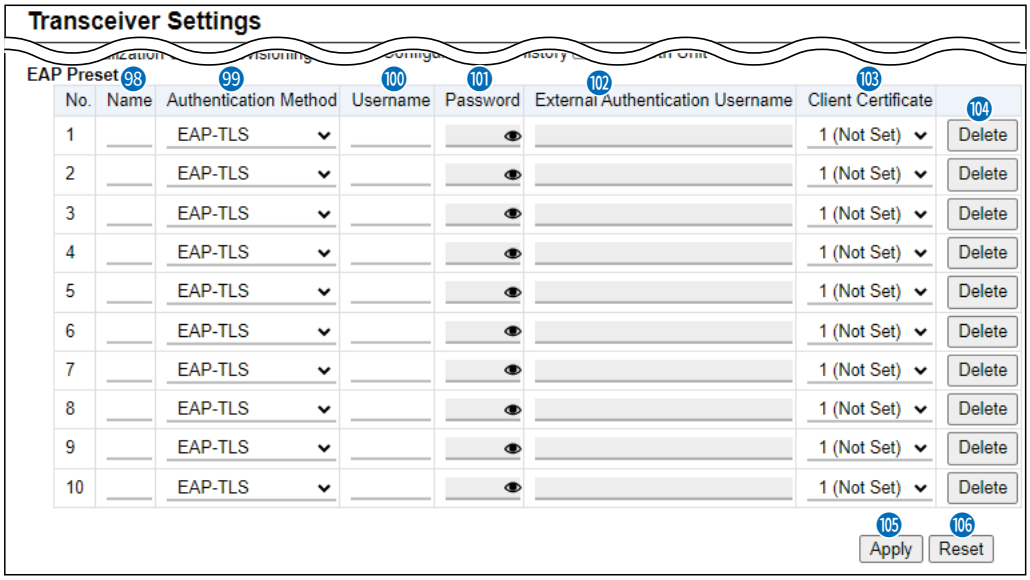

103 Client Certificate ..... Select one of the certificates that have been registered in [Certificate Management].
ⓘ This item can be set when [Authentication Method] (99) is set to “EAP-TLS.”

104 <Delete> ..... Click to delete the EAP preset.

105 <Apply> ..... Click to apply the entries.
ⓘ Some parts of the entries are displayed in [Transceiver Setting List], such as the Transceiver Model, Name, Unit ID, Use ID List, Area Call, Message, and Status.

106 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Certificate Management [IP110H]

Set the certificate to use the EAP Preset settings.

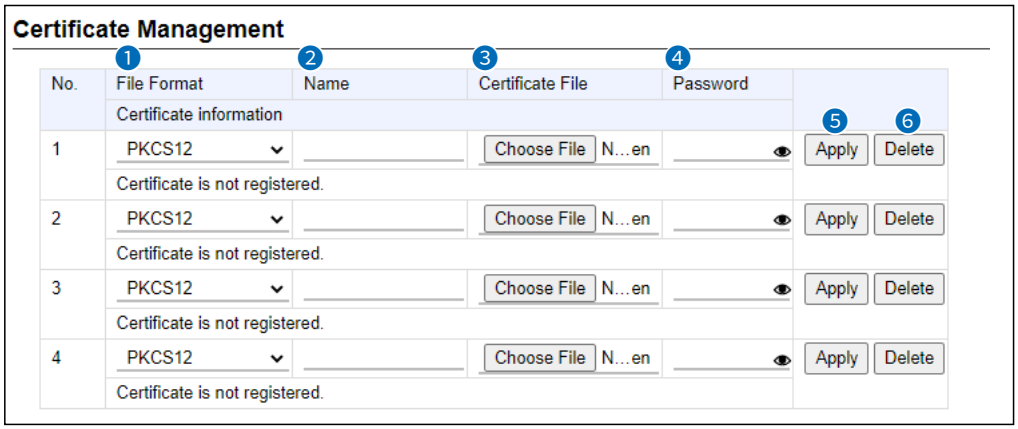

❶ File Format ..... Select the certificate file format. (Default: PKCS12)
- **PKCS12:** Root Certificate and Client Certificate
- **PEM (Only Root Certificate):** Root Certificate

❷ Name ..... Enter a name of up to 31 characters.

❸ Certificate File ..... Click to <Choose File> to select a certificate.

❹ Password ..... Enter a password of up to 127 characters.
ⓘ This item can be set when [File Format] (❶) is set to “PKCS12.”

❺ <Apply> ..... Click to register the certificates.
ⓘ The previous certificates are overwritten by the new certificates.

❻ <Delete> ..... Click to delete the registered certificate.

Transceiver Settings screen

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Copy Transceiver Settings

The individual settings on the [Transceiver Settings] screen can be copied to another WLAN transceiver.
ⓘ IP address settings are not copied.

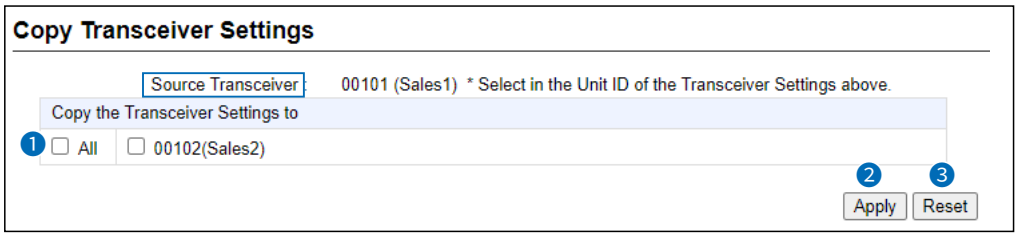

❶Check Box ..... Enter a check mark to [All] or the [Unit ID] that you want to copy the settings to.

❷<Apply> ..... Click to apply the entries.
ⓘ The entries in the [Transceiver Settings] of the Source Transceiver are copied to the transceiver settings that have a check mark in [Check Box] (❶).

❸<Reset> ..... Click to reset the settings.
ⓘ You cannot reset, after clicking <Apply>

Transceiver Controller > Transceiver Settings > Transceiver Settings

■ Transceiver Setting List

Display the list of the registered WLAN transceivers.
ⓘ When verifying the contents, or editing the settings, select the individual number in the Unit ID.

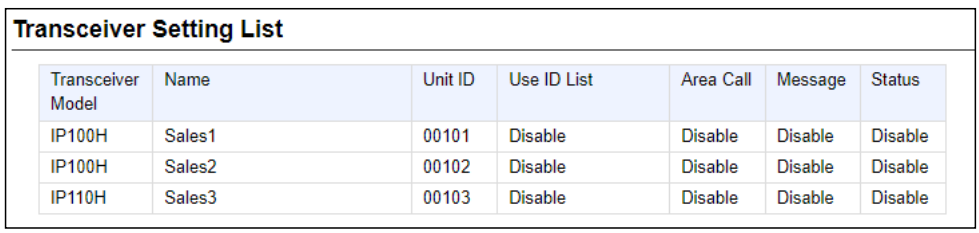

Transceiver Model	Name	Unit ID	Use ID List	Area Call	Message	Status
IP100H	Sales1	00101	Disable	Disable	Disable	Disable
IP100H	Sales2	00102	Disable	Disable	Disable	Disable
IP110H	Sales3	00103	Disable	Disable	Disable	Disable

Wireless LAN screen

Transceiver Controller > Common Settings > Wireless LAN

■ Wireless LAN

Register wireless LAN settings that are commonly used by the WLAN transceivers.
You can individually set the common settings to each registered group in [Profile] on the [Common Settings] screen.
If any setting on this screen has been changed, you must reboot the WLAN transceivers.

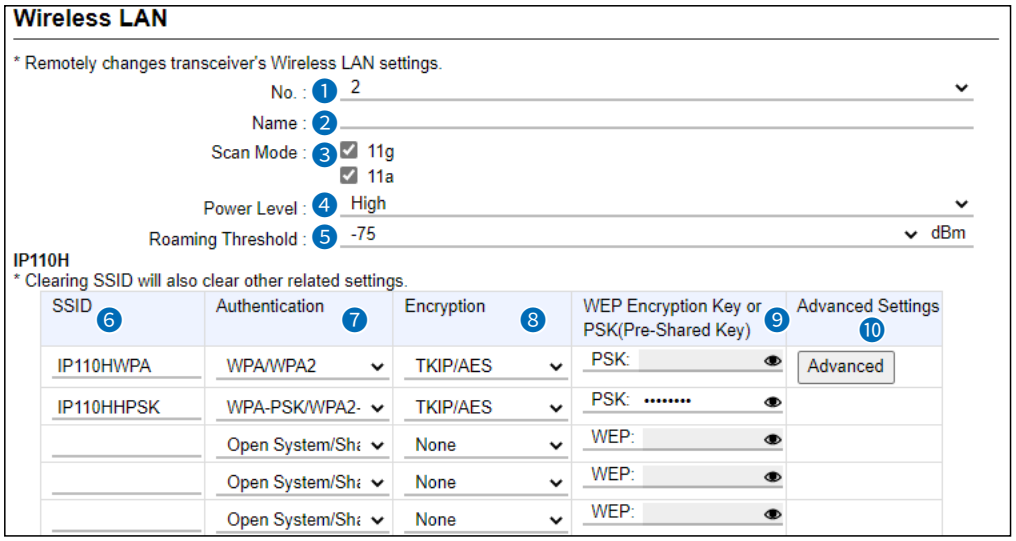

1 No. ..... Select a group number between 1 and 20 to assign to the WLAN transceivers.
Up to 20 groups can be registered. (Default: 1)

2 Name ..... Enter a Group name of up to 31 characters. (Default: Blank)

3 Scan Mode ..... Select the frequency band that the WLAN transceiver uses.
(Default: ☑ 11g, ☑ 11a)
Selecting “11g” includes “11b.”
ⓘ Access points that comply with the wireless LAN standards can be used with the WLAN transceiver.

4 Power Level..... Set the WLAN transceiver transmit power level to High, Middle, or Low.
(Default: High)
ⓘ When “High” is set, the transmission distance of the WLAN transceiver is maximum.
Or when setting to a lower level, the distance will be reduced.
ⓘ Power Level is set to a lower level when you want to:
- Reduce the communication range.
- Limit the communication area and improve security.
- Reduce electrical interference among WLAN transceivers.
- Control the communication speed in an environment where some access points are installed in a comparatively small area.

Wireless LAN screen

Transceiver Controller > Common Settings > Wireless LAN

■ Wireless LAN

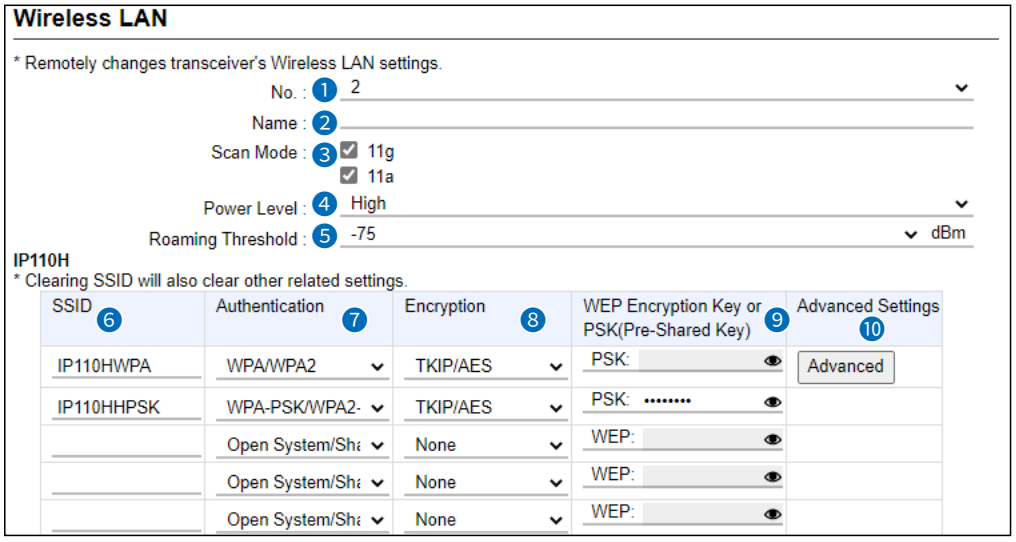

5 Roaming Threshold ..... Set the received signal strength level when the WLAN transceiver starts roaming.
The settable level is between –1 and –100 dBm. (Default: –75 (dBm))

ⓘ When setting to a high level (example: –50 dBm), it becomes easy to start roaming. Or when setting to a low level (example: –90 dBm), it becomes difficult to start roaming.

IP110H

6 SSID ..... Enter an SSID that is the same as that of the wireless access point.
Enter up to 32 characters, using numbers, symbols and letters (both lower and upper case).
Be careful of the difference between lower and upper case letters.

ⓘ Information

- Up to 10 SSIDs can be registered.
- The SSID is used to separate the wireless network groups. You cannot connect to different SSID groups.
- If two or more wireless access points exist in the same area, each wireless network group is identified by the SSID (wireless network name).
- If you register two or more SSIDs, the WLAN transceiver connects to the SSID which has the strongest radio signal.
- For any other wireless device, this may be called ESSID.
- The setting before version 2.04 automatically moves to the top of the SSID setting.

NOTE:
You cannot apply the Wireless LAN settings when:

- The setting for the same "SSID"(6) and "Encryption" (8) as that you entered already exists.
- The top of the SSID setting overlaps with other Wireless LAN (a different value is set in "No." (1)) settings.

Wireless LAN screen

Transceiver Controller > Common Settings > Wireless LAN

■ Wireless LAN

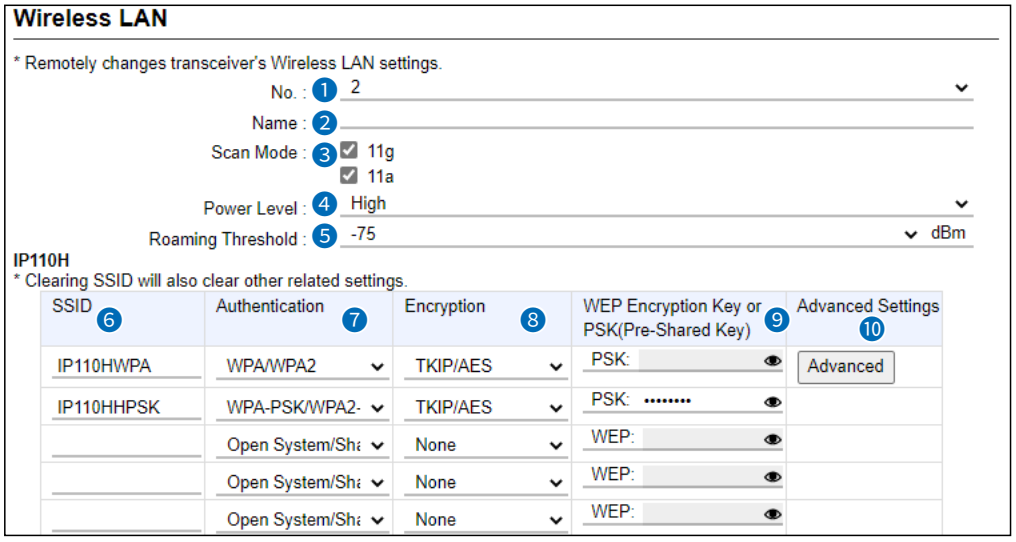

IP110H (Continued)

7 Authentication ..... Select the authentication method that is the same as that of the wireless access point. (Default: Open System/Shared Key)

ⓘ Be sure to verify the Access point setting, because the terminals and access points cannot communicate using different authentication methods.

About authentication methods

- **Open System/Shared Key**
  When accessing a wireless access point, "Open System" and "Shared Key" are automatically recognized. If the Encryption key matches the key in the Access point, they can communicate.

- **Open System**
  When accessing a wireless access point, confirming the encryption is not necessary.

- **WPA/WPA2**
  The "WPA" and "WPA2" authentications are automatically recognized.

- **WPA-PSK/WPA2-PSK**
  The "WPA-PSK" and "WPA2-PSK" authentications are automatically recognized.

The combination of the Authentication and Encryption

	Open System	Open System/ Shared Key	WPA WPA2	WPA-PSK WPA2-PSK
None	✔	✔	–	–
WEP RC4	✔	✔	–	–
TKIP/AES	–	–	✔	✔

Wireless LAN screen

Transceiver Controller > Common Settings > Wireless LAN

■ Wireless LAN

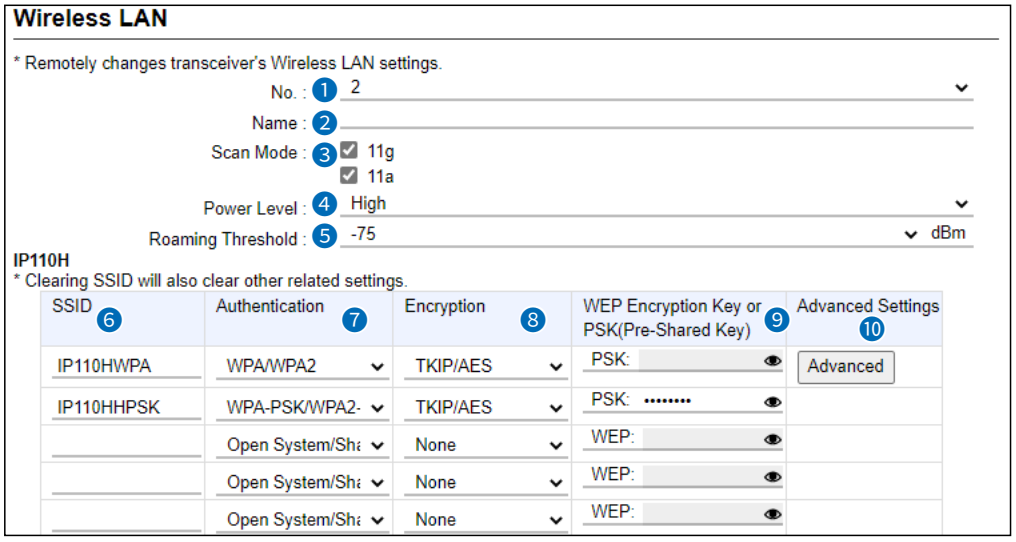

IP110H (Continued)

8 Encryption .....

Select the encryption type that is the same as that of the wireless access point. (Default: None)

ⓘ Be sure to verify the access point setting, because the terminals and access points cannot communicate using different encryption.

About the encryption types

- **None**

  No data is encrypted.

  ⓘ This option can be selected when [Authentication] (7) is set to "Open System" or "Open System/Shared Key."

- **WEP RC4**

  It is an encryption type that can communicate when the encryption keys match.

  ⓘ You can set the encryption key length to between 64 (40) and 128 (104) bits.

  ⓘ You can select this option when [Authentication] (7) is set to "Open System" or "Open System/Shared Key."

- **TKIP/AES**

  Either the "TKIP" or "AES" encryptions are automatically recognized when connecting to a wireless access point.

  ⓘ You can select this option when [Authentication] (7) is set to "WPA/WPA2" or "WPA-PSK/WPA2-PSK."

Wireless LAN screen

Transceiver Controller > Common Settings > Wireless LAN

■ Wireless LAN

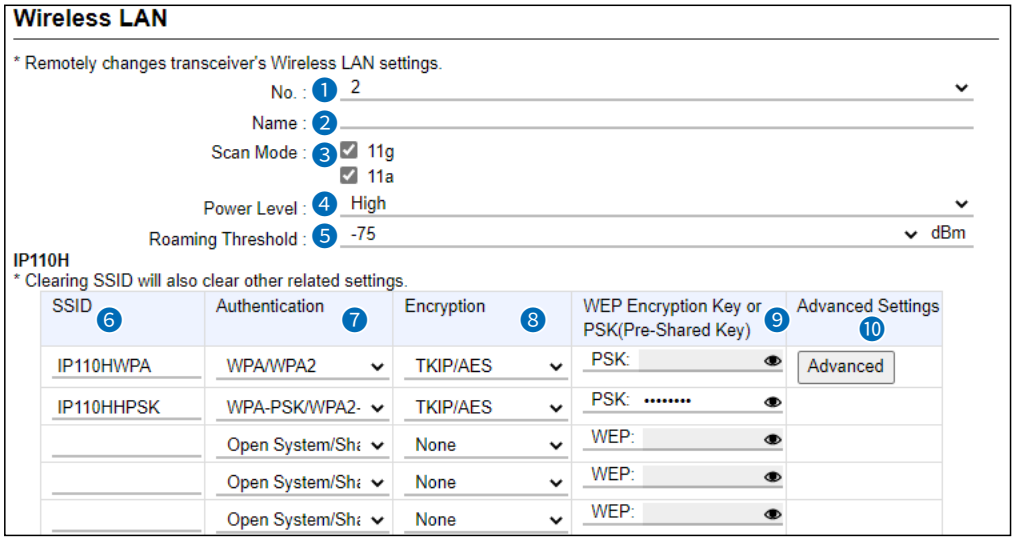

IP110H (Continued)

9 WEP Encryption Key or PSK (Pre-Shared Key) ……

- **WEP Encryption Key**
  Enter the encryption key that is the same as that of the wireless access point.



ⓘ This option can be selected when [Authentication] (7) is set to “Open System” or “Open System/Shared Key.”
ⓘ Enter hexadecimal numbers with numbers (0 to 9) and letters (A to F). Or enter ASCII characters. The key length is same as the displayed digits, 10 or 26 using hexadecimal numbers, or half of the displayed digits, 5 or 13 characters using ASCII characters.

- **PSK (Pre-Shared Key)**
  Enter the pre-shared key that is the same as that of the wireless access point.



ⓘ This option can be selected when [Authentication] (7) is set to “WPA-PSK/WPA2-PSK.”
ⓘ Enter hexadecimal numbers with numbers (0 to 9) and letters (A to F). Or enter ASCII characters. The key length is 64 digits using hexadecimal number, or 8 to 63 characters using ASCII characters (case sensitive).

Wireless LAN screen

Transceiver Controller > Common Settings > Wireless LAN

■ Wireless LAN

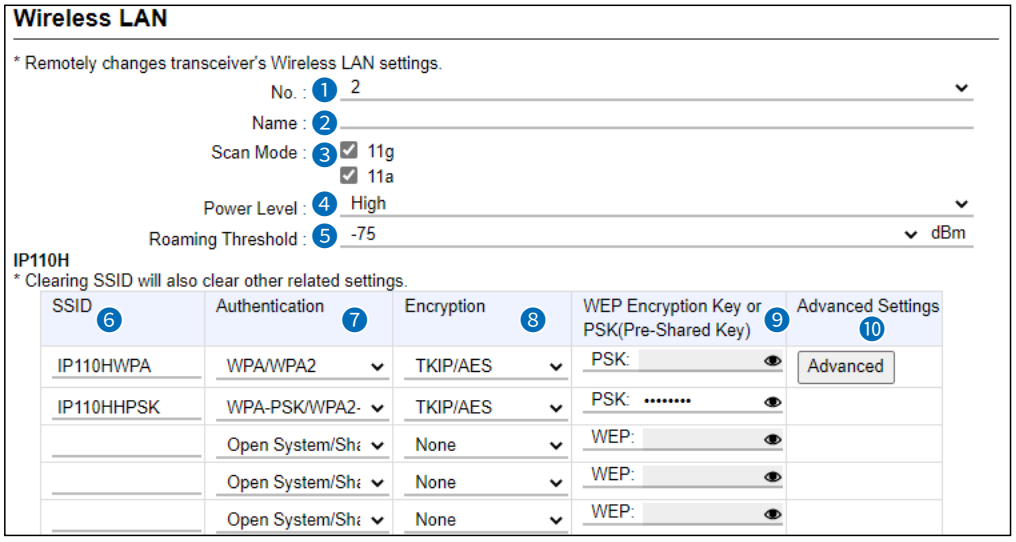

IP110H (Continued)

⑩ Advanced Settings ..... Displayed only when “Authentication” (⑦) is set to “WPA/WPA2.” Click <Advanced> to display the Wireless LAN Advanced Settings window.
Select “EAP Preset No.” for each IP110H registered on the Transceiver Settings screen, and then click <Apply>.

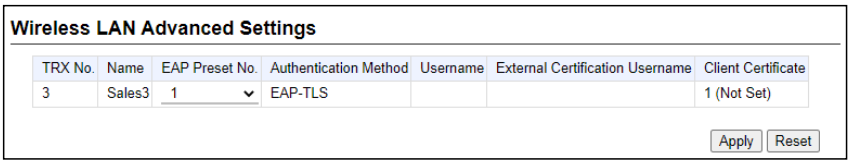

Wireless LAN screen

Transceiver Controller > Common Settings > Wireless LAN

■ Wireless LAN

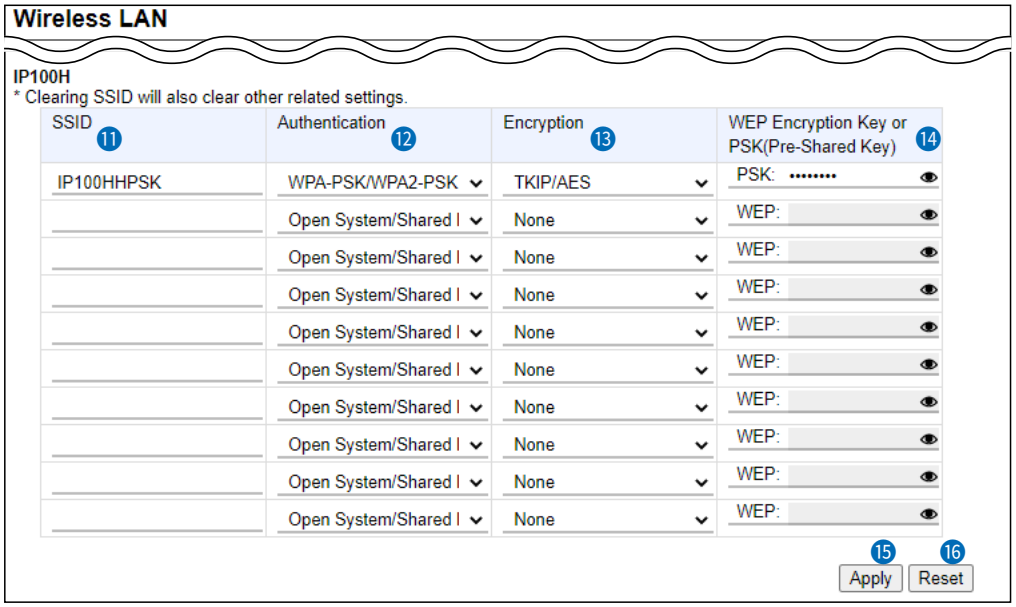

IP100H

⓫ SSID .....

Enter an SSID that is the same as that of the wireless access point.
Enter up to 32 characters, using numbers, symbols and letters (case sensitive).
Be careful of the difference between lower and upper case letters.

ⓘ Information

- Up to 10 SSIDs can be registered.
- The SSID is used to separate the wireless network groups. You cannot connect to different SSID groups.
- If two or more wireless access points exist in the same area, each wireless network group is identified by the SSID (wireless network name).
- If you register two or more SSIDs, the WLAN transceiver connects to the SSID which has the strongest radio signal.
- For any other wireless device, this may be called ESSID.
- The setting before version 2.04 automatically moves to the top of the SSID setting.

NOTE:

You cannot apply the Wireless LAN settings when:

- The setting for the same “SSID”(⓫) and “Encryption” (⓭) as that you entered already exists.
- The top of the SSID setting overlaps with other Wireless LAN (a different value is set in “No.” (❶)) settings.

Wireless LAN screen

Transceiver Controller > Common Settings > Wireless LAN

■ Wireless LAN

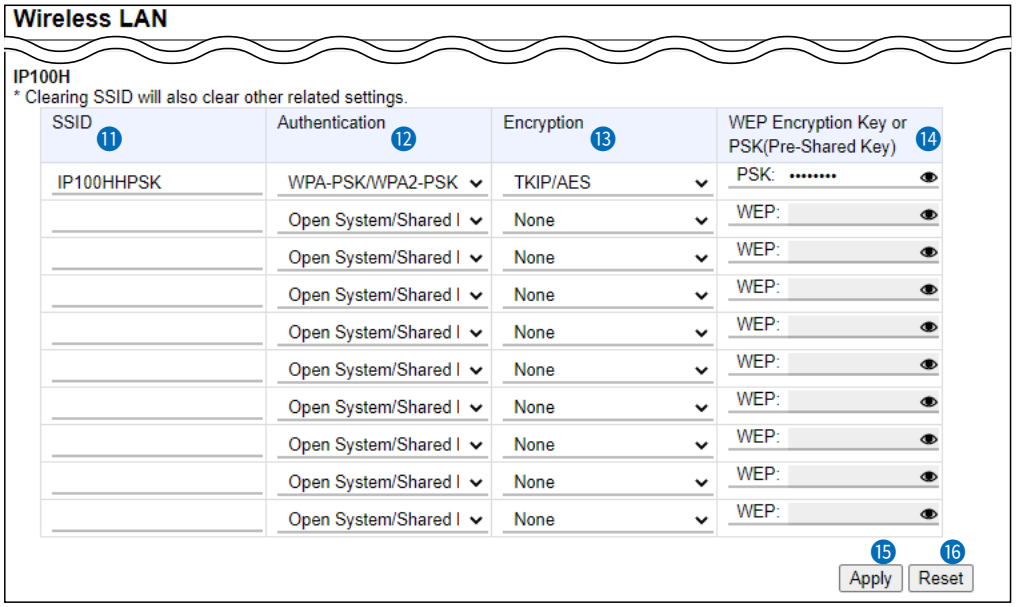

IP100H (Continued)

⑫ Authentication .....

Select the authentication method that is the same as that of the wireless access point. (Default: Open System/Shared Key)

ⓘ Be sure to verify the Access point setting, because the terminals and access points cannot communicate using different authentication methods.

About authentication methods

- **Open System/Shared Key**
  When accessing a wireless access point, “Open System” and “Shared Key” are automatically recognized. If the Encryption key matches the key in the Access point, they can communicate.

- **Open System**
  When accessing a wireless access point, confirming the encryption is not necessary.

- **WPA-PSK/WPA2-PSK**
  The “WPA-PSK” and “WPA2-PSK” authentications are automatically recognized.

The combination of the Authentication and Encryption

	Open System	Open System/ Shared Key	WPA-PSK WPA2-PSK
None	✔	✔	–
WEP RC4	✔	✔	–
TKIP/AES	–	–	✔

Wireless LAN screen

Transceiver Controller > Common Settings > Wireless LAN

■ Wireless LAN

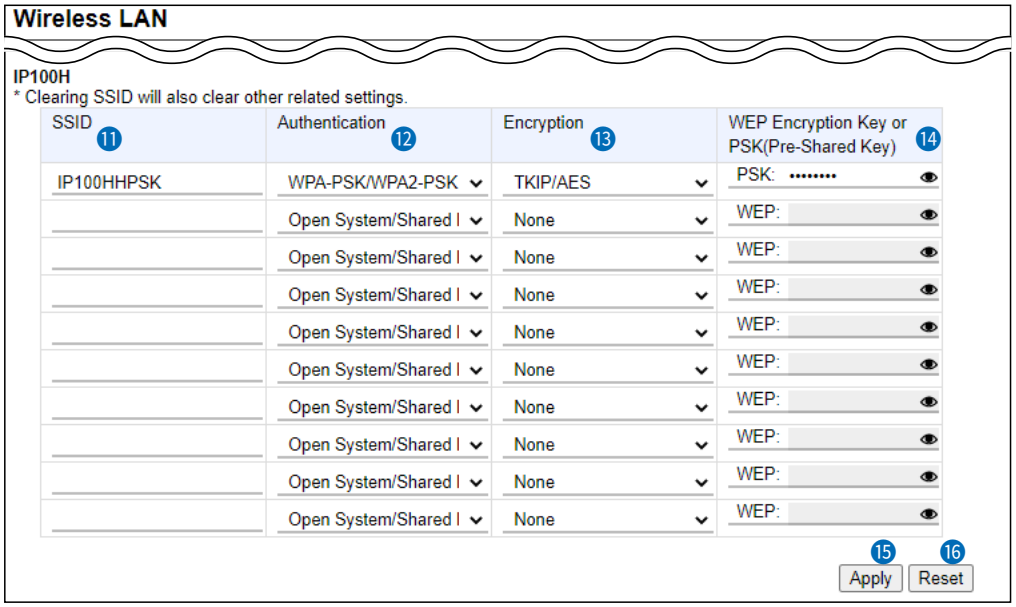

IP100H (Continued)

13 Encryption .....

Select the encryption type that is the same as that of the wireless access point. (Default: None)

ⓘ Be sure to verify the access point setting, because the terminals and access points cannot communicate using different encryption.

About the encryption types

- **None**

  No data is encrypted.

  ⓘ This option can be selected when [Authentication] (12) is set to “Open System” or “Open System/Shared Key.”

- **WEP RC4**

  It is an encryption type that can communicate when the encryption keys match.

  ⓘ You can set the encryption key length to between 64 (40) and 128 (104) bits.

  ⓘ You can select this option when [Authentication] (12) is set to “Open System” or “Open System/Shared Key.”

- **TKIP/AES**

  Either the “TKIP” or “AES” encryptions are automatically recognized when connecting to a wireless access point.

  ⓘ You can select this option when [Authentication] (12) is set to “WPA-PSK/WPA2-PSK.”

Wireless LAN screen

Transceiver Controller > Common Settings > Wireless LAN

■ Wireless LAN

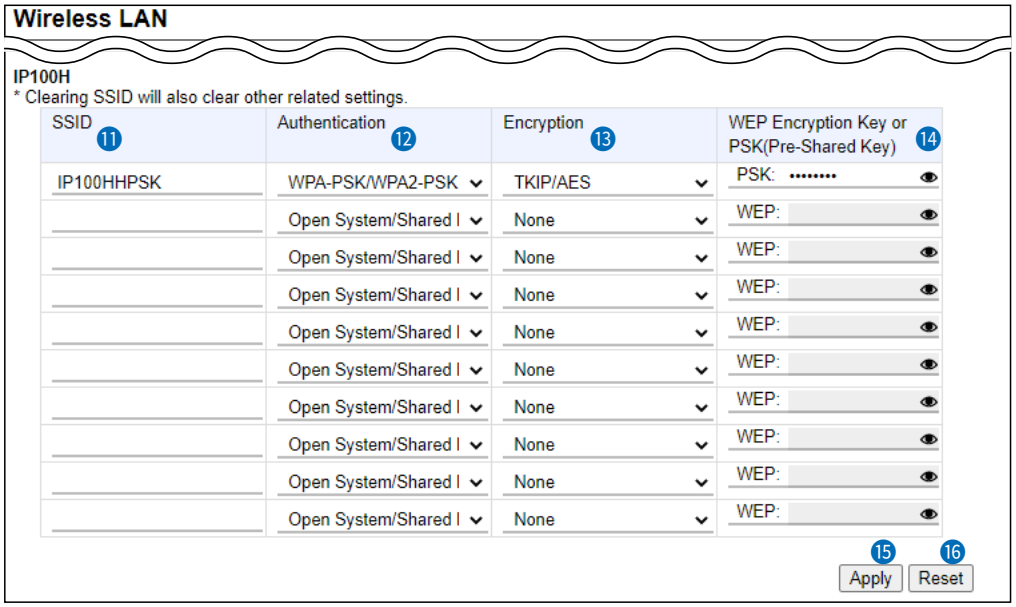

IP100H (Continued)

⑭ WEP Encryption Key or PSK (Pre-Shared Key) ……

- **WEP Encryption Key**

  Enter the encryption key that is the same as that of the wireless access point.



ⓘ This option can be selected when [Authentication] (⑫) is set to “Open System” or “Open System/Shared Key.”

ⓘ Enter hexadecimal numbers with numbers (0 to 9) and letters (A to F). Or enter ASCII characters. The key length is same as the displayed digits, 10 or 26 using hexadecimal numbers, or half of the displayed digits, 5 or 13 characters using ASCII characters.

ⓘ The entered characters are displayed as * (asterisk) or ● (black circle.) You can check the entered characters by clicking the eye icon to the right.

- **PSK (Pre-Shared Key)**

  Enter the pre-shared key that is the same as that of the wireless access point.



ⓘ This option can be selected when [Authentication] (⑫) is set to “WPA-PSK/WPA2-PSK.”

ⓘ Enter hexadecimal numbers with numbers (0 to 9) and letters (A to F). Or enter ASCII characters. The key length is 64 digits using hexadecimal number, or 8 to 63 characters using ASCII characters.

ⓘ The entered characters are displayed as * (asterisk) or ● (black circle.) You can check the entered characters by clicking the eye icon to the right.

Wireless LAN screen

Transceiver Controller > Common Settings > Wireless LAN

■ Wireless LAN

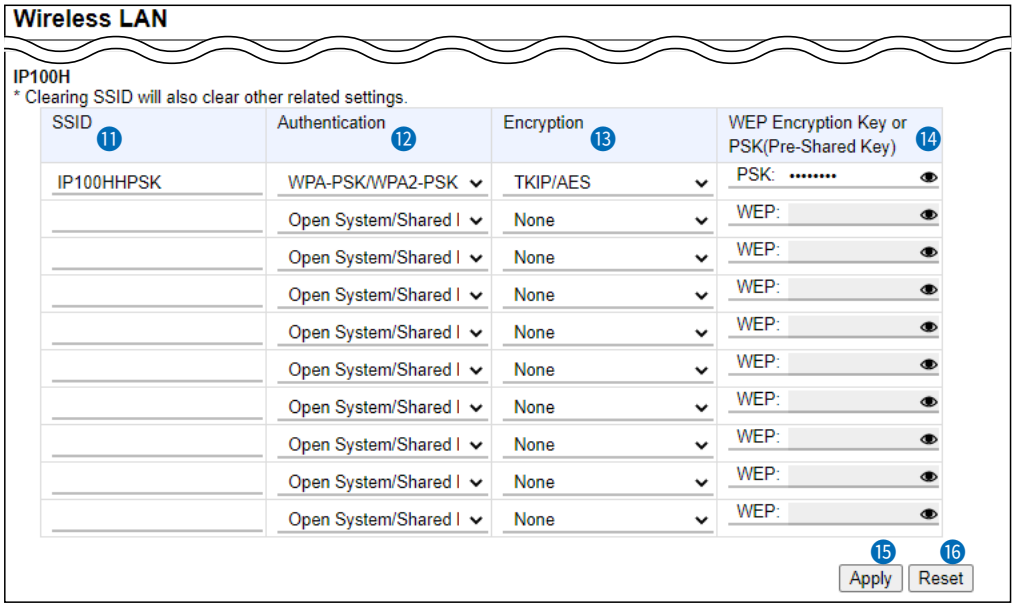

15 <Apply> ..... Click to apply the entries.
ⓘ The entries are displayed in [List of Wireless LAN Entries].

16 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Wireless LAN screen

Transceiver Controller > Common Settings > Wireless LAN

■ List of Wireless LAN Entries

Display the list of the wireless LAN settings.

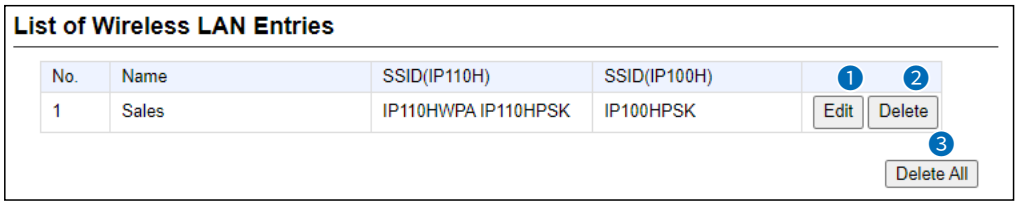

❶ **<Edit>** ..... Click to edit the entries in [Wireless LAN].

❷ **<Delete>** ..... Click to delete the selected entry.
ⓘ After clicking <Delete>, the entry cannot be recalled.

❸ **<Delete All>** ..... Click to delete all the entries.
ⓘ After clicking <Delete All>, the entries cannot be recalled.

ID List screen

Transceiver Controller > Common Settings > ID List

■ ID List Common Settings

Select an ID list that the WLAN transceivers will use.

ⓘ You can individually specify an ID list to the groups that the WLAN transceivers belong to in [Profile] on the [Common Settings] screen.

ⓘ If any entries on this screen have been changed, you must reboot the WLAN transceiver.

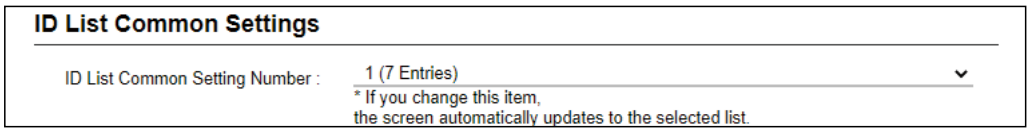

ID List Common Setting Number Select the group number between 1 and 50, and then enter IDs that the WLAN transceivers will use.

ⓘ When the group name or IDs are registered in the group, they are displayed as shown below.



Transceiver Controller > Common Settings > ID List

■ ID List Advanced Settings

Enter the group name that is selected in [ID List Common Settings].

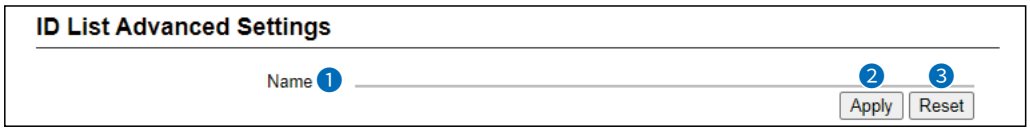

❶ Name ..... Enter a group name of up to 31 characters.
The group is selected in [ID List Common Setting] on the [ID List] screen.
When the group is selected on the [ID List] and [Profile] screens, the group name is displayed.

❷ <Apply> ..... Click to apply the entries.

❸ <Reset> ..... Click to reset the settings.

ⓘ You cannot reset after clicking <Apply>.

ID List screen

Transceiver Controller > Common Settings > ID List

■ Save or Write the ID List Setting

You can save an ID list file on your PC, or load an ID list file to the RoIP Gateway.
ⓘ If any WLAN transceiver settings have been changed, you must reboot it.

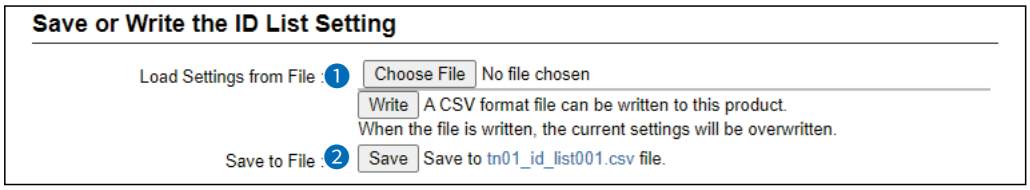

ⓘ This is an example of when Group 1 is selected in [ID List Common Setting].
When a name is registered in a group, the name is also displayed.

❶Load Settings from File … Load an ID list file, which is saved on [Save to File] (❷), to the RoIP Gateway.
Click <Choose File> to select the file to load.
Select the target file in the window, and click <Open>. The selected file is displayed in [Load Settings from File].
Click <Write> after selecting the target file. Then, the selected file is loaded to [ID List Entries].
ⓘ When the file is loaded, the previous data in [ID List Entries] is deleted.
ⓘ If you select the file that is saved on the [Settings Restore] screen in the [Management] menu, the setting is overwritten.

❷Save to File …… Save an ID list file, which is listed in [ID List Entries], to your PC.
Click <Save>, and then <Save> in the dialog to save an ID list file (a CSV file) to your PC.
ⓘ A file name varies, depending on the group number in [ID List Common Settings]. For example, the file name becomes “tn01_id_list001.csv” when Group 1 of Tenant 1 is selected.

ID List screen

Transceiver Controller > Common Settings > ID List

■ Save or Write the ID List Setting

❍ **About the rules of a CSV file for the ID list**

Icom is not responsible for writing another ID list file except a saved ID list file or an ID list file that is edited, as shown below.

Format of a CSV file for the ID list file

	A	B	C	D	E	F	G
1	#	VE-PG4	ID List Settings	ID List file			
2	#	Firm Ver.					
3	#	File Ver.					
4	#Group Name	Sales					
5	#Index	Name	Call type(indi=Individual group=Group tel=Telephone)	Destination ID	Destination Phone Number	Talkgroup	Nickname
6	1	Sales1	indi	101		0	Sales1
7	2	Sales2	indi	102		0	Sales2
8	3	Sales3	indi	103		0	Sales3

Column	Title	Description
A	Index	Group name: Up to 31 characters, No.: 1 ~ 500 Do not duplicate the number. ⓘ Only 50 destinations are saved into the IP100H, from address numbers 1 to 50.
B	Name	Up to 32 characters
C	Call Type	indi: Individual, group: Group, tel: Telephone
D	Destination ID (Individual/Group)	Up to 4 characters
E	Destination ID (Telephone)	Up to 31 digits using numbers and symbols (#, ✳)
F	Talkgroup	0: Disable, 1: Enable
G	Nickname	Up to 32 characters

ID List screen

Transceiver Controller > Common Settings > ID List

■ ID List

Enter target IDs in the group that is selected in [ID List Common Settings].
ⓘ You can enter up to 500 target IDs in each group.

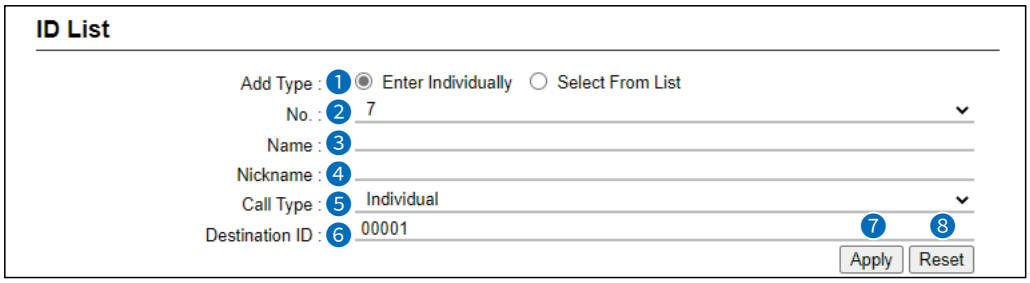

ⓘ This is an example of when “Enter individually” is selected in the “Add Type” (❶).
When a name is registered in a group, the name is also displayed.

❶Add Type ..... Select [Enter Individually] or [Select From List] in the [Add Type].
When [Select From List] is selected, the Destination IDs that are registered on the [Transceiver Registration] screen or [Destination Settings] screen, are displayed.
ⓘ By selecting [All], you can select or cancel all entries in the list.
ⓘ When [Select From List] is selected, you can enter a name of up to 32 characters.

ID List(Sales)

Add Type : ○ Enter Individually ◉ Select From List

☐ All	Name	Call Type	Destination ID/Phone Number
☐	Sales1	Individual	00101
☐	Sales2	Individual	00102
☐	Sales3	Individual	00103
☐	IP100FS	Individual	00050
☐	Group0001	Group	00001

❷No. ..... Select a number to register the destination.
Up to 500 destinations can be registered to a group.
ⓘ Only 50 destinations are saved into the IP100H, from address numbers 1 to 50.

❸Name ..... Enter a destination name of up to 32 characters.

❹Nickname ..... Enter a nickname of up to 32 characters, if necessary.

ID List screen

Transceiver Controller > Common Settings > ID List

■ ID List

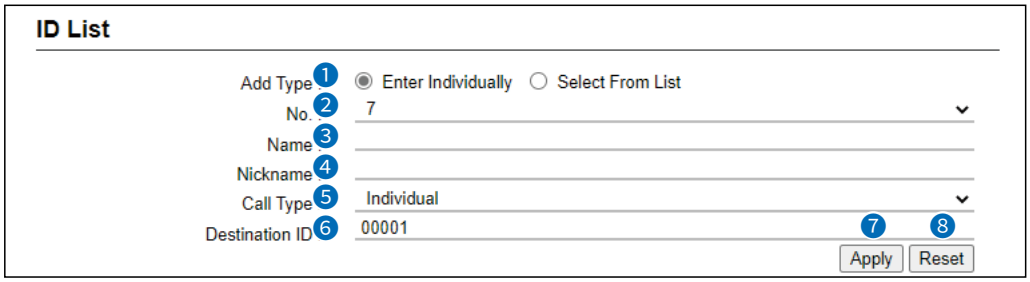

ⓘ This is an example of when “Enter individually” is selected in the “Add Type” (❶).
When a name is registered in a group, the name is also displayed.

❺ Call Type ..... Select the Call type.
Options: Individual, Group, Talkgroup, or Telephone

❻ Destination ID ..... Enter a target individual ID, group ID, or talkgroup ID (00001 ~ 60000). When “Telephone” is selected as [Call Type] (❺), enter a target phone number of up to 31 digits using numbers and symbols (#, ∗).

❼ <Apply> ..... Click to apply the entries.
ⓘ The entries are displayed in [ID List Entries].

❽ <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

ID List screen

Transceiver Controller > Common Settings > ID List

■ ID List Entries

Displays the list of entered Group Calls.

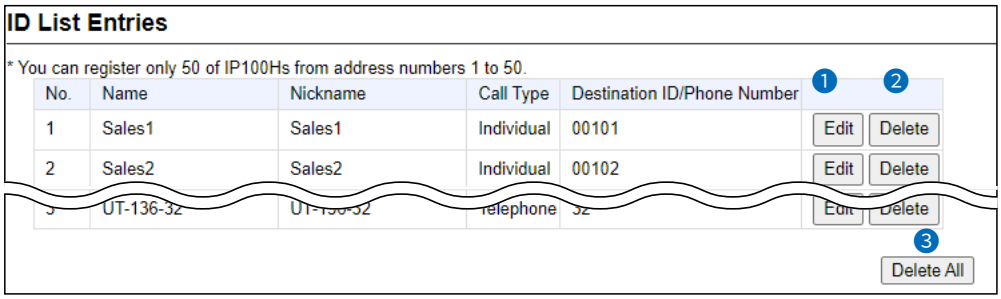

ⓘ This is an example of when Group 1 is selected in [ID List Common Settings].
When a name is registered in a group, the name is also displayed.

❶ **<Edit>** ..... Click to edit the entries in [ID List].

❷ **<Delete>** ..... Click to delete the selected entry.
ⓘ After clicking <Delete>, the entry cannot be recalled.

❸ **<Delete All>** ..... Click to delete all the entries.
ⓘ After clicking <Delete All>, the entries cannot be recalled.

Messages screen

Transceiver Controller > Common Settings > Messages

■ Message Group

Select to register a message that the WLAN transceivers will use.
ⓘ You can individually specify the message group that the WLAN transceivers belong to in “Message List” in [Profile] on the Profile screen.
(Transceiver Controller > Common Settings > Profile > Profile > Message List)
ⓘ If any entries on this screen have been changed, you must reboot the WLAN transceiver.

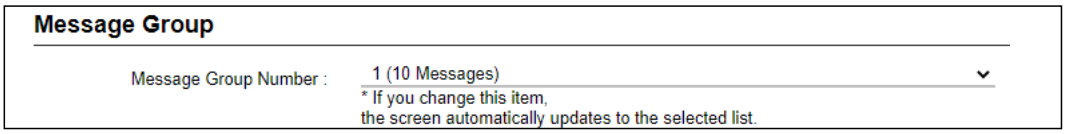

Message Group Number ..... Select a group number between 1 and 50, and then enter the messages that the WLAN transceivers will use.
ⓘ When the group name or messages are registered in the group, they are displayed as shown below.

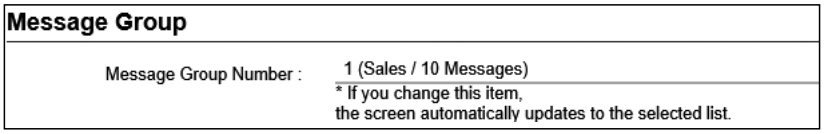

Transceiver Controller > Common Settings > Messages

■ Message Group Detail

Enter the group name that is selected in [Message Group].

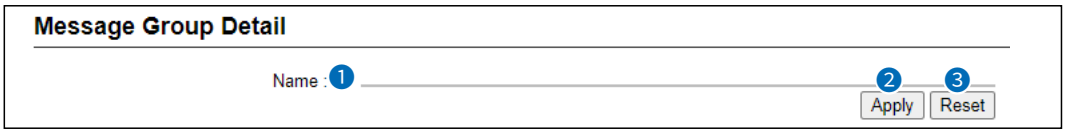

❶ Name ..... Enter a group name of up to 31 characters.
The group is selected in [Message Group] on the [Message] screen.
ⓘ When the group is selected on the [Messages] screen and [Profile] screen, the group name is displayed.

❷ <Apply> ..... Click to apply the entries.

❸ <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Messages screen

Transceiver Controller > Common Settings > Messages

■ Save or Write the Message Setting

You can save a message file on your PC, or load a message file to the RoIP Gateway.
ⓘ If any WLAN transceiver settings have been changed, you must reboot it.

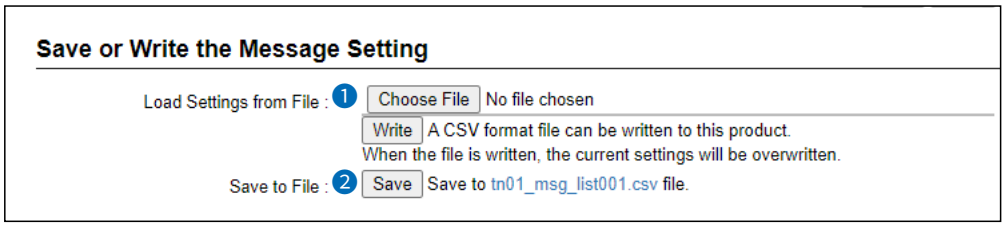

This is an example of when Group 1 is selected in [Message Group].
When a name is registered in a group, the name is also displayed.

❶ Load Settings from File … Load a message file, which is saved on “Save to File” (❷), to the RoIP Gateway.
Click <Choose File> to select the file to load.
Select the target file on screen, and click <Open>. The selected file is displayed in “Load Settings from File”. Click <Write> after selecting the target file. Then, the selected file is loaded to [Messages].
ⓘ The previous data in [Messages] is overwritten the loaded data.
ⓘ If you select the file that is saved on the Settings Restore screen in the [Management] menu, the setting is overwritten.

❷ Save to File …… Save a message file, which is listed in the [Message], to your PC.
Click <Save>, and then <Save> on the box to save a message file (a CSV file) to your PC.
ⓘ The file name varies, depending on the group number in [Message Group]. For example, the file name becomes “tn01_msg_list001.csv” when Group 1 of Tenant 1 is selected.

Messages screen

Transceiver Controller > Common Settings > Messages

■ Save or Write the Message Setting

❍ **About the rules of a CSV file for the message file**

Icom is not responsible for writing another message file except a saved message file or a message file that is edited as shown below.

Format of a CSV file for the message file

	A	B	C	D
1	#	VE-PG4	Message Settings	Message file
2	#	Firm Ver.		
3	#	File Ver.		
4	#Group Name	Sales		
5	#Index	Message		
6	1	Gather immediately.		
7	2	A message was sent.		
8	3	Check the message.		
9	4	Is it no problem?		
10	5	Give me a reply.		
11	6	Give me a reply immediately.		
12	7	Please disperse there.		
13	8	Back to the office ASAP.		
14	9	The parcel arrived.		
15	10	The work finished.		

Column	Title	Description
A	Index	Group name: Up to 31 characters, No.: 1 ~ 10 Do not duplicate the number
B	Message	Up to 32 characters

Messages screen

Transceiver Controller > Common Settings > Messages

■ Message List

Enter messages in the group that is selected in [Message Group].
You can transmit fixed message of up to 32 characters.
ⓘ You can enter up to 10 messages in each message group.

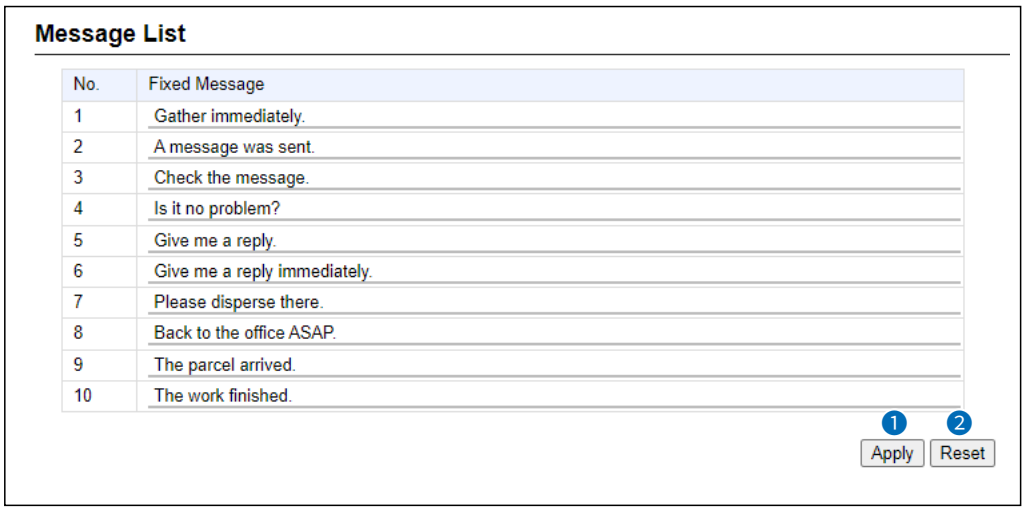

When a name is registered in a group, the name is also displayed.

❶ **<Apply>** ..... Click to apply the entries.

❷ **<Reset>** ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Status screen

Transceiver Controller > Common Settings > Status

■ Status Settings

Select to register a status that the WLAN transceivers use.
ⓘ You can program statuses of up to 32 characters. You can enter up to 10 statuses.
ⓘ If any entries on this screen have been changed, you must reboot the WLAN transceiver.

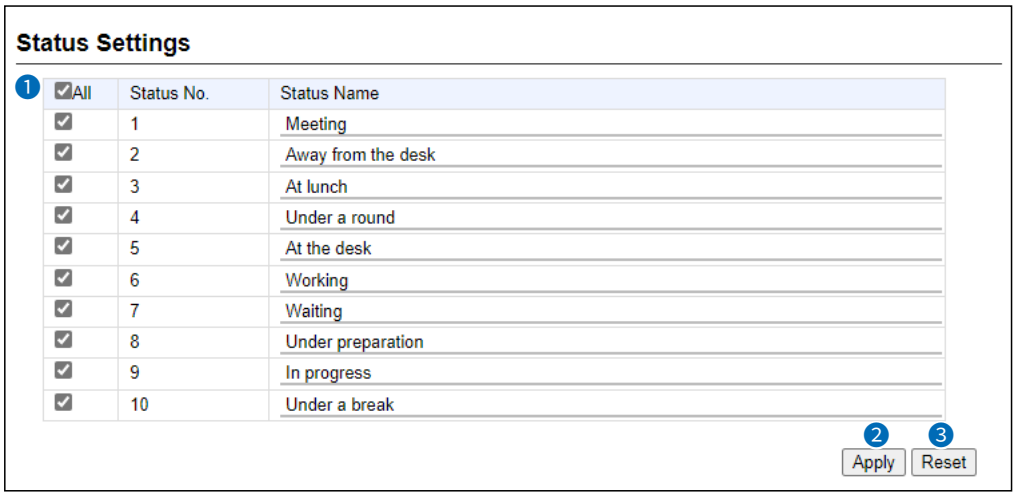

❶Check Box ..... Click a Check Box to display a status name on the WLAN transceiver.
ⓘ When the box is not checked, the status name is not displayed on the WLAN transceiver, even if you entered it.
When the status name is not entered, the status number is displayed on the WLAN transceiver only if the box is checked.
ⓘ You can check or uncheck them all at once by clicking [All].

❷<Apply> ..... Click to apply the entries.

❸<Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Profile screen

Transceiver Controller > Common Settings > Profile

■ Profile List

Display the entries that are entered in [Common Settings].

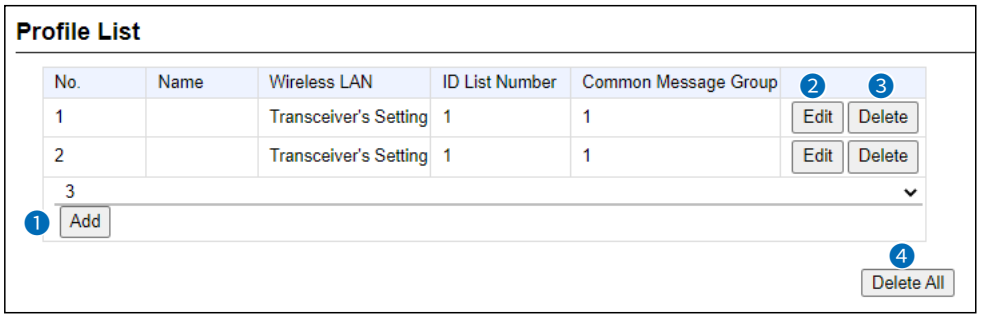

❶ **<Add>** ..... Click to add a new profile.

❷ **<Edit>** ..... Click to edit the entries in [Profile].

❸ **<Delete>** ..... Click to delete the selected entry.
ⓘ After clicking <Delete>, the entry cannot be recalled.

❹ **<Delete All>** ..... Click to delete all the entries.
ⓘ After clicking <Delete All>, the entries cannot be recalled.

Profile screen

Transceiver Controller > Common Settings > Profile

■ Profile

Individually assign an ID list, message list or receive notification tone to the group that the WLAN transceiver belongs to.
ⓘ After the setting is completed, you must reboot the WLAN transceiver.

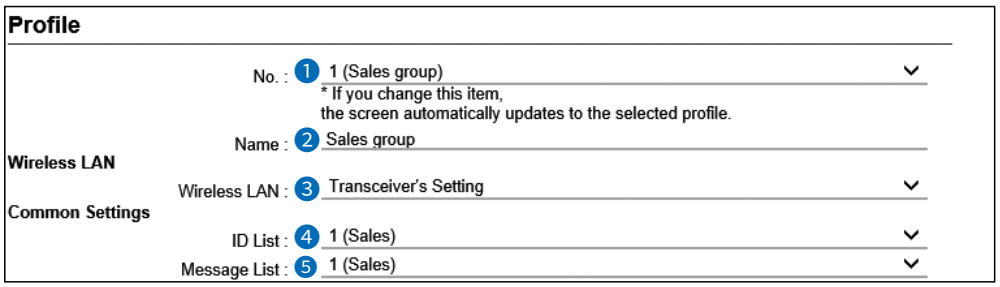

❶No. ..... Select a profile between 1 and 50, to assign to the group that WLAN transceiver belongs to.

❷Name ..... Enter a profile name of up to 31 characters.
The profile name is displayed in [Profile List] on the [Profile] screen.

❸Wireless LAN ..... Select the wireless LAN setting that is commonly used by the WLAN transceivers in the group. (Default: Transceiver's Setting)

- **Transceiver's Setting**
  Uses the last wireless LAN setting that was set by the CS-IP100H, CS-IP110H, or the RoIP Gateway.

- **1 (Name) to 20 (Name)**
  Select a number that was entered on the [Wireless LAN] screen.

❹ID List ..... Select an ID list that is commonly used by the WLAN transceivers in the group. (Default: 1)
ⓘ Select an ID number that is registered on the [ID list] screen.

❺Message List ..... Select a Message list that is commonly used by the WLAN transceivers in the group. (Default: 1)
ⓘ Select a message number that is registered in [Messages].

Profile screen

Transceiver Controller > Common Settings > Profile

■ Profile

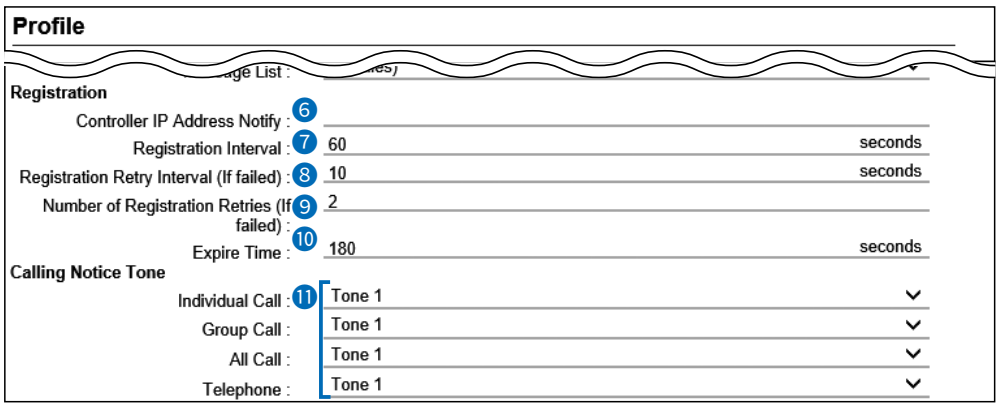

6 Controller IP Address Notify

Enter the IP address or host name of the controller that is selected as the server of WLAN transceiver.
Enter an IP address or host name of up to 63 characters.
ⓘ If you use the RoIP Gateway as a server, you must not set this item.

7 Registration Interval .....

Enter the transmit interval for the registration information that the WLAN transceivers will use. (Default: 60)
• Range: 30 ~ 300 (seconds) in 1 second steps
ⓘ Generally use the default setting.
ⓘ When the interval period is short, and a WLAN transceiver goes out of the communication area, the WLAN transceiver registration on the RoIP Gateway can be updated earlier. Therefore, if the WLAN transceiver receives an Individual call, the RoIP Gateway can quickly reply “No response” as a Target availability check.

8 Registration Retry Interval (If failed) .....

Enter a retry interval when the WLAN transceiver fails to register to the RoIP Gateway. (Default: 10)
• Range: 1 ~ 30 (seconds)

9 Number of Registration Retries (If failed) .....

Enter the number of registration retries if the WLAN transceiver fails to register to the RoIP Gateway. (Default: 2)
• Range: 1 ~ 10

10 Expire Time .....

The RoIP Gateway checks the WLAN transceivers connection status in this interval. (Default: 180)
• Range: [Registration Interval] (7) setting +1 ~ 900 (seconds)
ⓘ Generally use the default setting.
ⓘ You cannot set this setting to shorter than the [Registration Interval] (7) setting.

11 Calling Notice Tone .....

Select a notice tone for calling. (Default: Tone 1)
• Options: Not Use, or Tone 1 ~ Tone 8
ⓘ This tone can be individually assigned to each call type, “Individual Call,” “Group Call,” “All Call,” and “Telephone.”

Profile screen

Transceiver Controller > Common Settings > Profile

■ Profile

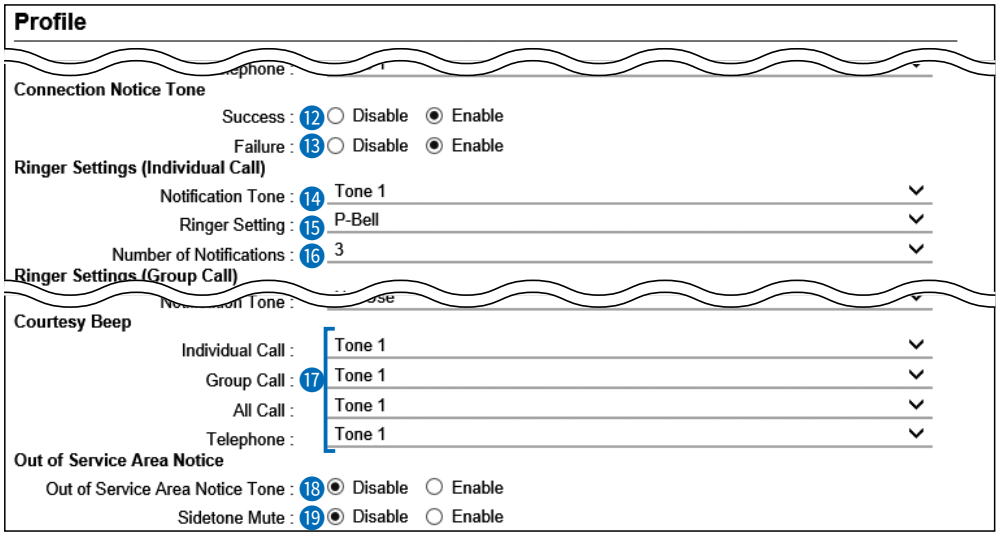

⑫ Success ..... Select a notice tone for a successful connection. (Default: Enable)

ⓘ When an Individual call, Message call, Status call or telephone call connection is successful, the Notice Tone sounds.

ⓘ When [Target Availability Check] on the [Transceiver Settings] screen is set to “Disable,” the Notice Tone will not sound.

⑬ Failure ..... Select a notice tone for connection failure. (Default: Enable)

ⓘ When an Individual call, Message call, Status call or telephone call connection fails, the Notice Tone sounds.

ⓘ When [Target Availability Check] on the [Transceiver Settings] screen is set to “Disable,” the Notice Tone will not sound.

⑭ Notification Tone ..... Select a notice tone when a call is received. (Default: Not Use)

• Options: Not Use, or Tone 1 ~ Tone 8

ⓘ This tone can be individually assigned to each call type, “Individual Call,” “Group Call,” “All Call,” “Telephone,” and “Message.”

Profile screen

Transceiver Controller > Common Settings > Profile

■ Profile

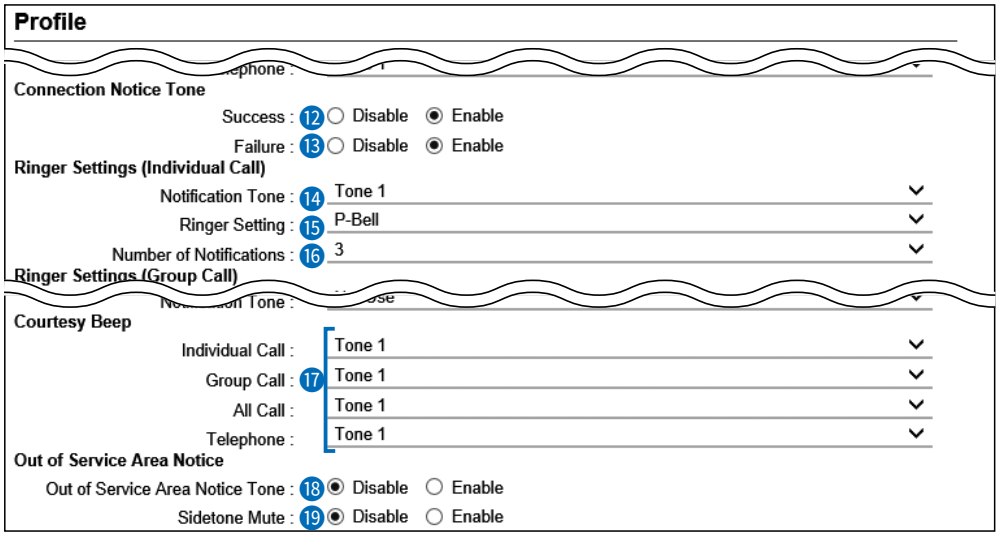

⓯ Ringer Setting…… Select a notice type between “Pocket Beep” and “P-Bell.” (Default: P-Bell)

ⓘ This item can be selected when [Notification Tone] (⓮) is set to “Tone 1” to “Tone 8.”

ⓘ You cannot select this item for a Message call.

- **Pocket Beep**
  When a specified call is received, the WLAN transceiver sounds the Notification Tone, and the notification icon blinks.

- **P-Bell**
  When a specified call is received, the WLAN transceiver sounds the Notification Tone.
  The received audio is muted until you reply to the call.

ⓘ After pushing [PTT] on the WLAN transceiver, the mute will be released.
(Example: IP100H)



When the Pocket Beep is active



When the P-Bell is ON

⓰ Number of Notifications … Select a notification number of “Continuous.” (Default: 3)

- Options: 1, 3, 10, or 20

ⓘ You can select this item when [Notification Tone] (⓮) is set to “Tone 1” to “Tone 8.”

ⓘ You cannot select this item for a Message call.

Profile screen

Transceiver Controller > Common Settings > Profile

■ Profile

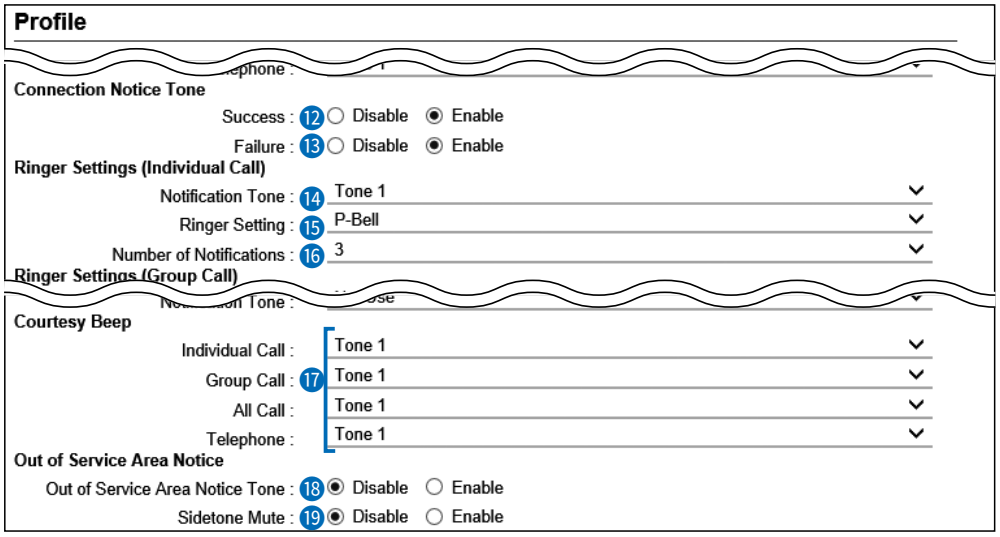

⑰ Courtesy Beep ..... Select a Notice Tone when a received call is finished. (Default: Tone 1)

- ⓘ This tone can be individually assigned to each call type, “Individual Call,” “Group Call,” “All Call,” and “Telephone.”
- ⓘ You can select “Not Use” or “Tone 1” to “Tone 8.”
- ⓘ After each received call is completed, the WLAN transceiver will sound the specified tone.

⑱ Out of Service Area Notice Tone ..... Select whether or not the WLAN transceiver sounds the Out of Service Area Notice Tone. (Default: Disable)
When “Enable” is selected, the WLAN transceiver sounds the Notice Tone when it goes out the service area or returns to the service area.

⑲ Sidetone Mute..... Select whether or not the WLAN transceiver uses the Sidetone Mute function. (Default: Disable)
When “Enable” is selected, the WLAN transceiver mutes the sidetone or monitor audio when it goes out the service area. At that time, you cannot hear your voice from a headset or earphone speaker.

- ⓘ When “Monitor” or “Sidetone” is set to “Disable” in the Transceiver Settings menu, this function is not activated.

Profile screen

Transceiver Controller > Common Settings > Profile

■ Profile

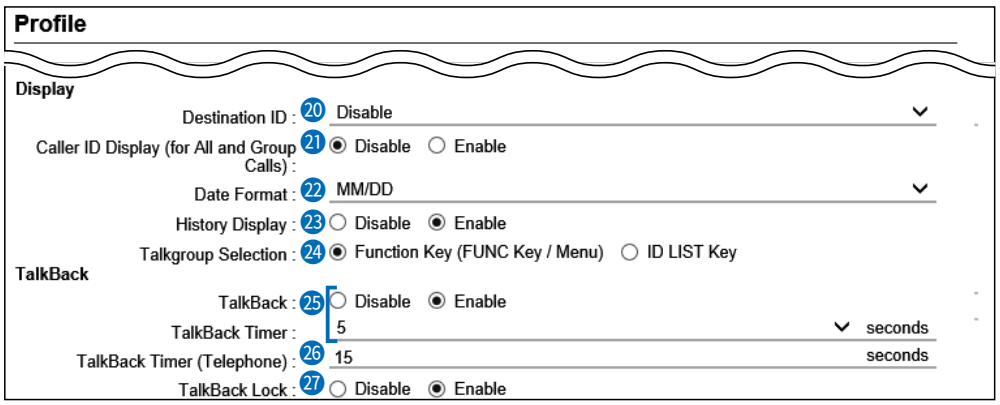

20 Destination ID ..... Select a destination ID that will be displayed after returning to the standby mode. (Default: Disable)



Destination ID (Call type)

- **Disable:** Displays the destination ID or call type that is specified in [Destination ID] on the [Transceiver Settings] screen.
- **Transmit:** Displays the IDs that the WLAN transceiver recently called.
- **Transmit and Receive:** Displays either IDs that the WLAN transceiver recently called or was called by.
- **All Operations:** Displays either IDs that the WLAN transceiver recently called, was called by or displays the ID list/ History.

21 Caller ID Display (for All and Group Calls) ... Select whether or not the WLAN transceiver displays the Caller ID in the All call or Group call. (Default: Disable)

- **Disable**: When the WLAN transceiver, RC-FS20, or IP100FS receives an All call or Group call, only the Call type is displayed.
- **Enable:** When the WLAN transceiver, RC-FS20, or IP100FS receives an All call or Group call, both Call type and Caller ID are displayed.

(Example: IP100H)

• When receiving an All Call



• When receiving an All Call Message

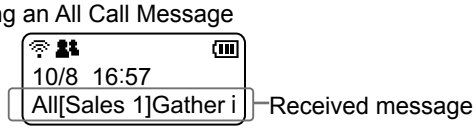

22 Date Format..... Select a date format to display on the WLAN transceiver's standby screen. (Default: MM/DD)

You can select "MM/DD," "DD/MM," "MM-DD," "DD-MM," "MM.DD," or "DD. MM." (MM: Month, DD: Day)

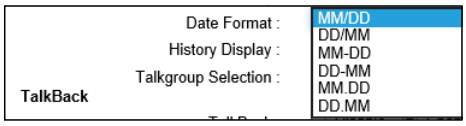

Profile screen

Transceiver Controller > Common Settings > Profile

■ Profile

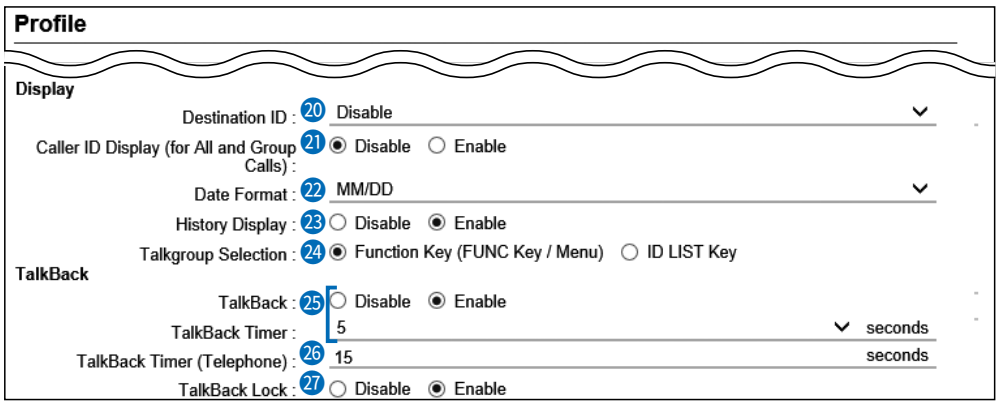

23 History Display ..... Set the call history display. (Default: Enable)

- **Disable:** Call histories are not displayed on the WLAN transceiver.
- **Enable:** Call histories are displayed on the WLAN transceiver by pushing the [ ] key on the IP100H or the menu operation on the IP110H.

24 Talkgroup Selection ..... Set the key to select the Talkgroup. (Default: Function Key (FUNC Key / Menu))

- **Function Key (FUNC Key / Menu):** Select the Talkgroup by pushing the [FUNC] key on the IP100H or the menu operation on the IP110H.
- **ID LIST Key:** Select the Talkgroup by pushing the [ ] key on the IP100H or by pushing the [CLR] on the IP110H.

25 TalkBack Timer ..... Enter a time between 1 and 30 seconds that the WLAN transceiver will return to the standby mode after a received signal disappears. (Default: 5 (seconds))

ⓘ When “Disable” is selected, the WLAN transceiver returns to the standby mode (standby screen) as soon as the status indicator goes out.

26 TalkBack Timer (Telephone) Enter a time between 0 and 600 seconds that the WLAN transceiver will return to the standby mode after a received signal from a telephone disappears. (Default: 15 (seconds))

ⓘ When “0” is selected, the TalkBack timer (Telephone) is disabled. In that case, the connection does not terminate until the telephone hangs up, or the WLAN transceiver terminates the call by pushing the [Option] key or Programmable key.

27 TalkBack Lock ..... Select whether or not the TalkBack Lock function is “Disable” or “Enable.” (Default: Enable)

- **Enable:** When another call is received in the TalkBack timer time after a call is finished and the WLAN transceiver returns to the standby mode, accepts to receive it if higher priority level call is received, or refuses if the same or lower priority level call is received than the finished call.
  After the TalkBack timer has passed, a new call can be received.
- **Disable:** Accepts to receive a new call after your current call is finished.

Profile screen

Transceiver Controller > Common Settings > Profile

■ Profile

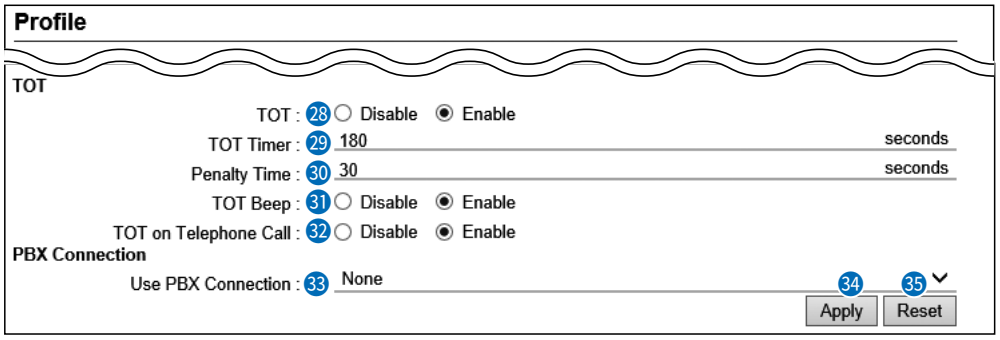

28 TOT ..... Select whether or not the WLAN transceiver uses the Time-out timer. (Default: Disable)

ⓘ When “Enable” is selected, the [TOT Timer] (29), [Penalty Timer] (30), [TOT Beep] (31), [TOT on Telephone Call] (32) are displayed.

ⓘ This function is useful when the WLAN transceiver’s PTT switch has accidentally been held down.

29 TOT Timer ..... Set the Time-out timer. The timer limits the WLAN transceiver’s continuous transmission. (Default: 180)

• Range: 11 and 600 (seconds)

ⓘ When the period of time has passed, transmitting automatically stops.

30 Penalty Time ..... Set the TOT Penalty time. After the [TOT Timer] (29) period ends, the TOT Penalty timer starts and inhibits the user from transmitting during the penalty period. (Default: 30)

• Range: 1 ~ 600 (seconds)

31 TOT Beep ..... Select whether or not the WLAN transceiver uses the TOT beep function. (Default: Enable)

ⓘ When “Enable” is selected, a beep sounds 10 seconds before the period of time that is set in the [TOT Timer] (29) ends.

Profile screen

Transceiver Controller > Common Settings > Profile

■ Profile

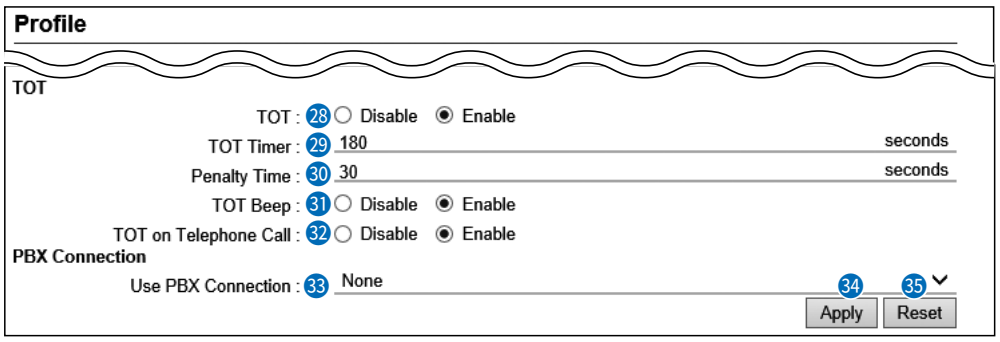

32 TOT on Telephone Call…… Select whether or not the WLAN transceiver uses the Time-out timer on Telephone Call. (Default: Enable)

ⓘ When “Disable” is set, transmitting does not stop, even if the period of time that is set in the [TOT Timer] (29) has passed during a telephone call.

33 Use PBX Connection …… When a phone number from the WLAN transceiver is not registered in the [Destination Settings], select “Transceiver Controller Telephone Connection.” (Default: None)

34 <Apply> …… Click to apply the entries.

35 <Reset> …… Click to reset the settings.

ⓘ You cannot reset after clicking <Apply>.

Profile screen

Transceiver Controller > Common Settings > Profile

■ Profile Batch Setting

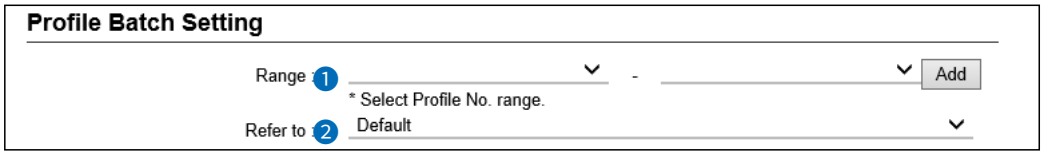

❶Range ..... Sets a range of collective Profiles.

Click <Add> to register consecutive Profiles collectively.
ⓘ If a Profile is already registered, “Overwrite the entry” is displayed.

❷Refer to..... Selects the default settings or the programmed settings to refer to.
(Default: Default)

CONNECTION PORT SETTINGS

Section 7

Digital Transceiver (D-TRX) screen 7-3
- ■ Digital Transceiver Connection 7-3
- ■ Digital Transceiver System 7-4
- ■ Digital Transceiver Connection (**System: NXDN-Trunking**) 7-5
- ■ Communication Settings (**System: NXDN-Trunking**) 7-7
- ■ Bridge Communication (**System: NXDN-Trunking**) 7-8
- ■ Digital Transceiver Connection (**System: NXDN-Conventional**) 7-9
- ■ Communication Settings (**System: NXDN-Conventional**) 7-11
- ■ Digital Transceiver Connection (**System: dPMR Mode 2**) 7-12
- ■ Communication Settings (**System: dPMR Mode 2**) 7-15
- ■ DTMF Dialing 7-16

EXT I/O (EXT) screen 7-17
- ■ EXT I/O Port Mode 7-17
- ■ EXT I/O 7-18
- ■ Transceiver Model 7-19
- ■ Transceiver Connection (**Transceiver Model: General Setting**) 7-20
- ■ Bridge Communication 7-27
- ■ Transceiver Control (**Transceiver Model: IC-SAT100**) 7-28
- ■ Transceiver Control (**Transceiver Model: General Setting**) 7-29
- ■ DTMF Dialing 7-31
- ■ PTT Control Setting 7-32
- ■ Receive Detection Setting 7-33
- ■ EXT I/O Device Connection 7-34
- ■ Bridge Communication 7-35
- ■ EXT I/O Control 7-36
- ■ EXT Input Settings 7-37
- ■ EXT Output Settings 7-44

Emergency Notification screen 7-52
- ■ Bridge Communication 7-52

Microphone (MIC) screen 7-53
- ■ Bridge Communication 7-53
- ■ Microphone Control 7-54
- ■ Microphone Input Control 7-55
- ■ Voice Output Control 7-56

RoIP Gateway screen 7-57
■ RoIP Gateway Mode 7-57
■ RoIP Gateway 7-57
■ RoIP Gateway Connection (**Mode: RoIP Gateway**) 7-58
■ RoIP Gateway Communication (**Mode: RoIP Gateway**) 7-60
■ RoIP Gateway Control (**Mode: RoIP Gateway**) 7-61
■ Transceiver Model (**Mode: Transceiver**) 7-62
■ Transceiver Connection (**Mode: Transceiver**) 7-63
■ Bridge Communication (**Mode: RoIP Gateway**) 7-64
■ Bridge Communication (**Mode: Transceiver**) 7-65
■ Transceiver Control 7-66

Digital Transceiver (D-TRX) screen

Connection Port Settings > Digital Transceiver (D-TRX)

■ Digital Transceiver Connection

Select a digital transceiver to connect to the RoIP Gateway.

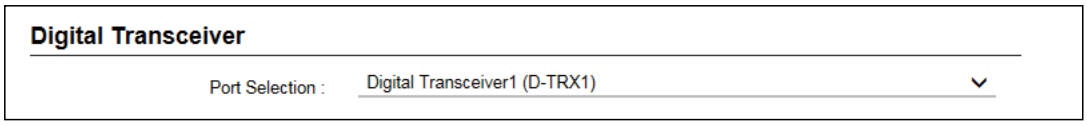

Port Selection ..... Select a Digital Transceiver port to edit the settings.
(Default: Digital Transceiver 1 (D-TRX1))

Digital Transceiver (D-TRX) screen

Connection Port Settings > Digital Transceiver (D-TRX)

■ Digital Transceiver System

Select a digital transceiver system that you want to connect the RoIP Gateway to.

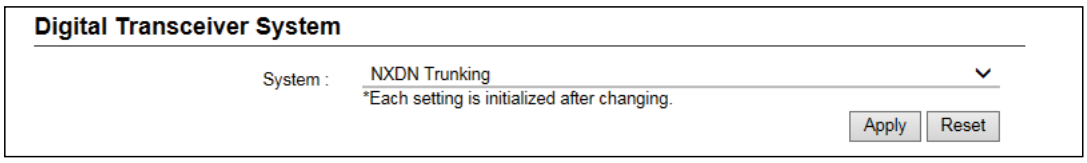

System ..... Select a digital transceiver system, and then click <Apply> to apply.
(Default: NXDN Trunking)
ⓘ The settings on this screen will be initialized after clicking <Apply>.

Digital Transceiver (D-TRX) screen

Connection Port Settings > Digital Transceiver (D-TRX)

■ Digital Transceiver Connection System: NXDN-Trunking

Edit the settings of the Digital transceiver to connect to the RoIP Gateway. You can connect a maximum of 4 digital transceivers to the network.

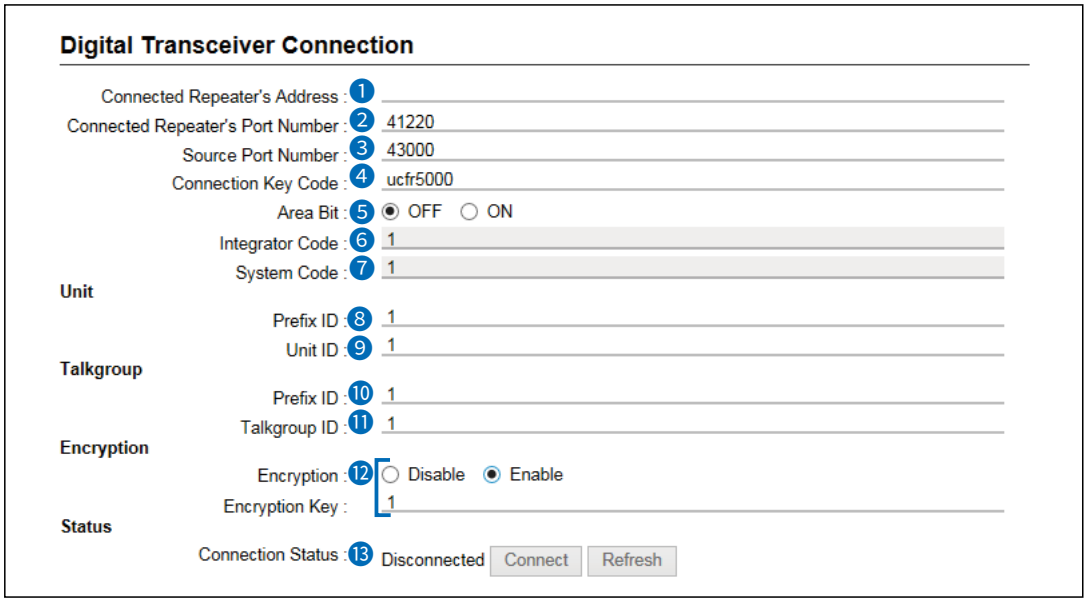

ⓘ The above screen shows an example for connecting the IC-FR5000 (with UC-FR5000 installed) to the Digital Transceiver 1 (D-TRX1).
ⓘ The above screen shows when the Encryption is set to “Enable.”

1 Connected Repeater’s Address Enter the UC-FR5000’s IP address.

2 Connected Repeater’s Port Number ..... Enter the Connection Receive Port number that is set in the UC-FR5000. Do not duplicate the other port number.
(Default: Digital Transceiver 1 (D-TRX1): 41220
Digital Transceiver 2 (D-TRX2): 41221
Digital Transceiver 3 (D-TRX3): 41222
Digital Transceiver 4 (D-TRX4): 41223)
• Range: 1 ~ 65535

3 Source Port Number ..... Enter the Local Port number that is set in the UC-FR5000. Do not duplicate the other port number.
(Default: Digital Transceiver 1 (D-TRX1): 43000
Digital Transceiver 2 (D-TRX2): 43001
Digital Transceiver 3 (D-TRX3): 43002
Digital Transceiver 4 (D-TRX4): 43003)
• Range: 1 ~ 65535

4 Connection Key Code ..... Enter the Key Code that is set in the UC-FR5000. (Default: ucfr5000)

5 Area Bit ..... Turn the Area Bit function ON or OFF, according to the UC-FR5000 setting. (Default: OFF)

6 Integrator Code ..... Displays the Integrator Code that is set in the UC-FR5000.

Digital Transceiver (D-TRX) screen

Connection Port Settings > Digital Transceiver (D-TRX)

■ Digital Transceiver Connection (System: NXDN-Trunking)

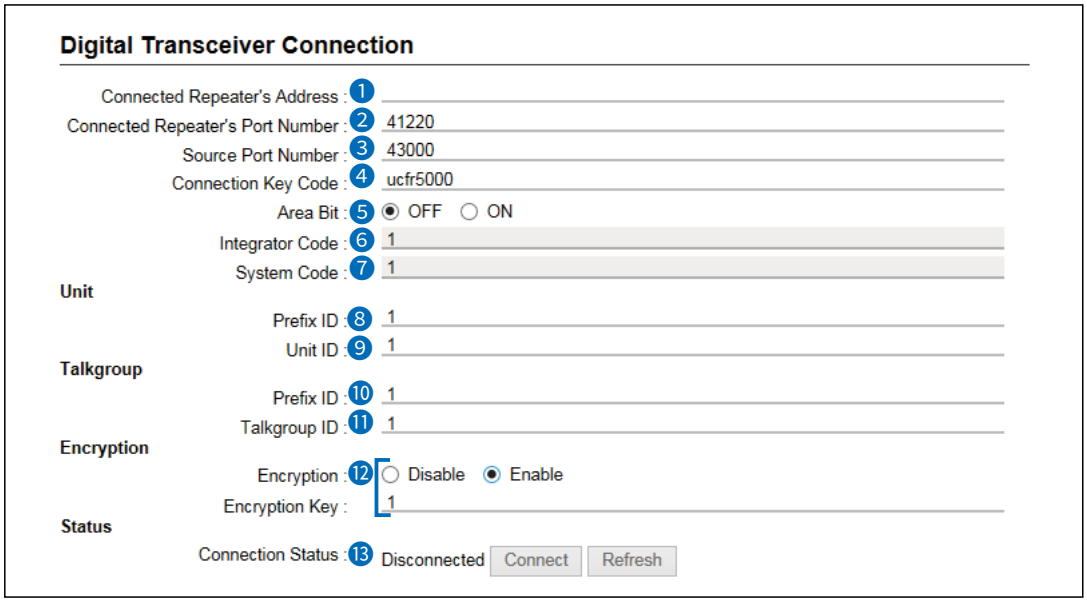

ⓘ The above screen shows an example for connecting the IC-FR5000 (with UC-FR5000 installed) to the Digital Transceiver 1 (D-TRX1).
ⓘ The above screen shows when the Encryption is set to “Enable.”

⑦ System Code ..... Displays the System Code that is set in the UC-FR5000.

⑧ Prefix ID ..... Enter the Prefix ID (for NXDN Trunking) that is set in the UC-FR5000. (Default: 1)
• Range: 1 ~ 30

⑨ Unit ID ..... Enter the Unit ID that are set in the UC-FR5000. (Default: 1)
• Range: 1 ~ 2000

⑩ Prefix ID ..... Enter the Prefix ID (for NXDN Trunking) that is set in the UC-FR5000. (Default: 1)
• Range: 1 ~ 30

⑪ Talkgroup ID ..... Enter a Talkgroup ID. (Default: 1)
• Range: 1 ~ 2000

⑫ Encryption ..... Select whether or not to enable the Encryption function. (Default: Disable)
When you enable the function, enter an encryption key between 1 and 32767. (Default: 1)

⑬ Connection Status ..... Click to connect or disconnect the transceiver, or to refresh the connection status.
ⓘ The buttons are grayed out when Connected Repeater’s Address is blank.
ⓘ The settings cannot be changed while connection is established. Click <Disconnect> before changing the settings on this screen.

Digital Transceiver (D-TRX) screen

Connection Port Settings > Digital Transceiver (D-TRX)

■ Communication Settings (System: NXDN-Trunking)

Edit the settings required for calling transceivers from the digital transceiver connected to the RoIP Gateway.

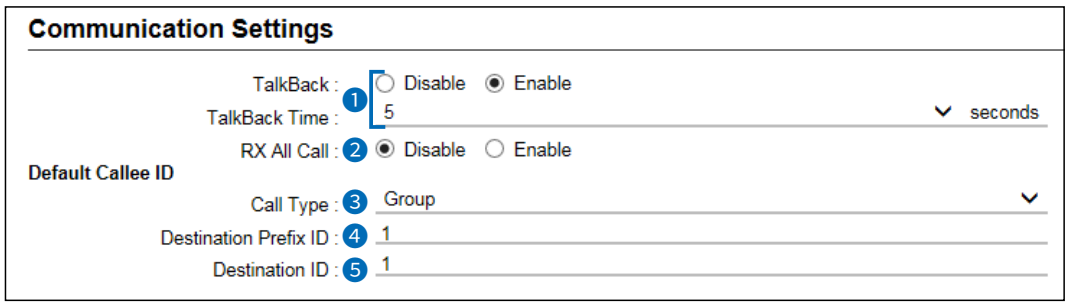

❶ TalkBack ..... Select whether or not to enable talkback from a client transceiver, when a digital transceiver connected to the RoIP Gateway has called to the client transceiver. (Default: Enable)
When the function is enabled, select the TalkBack time. (Default: 5)
• Range: 1 ~ 10 (seconds)

❷ RX All Call ..... Select whether or not to permit all Talkgroups to receive a call. (Default: Disable)

❸ Call Type ..... Select a call type to call from the transceiver, that is connected to the RoIP Gateway, to its client transceiver(s). (Default: Group)
• Options: Individual, Group, or All

❹ Destination Prefix ID ..... Enter a destination prefix ID of a client transceiver. (Default: 1)
• Range: 1 ~ 30

❺ Destination ID ..... Displayed only when the Call Type (❸) is set to “Individual” or “Group.” Enter an Individual or Group ID of the client transceiver. (Default: 1)
• Range: 1 ~ 2000.

Digital Transceiver (D-TRX) screen

Connection Port Settings > Digital Transceiver (D-TRX)

■ Bridge Communication (System: NXDN-Trunking)

Set Talkback Time for calling digital transceivers from the digital transceiver connected to the RoIP Gateway.



TalkBack Time ..... Select the TalkBack time. (Default: 5)
- Range: 1 ~ 10 (seconds)

Digital Transceiver (D-TRX) screen

Connection Port Settings > Digital Transceiver (D-TRX)

■ Digital Transceiver Connection (System: NXDN-Conventional)

Edit the settings of the digital transceiver to connect to the RoIP Gateway. You can connect a maximum of 4 digital transceivers to the network.

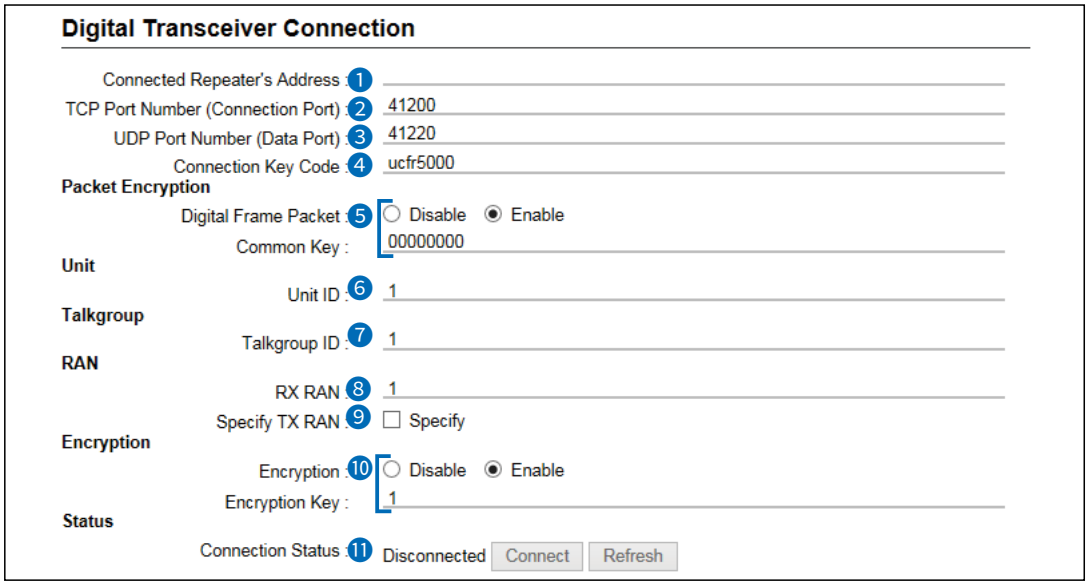

ⓘ The above screen shows an example for connecting the IC-FR5000 (with UC-FR5000 installed) to the Digital transceiver 1 (D-TRX1).
ⓘ The above screen shows when the Digital Frame Packet (5) and Scrambler (11) are set to "enabled," and Specify TX CC (10) is checked.

1 Connected Repeater's Address Enter the UC-FR5000's IP address.

2 TCP Port Number (Connection Port) ..... Enter the Connection Receive Port number that is set in the UC-FR5000. Do not duplicate the other port number.
(Default: Digital Transceiver 1 (D-TRX1): 41200
Digital Transceiver 2 (D-TRX2): 41201
Digital Transceiver 3 (D-TRX3): 41202
Digital Transceiver 4 (D-TRX4): 41203)
• Range: 1024 ~ 65535

3 UDP Port Number (Data Port) ..... Enter the Data Receive Port number that is set in the UC-FR5000. Do not duplicate the other port number.
(Default: Digital Transceiver 1 (D-TRX1): 41220
Digital Transceiver 2 (D-TRX2): 41221
Digital Transceiver 3 (D-TRX3): 41222
Digital Transceiver 4 (D-TRX4): 41223)
• Range: 1024 ~ 65535

4 Connection Key Code ..... Enter the Key Code that is set in the UC-FR5000. (Default: ucfr5000)

5 Digital Frame Packet ..... Select whether or not to enable the Packet Encryption function, according to the UC-FR5000 setting. (Default: Disable)
When you enable the function, enter an 8 digit Common key.
(Default: 00000000)

Digital Transceiver (D-TRX) screen

Connection Port Settings > Digital Transceiver (D-TRX)

■ Digital Transceiver Connection (System: NXDN-Conventional)

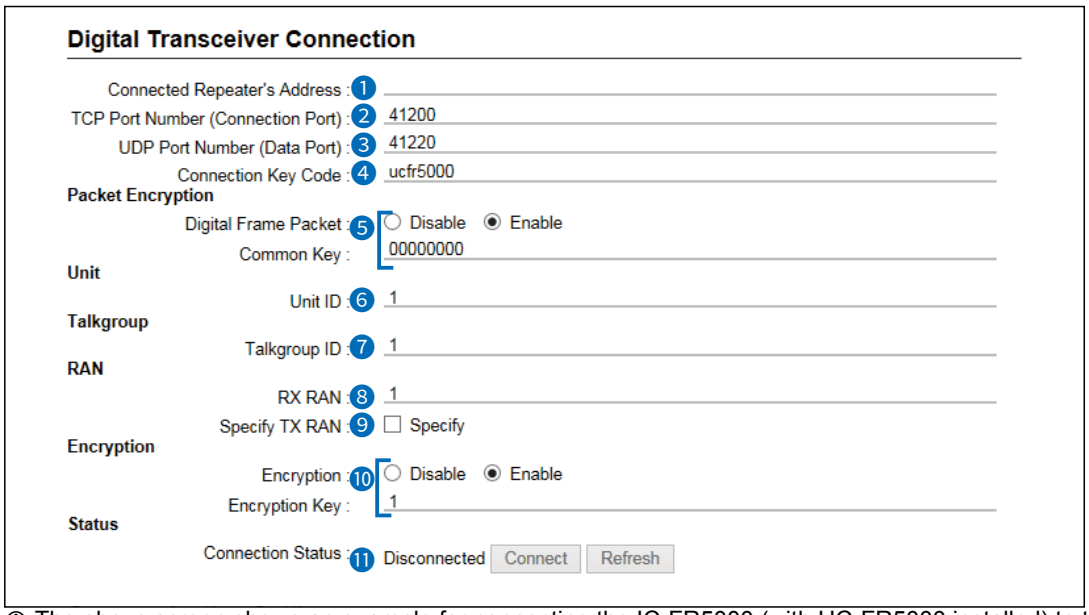

ⓘ The above screen shows an example for connecting the IC-FR5000 (with UC-FR5000 installed) to the Digital transceiver 1 (D-TRX1).
ⓘ The above screen shows when the Digital Frame Packet (❺) and Encryption (❿) are set to “Enable.”

❻ Unit ID ..... Enter a unit ID. (Default: 1)
• Range: 1 ~ 65519

❼ Talkgroup ID ..... Enter a Talkgroup ID. (Default: 1)
• Range: 1 ~ 65519

❽ RX RAN ..... Enter an RX RAN code. (Default: 1)
• Range: 0 ~ 63

❾ Specify TX RAN ..... Check to separately enter the TX RAN. (Default: Unchecked)
When checked, enter a TX RAN code between 0 and 63. (Default: 1)

❿ Encryption ..... Select whether or not to enable the Encryption function. (Default: Disable)
When you enable the function, enter an Encryption key between 1 and 32767. (Default: 1)

⓫ Connection Status ..... Click to connect or disconnect the transceiver, or to refresh the connection status.
ⓘ The buttons are grayed out when Connected Repeater’s Address is blank.
ⓘ The settings cannot be changed while connection is established. Click <Disconnect> before changing the settings on this screen.

Digital Transceiver (D-TRX) screen

Connection Port Settings > Digital Transceiver (D-TRX)

■ Communication Settings System: NXDN-Conventional

Edit the settings required for calling transceivers from the digital transceiver connected to the RoIP Gateway.

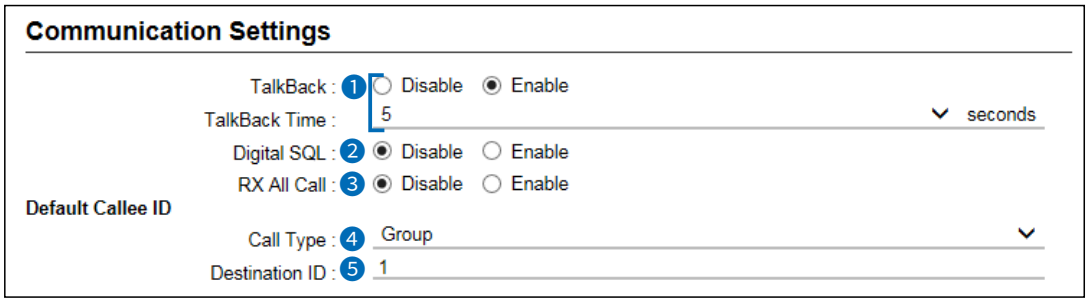

❶ TalkBack ..... Select whether or not to enable the TalkBack function. (Default: Enable)
When the TalkBack function is ON, Select the TalkBack Time.
• Range: 1 ~ 10 seconds (Default: 5)

❷ Digital SQL ..... Select whether or not to enable the Digital Squelch function.
(Default: Disable)

❸ RX All Call ..... Select whether or not to permit all Talkgroups to receive a call.
(Default: Disable)

❹ Call Type ..... Select a call type. (Default: Group)
• Options: Individual, Group, or All

❺ Destination ID ..... Enter a destination ID. (Default: 1)
• Range: 1 ~ 65519.

Digital Transceiver (D-TRX) screen

Connection Port Settings > Digital Transceiver (D-TRX)

■ Digital Transceiver Connection System: dPMR Mode 2

Configure the digital transceiver to connect to the RoIP Gateway. You can connect maximum of 4 digital transceivers through the network.

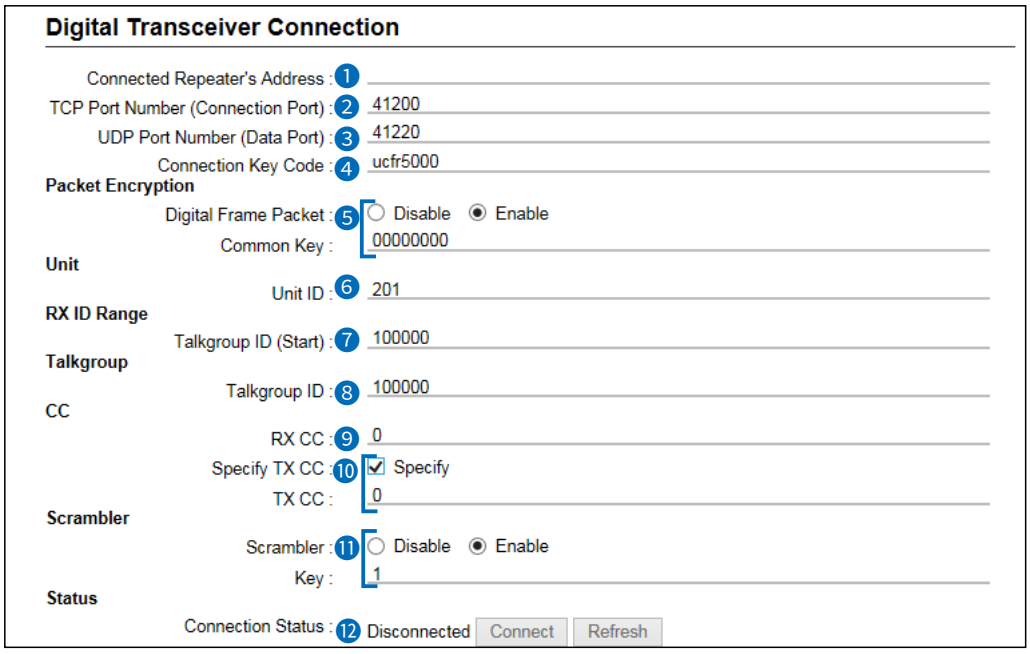

ⓘ The above screen shows an example for connecting the IC-FR5000 (with UC-FR5000 installed) to Digital Transceiver 1 (D-TRX1).

ⓘ The above screen shows when the Digital Frame Packet (❺) and Scrambler (⓫) are set to "Enable," and Specify TX CC (❿) is checked.

❶ Connected Repeater's Address Enter the UC-FR5000's IP address.

❷ TCP Port Number (Connection Port) ..... Enter the Connection Receive Port number that is set in the UC-FR5000. Do not duplicate the other port number.

(Default: Digital Transceiver 1 (D-TRX1): 41200
Digital Transceiver 2 (D-TRX2): 41201
Digital Transceiver 3 (D-TRX3): 41202
Digital Transceiver 4 (D-TRX4): 41203)

• Range: 1 ~ 65535

❸ UDP Port Number (Data Port) ..... Enter the Data Receive Port number that is set in the UC-FR5000. Do not duplicate the other port number.

(Default: Digital Transceiver 1 (D-TRX1): 41220
Digital Transceiver 2 (D-TRX2): 41221
Digital Transceiver 3 (D-TRX3): 41222
Digital Transceiver 4 (D-TRX4): 41223)

• Range: 1 ~ 65535

❹ Connection Key Code ..... Enter the Key Code that is set in the UC-FR5000. (Default: ucfr5000)

Digital Transceiver (D-TRX) screen

Connection Port Settings > Digital Transceiver (D-TRX)

■ Digital Transceiver Connection (System: dPMR Mode 2)

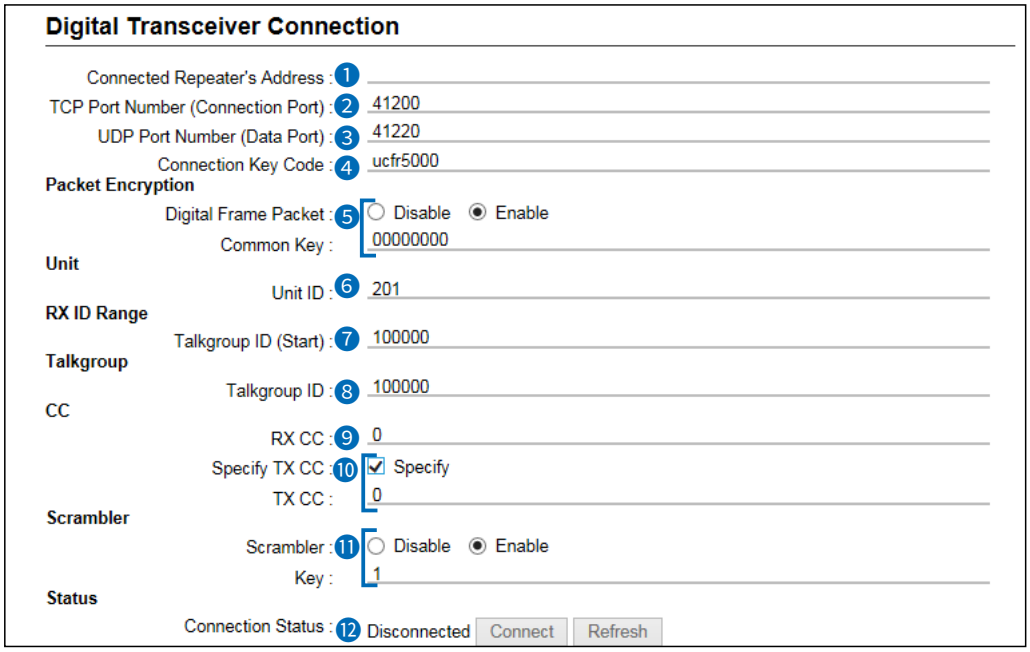

ⓘ The above screen shows an example for connecting the IC-FR5000 (with UC-FR5000 installed) to Digital Transceiver 1 (D-TRX1).

ⓘ The above screen shows when the Digital Frame Packet (❺) and Scrambler (⓫) are set to “Enable,” and Specify TX CC (❿) is checked.

❺ Digital Frame Packet ..... Select whether or not to enable the Packet Encryption function, according to the UC-FR5000 setting. (Default: Disable)
When you enable the function, enter an 8 digit Common key. (Default: 00000000)

❻ Unit ID ..... Enter a unit ID. (Default: Digital Transceiver (D-TRX1): 201, Digital Transceiver (D-TRX2): 202, Digital Transceiver (D-TRX3): 203, Digital Transceiver (D-TRX4): 204)
• Range: 1 ~ 9999999

❼ Talkgroup ID (Start) ..... Enter a Talkgroup start ID. (Default: 100000)
• Range: 1 ~ 9999999

❽ Talkgroup ID ..... Enter a Talkgroup ID. (Default: 100000)
• Range: 1 ~ 9999999

❾ RX CC ..... Enter a CC for receiving. (Default: 0)
• Range: 0 ~ 63

❿ Specify TX CC ..... Check to separately enter the TX CC. (Default: Unchecked)
When checked, enter a TX CC code between 0 and 63. (Default: 0)
ⓘ Do not duplicate the RX CC.

Digital Transceiver (D-TRX) screen

Connection Port Settings > Digital Transceiver (D-TRX)

■ Digital Transceiver Connection (System: dPMR Mode 2)

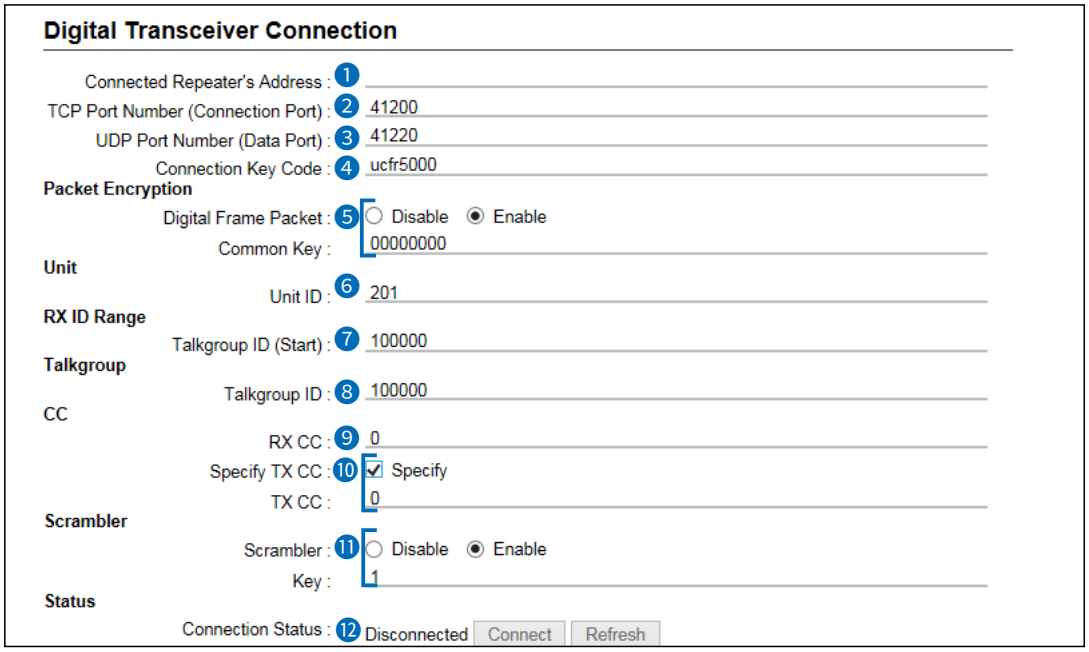

ⓘ The above screen shows an example for connecting the IC-FR5000 (with UC-FR5000 installed) to the Digital transceiver 1 (D-TRX1).

ⓘ The above screen shows when the Digital Frame Packet (5) and Scrambler (11) are set to “Enable,” and Specify TX CC (10) is checked.

11 Scrambler ..... Check to enable the Scrambler function . (Default: Disable)
When checked, enter a scrambler key between 1 and 32767. (Default: 1)

12 Connection Status ..... Click to connect or disconnect the transceiver, or to refresh the connection status.

ⓘ The buttons are grayed out when Connected Repeater’s Address is blank.

ⓘ The settings cannot be changed while connection is established. Click <Disconnect> before changing the settings on this screen.

Digital Transceiver (D-TRX) screen

Connection Port Settings > Digital Transceiver (D-TRX)

■ Communication Settings System: dPMR Mode 2

Edit the settings required for calling transceivers from the digital transceiver connected to the RoIP Gateway.

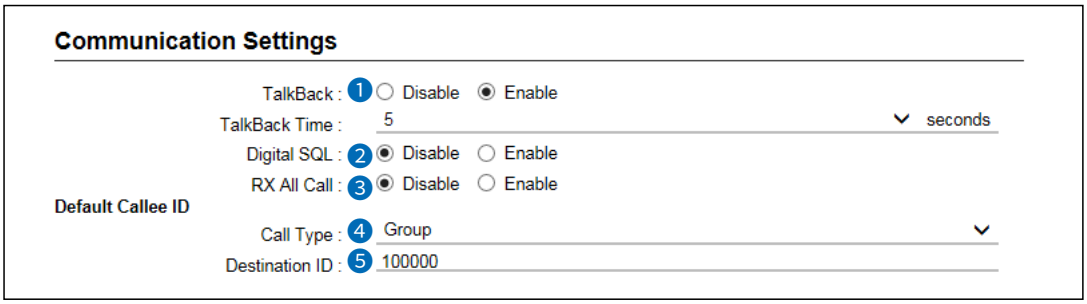

❶ TalkBack ..... Select whether or not to enable the TalkBack function. (Default: Disable)
When the TalkBack function is ON, Select the TalkBack time.
(Default: 5)
• Range: 1 ~ 10 seconds

❷ Digital SQL ..... Select whether or not to enable the Digital Squelch function.
(Default: Disable)

❸ RX All Call ..... Select whether or not to permit all Talkgroups to receive a call.
(Default: Disable)

❹ Call Type ..... Select a call type. (Default: Group)
• Options: Individual, Group, or All

❺ Destination ID ..... Enter a destination ID. (Default: 100000)
• Range: 1 ~ 9999999

Digital Transceiver (D-TRX) screen

Connection Port Settings > Digital Transceiver (D-TRX)

■ DTMF Dialing

Edit the details on DTMF Dialing.

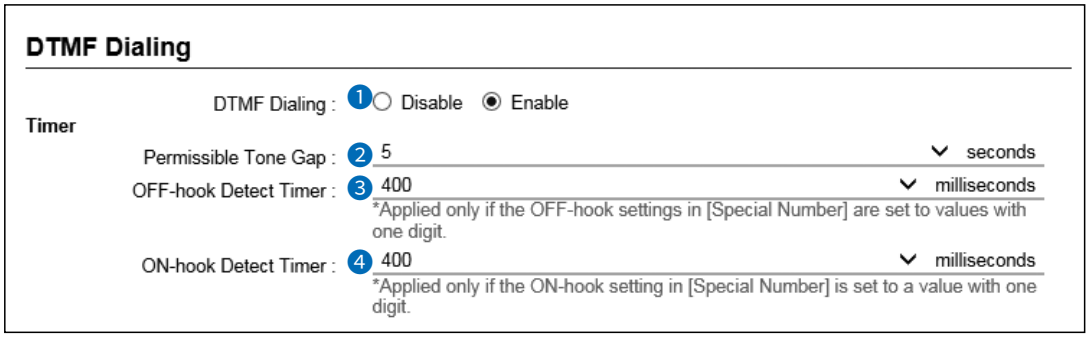

ⓘ The screen above shows when “DTMF Dialing” (❶) is set to “Enable.”

❶ DTMF Dialing ..... Select “Enable” to use DTMF signaling.
If enabled, set the details in the Timer. (Default: Disable)

❷ Permissible Tone Gap ... Select the period of time to detect that the last digit has been input. (Default: 5)

- Range: 1~10 (seconds)

❸ OFF-hook Detect Timer ... Select the period of time to detect the OFF-hook control signal. (Default: 400)

- Range: 0~2000 (milliseconds) in 100 millisecond steps

❹ ON-hook Detect Timer ..... Select the period of time to detect the ON-hook control signal. (Default: 400)

- Range: 0~2000 (milliseconds) in 100 millisecond steps

ⓘ ❸ and ❹ are the timers for the Transceiver Special Number. (PBX > Special Number > Transceiver Special Number)

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ EXT I/O Port Mode

Select the type of device, and then select its input/output mode of the EXT1 ~ EXT4 ports.

NOTE: If you change an EXT I/O Port Mode, the settings on this screen will be initialized.

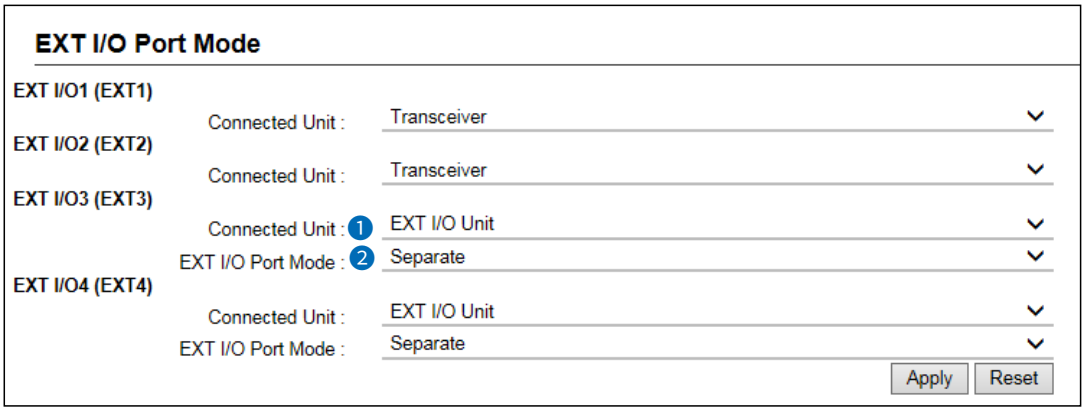

❶ Connected Unit ..... Select the type of device to connect to the EXT ports.
(Default for EXT I/O 1 (EXT1): Transceiver
Default for EXT I/O 2 (EXT2): Transceiver
Default for EXT I/O 3 (EXT3): EXT I/O Unit
Default for EXT I/O 4 (EXT4): EXT I/O Unit)

❷ EXT I/O Port Mode ..... When “EXT I/O Unit” is selected, select the EXT input/output mode.
(Default: Separate)

- **Separate**: Separately controls the external audio input/output.
- **Combined**: Simultaneously controls the external audio input/output to and from an external device. Select this option to connect an external device to A1/A2 (Audio output) and A3/A4 (Audio input) terminals.

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ EXT I/O

Select an External I/O port on the RoIP Gateway to edit the settings.

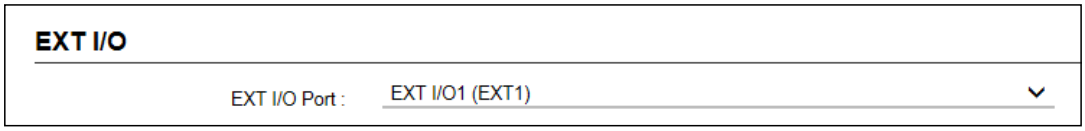

EXT I/O Port ..... Select an External I/O Port to edit the settings.
(Default: EXT I/O (EXT1))

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ Transceiver Model

This item is displayed when “Transceiver” is selected as a connected unit.
(Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode > EXT I/O 1 ~ 4 > Connected Unit)
(Connection Port Settings > EXT I/O (EXT) > EXT I/O > EXT I/O Port)

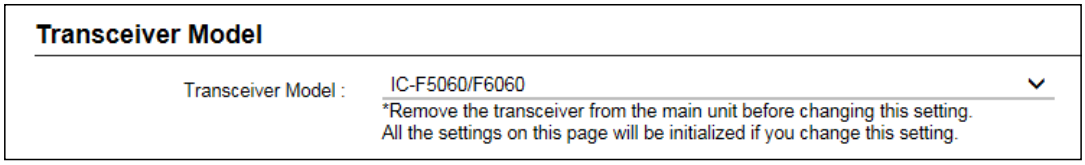

Transceiver Model …… Select a transceiver to connect the port selected in “EXT I/O Port.”
(Default: IC-F5060/F6060)

- ⓘ Select “General Setting,” if the transceiver requires detailed settings.
- ⓘ Follow the local laws and regulations when using transceivers other than the options.
- ⓘ Remove the transceiver from the RoIP Gateway to change the Transceiver Model. All settings will be reset to the defaults.

NOTE: Select “IDAS Mobile with ACC Connector” to connect the following model to the RoIP Gateway through the D-Sub 25-pin serial connector of the transceiver:
- IC-F5060/IC-F6060 series
- IC-F5330D/IC-F6330D (An optional OPC-2078 ACC CABLE is required.)

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ Transceiver Connection (Transceiver Model: General Setting)

• This item is displayed when “Transceiver” is selected as a connected unit.
(Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode)
(Connection Port Settings > EXT I/O (EXT) > EXT I/O > EXT I/O Port)

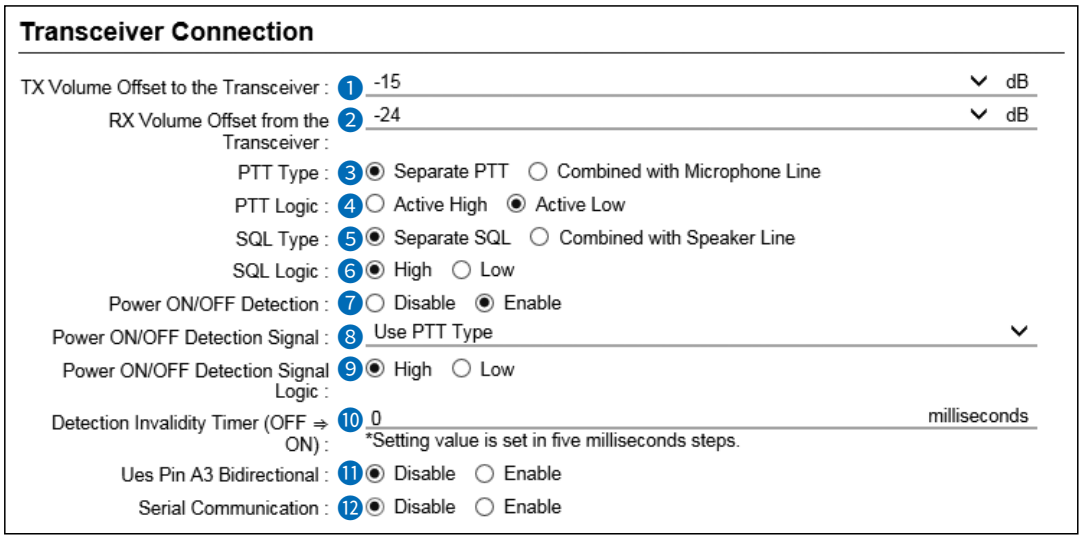

ⓘ ❽ ~ ❿ are displayed only when Power ON/OFF Detection (❼) is set to “Enable.”

❶ TX Volume Offset to the Transceiver .....

Adjust the RoIP Gateway’s transmitting audio level that is sent to the connected transceiver. (Default: –15)
• Range: –43 ~ +20 (dB)
ⓘ A higher level makes the microphone more sensitive to a small voice, and is suitable for a quiet environment.
A lower level makes the microphone less sensitive to the voice, and is suitable for a noisy environment with a louder voice.

❷ RX Volume Offset from the Transceiver .....

Adjust the RoIP Gateway’s audio level from the transceiver. (Default: –24)
• Range: –74 ~ +21 (dB)

❸ PTT Type .....

Select the PTT circuit type. (Default: Separate PTT)
• **Separate PTT**: The microphone line and PTT input line are separated.
• **Combined with Microphone Line**: The PTT input line is superimposed on the MIC input (A1 terminal).

❹ PTT Logic .....

Select the PTT logic. (Default: Active Low)
• **Active High**: PTT line becomes “High” when [PTT] is pushed. (Active High)
• **Active Low**: PTT line becomes “Low” when [PTT] is pushed. (Active Low)

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ Transceiver Connection (Transceiver Model: General Setting)

These items are displayed when “Transceiver” is selected as a connected unit.
(Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode > EXT I/O 1 ~ 4 > Connected Unit)
(Connection Port Settings > EXT I/O (EXT) > EXT I/O > EXT I/O Port)

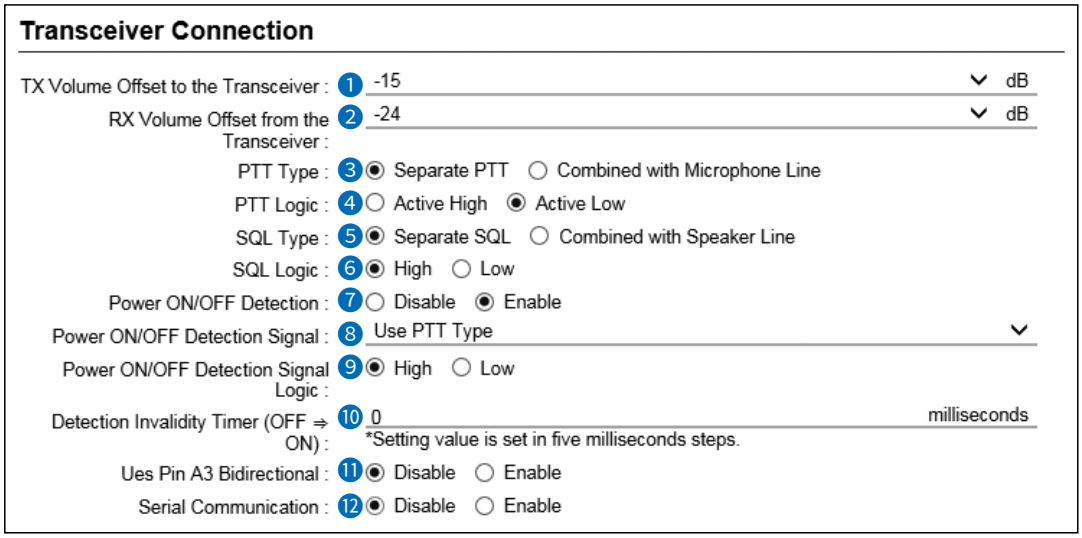

ⓘ ❽ ~ ❿ are displayed only when Power ON/OFF Detection (❼) is set to “Enable.”

❺ SQL Type ..... Select the squelch signal type. (Default: Separate SQL)

- **Separate SQL**: The squelch signal is separately input.
- **Combined with Speaker Line**: The squelch signal is superimposed on the speaker input line (A3 terminal).

❻ SQL Logic ..... Select the squelch detection type. (Default: High)

- **High**: The squelch line becomes “High” while receiving a signal. (Active High)
- **Low**: The squelch line becomes “Low” while receiving a signal. (Active Low)

❼ Power ON/OFF Detection Select “Enable” to detect the transceiver’s power status (ON/OFF). (Default: Disable)

❽ Power ON/OFF Detection Signal ..... Select the PTT type to detect the transceiver’s power status (ON/OFF). (Default: Use PTT Type)

- **Separate PTT**: The microphone line and PTT input line are separated.
- **Combined with Microphone Line**: The PTT input line is superimposed on the MIC input (A1 terminal).
- **Use PTT Type**: The PTT type selected in PTT Type (❸) is used.

❾ Power ON/OFF Detection Signal Logic ..... Select the logic to detect the transceiver’s power status (ON/OFF). (Default: High)

- **High**: Becomes High when the transceiver’s power is ON. (Active high)
- **Low**: Becomes Low when the transceiver’s power is ON. (Active low)

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ Transceiver Connection (Transceiver Model: General Setting)

These items are displayed when “Transceiver” is selected as a connected unit.
(Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode > EXT I/O 1 ~ 4 > Connected Unit)
(Connection Port Settings > EXT I/O (EXT) > EXT I/O > EXT I/O Port)

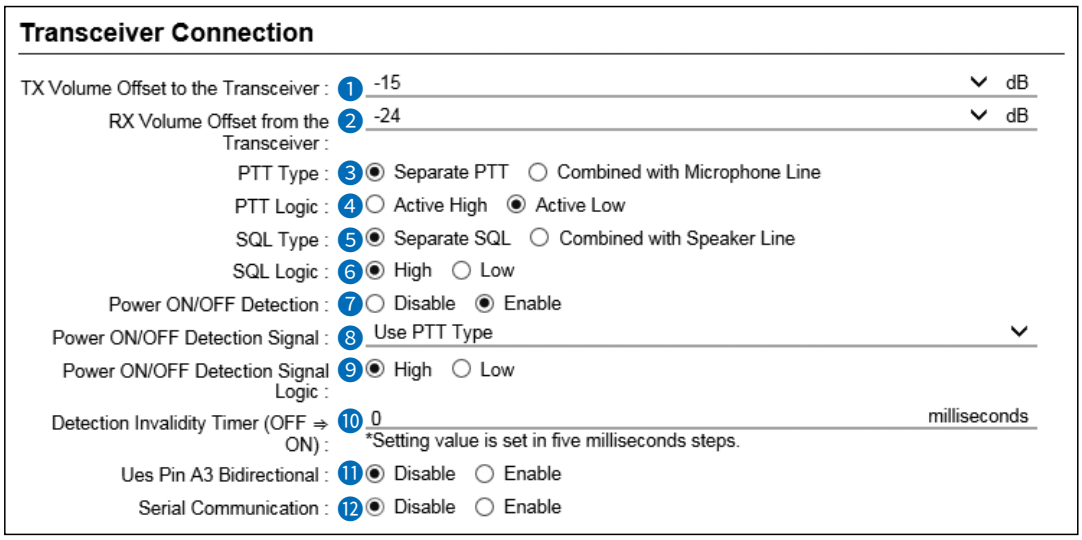

ⓘ 8 ~ 10 are displayed only when Power ON/OFF Detection (7) is set to “Enable.”

10 Detection Invalidity Timer (OFF → ON) …… Set the power ON/OFF detection delay time between 0 and 10000 (milliseconds) in 5 millisecond steps. (Default: 0)
When a transceiver’s power ON is detected, the RoIP Gateway mutes the audio input from the transceiver for the set period of time.
ⓘ If “0” is set, the audio input from the transceiver is not muted, even if the power ON status is detected.

11 Use Pin A3 Bidirectional … Select “Enable” to use one common line (A3 terminal) as the MIC input and AF output. If your transceiver commonly uses 1 line as the MIC input and AF output, select “Enable.” (Default: Disable)

12 Serial Communication …… Select “Enable” to use serial communication. (Default: Disable)
*Items 13 ~ 33 are displayed when “Enable” is selected.

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ Transceiver Connection (Transceiver Model: General Setting)

These items are displayed when “Transceiver” is selected as a connected unit.
(Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode > EXT I/O 1 ~ 4 > Connected Unit)
(Connection Port Settings > EXT I/O (EXT) > EXT I/O > EXT I/O Port)

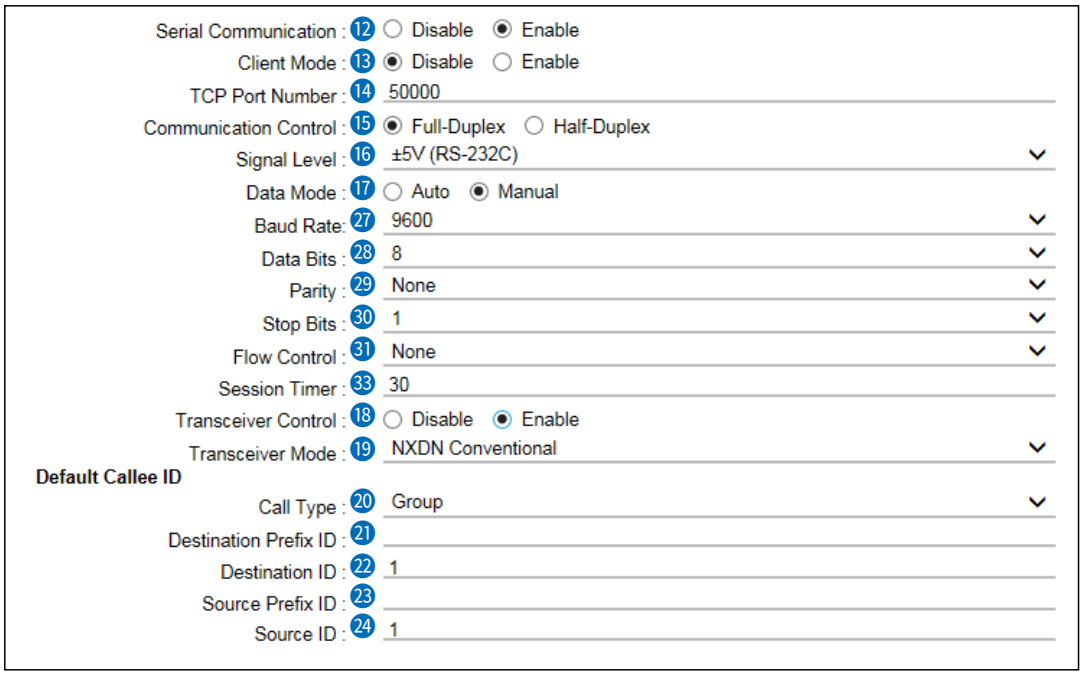

ⓘ 13 ~ 17 are displayed only when Serial Communication (12) is set to “Enable.”
ⓘ 27 ~ 33 and 18 are displayed only when Data Mode (17) is set to “Manual.”
ⓘ 19 ~ 24 are displayed only when Transceiver Control (18) is set to “Enable.”

13 Client Mode ..... Select “Enable” to set the RoIP Gateway as the client in serial communications. (Default: Disable)

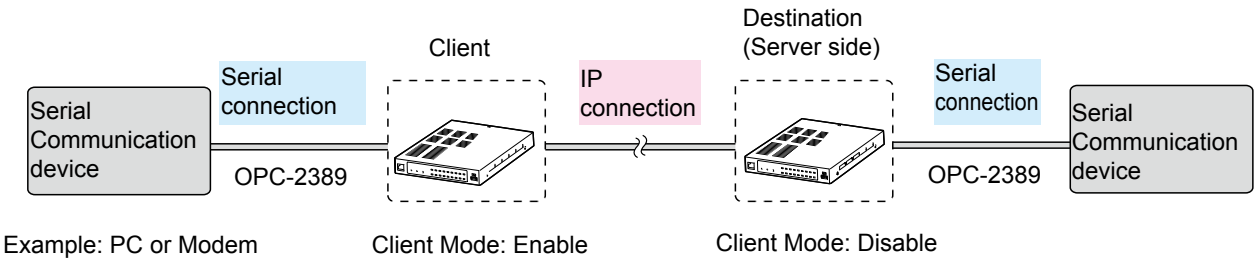

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ Transceiver Connection (Transceiver Model: General Setting)

These items are displayed when “Transceiver” is selected as a connected unit.
(Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode > EXT I/O 1 ~ 4 > Connected Unit)
(Connection Port Settings > EXT I/O (EXT) > EXT I/O > EXT I/O Port)

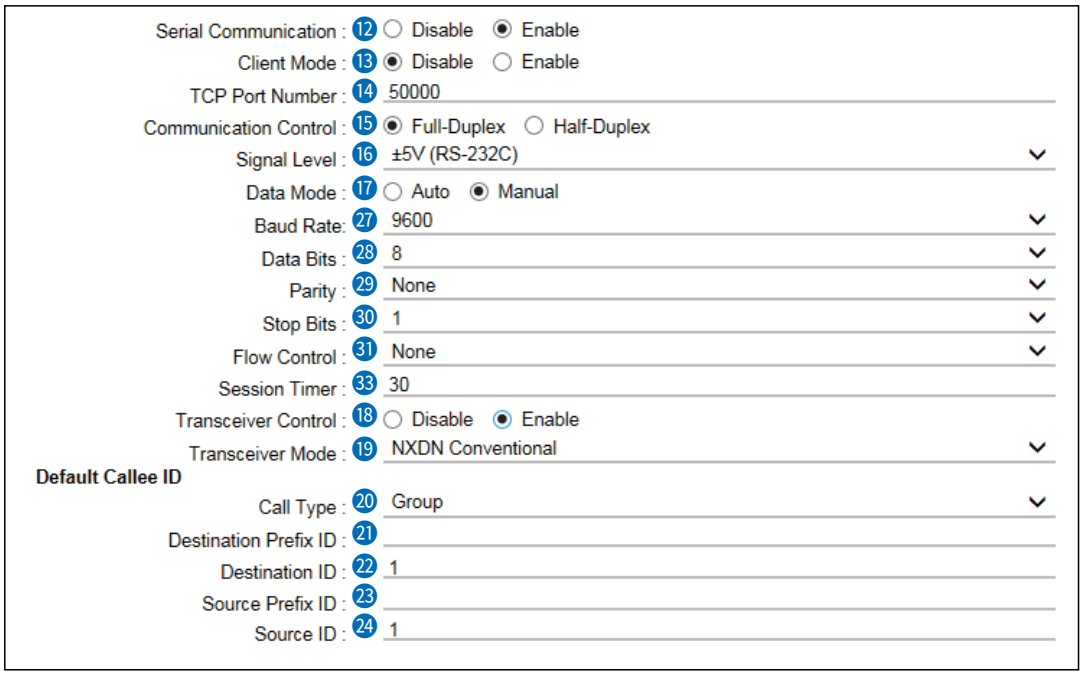

ⓘ 13 ~ 17 are displayed only when Serial Communication (12) is set to “Enable.”
ⓘ 27 ~ 33 and 18 are displayed only when Data Mode (17) is set to “Manual.”
ⓘ 19 ~ 24 are displayed only when Transceiver control (18) is set to “Enable.”

ⓘ The screen below shows when :
- Serial Communication (12) is set to “Enable.”
- Client Mode (13) is set to “Enable.”

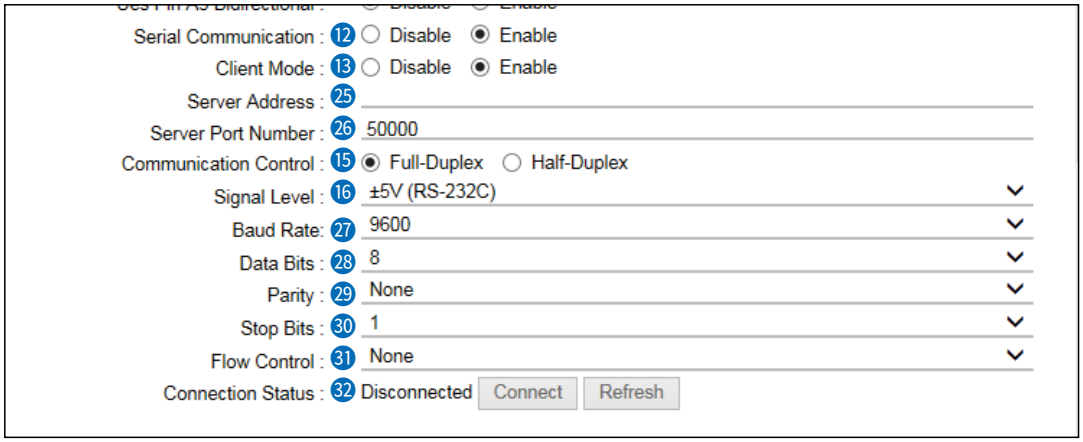

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ Transceiver Connection (Transceiver Model: General Setting)

These items are displayed when “Transceiver” is selected as a connected unit.
(Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode > EXT I/O 1 ~ 4 > Connected Unit)
(Connection Port Settings > EXT I/O (EXT) > EXT I/O > EXT I/O Port)

⑭ TCP Port Number ..... Enter a port number between 1024 and 65535.
(Default: EXT1=50000, EXT2=50001, EXT3=50002, EXT4=50003)

⑮ Communication Control ... Select the communication type, Full-Duplex or Half-Duplex.
(Default: Full-Duplex)

⑯ Signal Level ..... Select the serial communication line logic voltage level.
(Default: ±5V(RS-232C))
- Options: ±5V(RS-232C), 0V/3V (Logic), or 0V/5V (Logic)

⑰ Data Mode ..... Select the communication method for serial communication between a device and the RoIP Gateway. (Default: Auto)
- **Auto**: Automatically starts serial communication from a Virtual Serial Port installed on your PC.
- **Manual**: Manually set serial communication method for a device.

*Items ㉗ ~ ㉝, and ⑱ are displayed when “Manual” is selected.

⑱ Transceiver Control ..... Select “Enable” to control the transceiver using serial communication.
(Default: Disable)
*Items ⑲ ~ ㉔ are displayed when “Enable” is selected.

⑲ Transceiver Mode ..... Select an operating mode. (Default: NXDN Conventional)
- Options: NXDN Conventional, NXDN Trunking, dPMR, or SAT.

⑳ Call Type ..... Select a call type. (Default: Group)
- Options: Individual, Group, or All

㉑ Destination Prefix ID ..... Enter a destination prefix ID. The ID may differ, depending on the system. (Default: Blank)
- Range: 0 ~ 30

㉒ Destination ID ..... Enter the default ID for the EXT port between 00001 and 9999999.
(Default: 1)
ⓘ Enter an ID between 00001 and 99999 when the Destination Prefix ID (㉑) is entered.

㉓ Source Prefix ID ..... Enter a station’s source prefix ID. The ID may differ, depending on the system. (Default: Blank)
- Range: 0 ~ 30

㉔ Source ID ..... Enter a station’s source ID between 00001 and 9999999. The ID is sent to the destination. (Default: 1)
ⓘ Enter an ID between 00001 and 99999 when the Source Prefix ID (㉓) is entered.

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ Transceiver Connection (Transceiver Model: General Setting)

These items are displayed when “Transceiver” is selected as a connected unit.
(Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode > EXT I/O 1 ~ 4 > Connected Unit)
(Connection Port Settings > EXT I/O (EXT) > EXT I/O > EXT I/O Port)

㉕ **Server Address** ..... Enter a destination RoIP Gateway’s IP address.

㉖ **Server Port Number** ..... Enter a destination RoIP Gateway’s port number between 1024 and 65535.
(Default: EXT1=50000, EXT2=50001, EXT3=50002, EXT4=50003)

㉗ **Baud Rate** ..... Select the serial communication baud rate between a device and the RoIP Gateway. (Default: 9600)

㉘ **Data Bits** ..... Select the number of bits for serial communication. (Default: 8)

㉙ **Parity** ..... Select the parity bit. (Default: none)

㉚ **Stop Bits** ..... Select the stop bit length. (Default: 1)

㉛ **Flow Control** ..... Select the Flow control option. (Default: None)

㉜ **Connection Status** ..... Click to connect or disconnect the transceiver, or to refresh the connection status.
ⓘ The buttons are grayed out when Connected Repeater’s Address is blank.
ⓘ The settings cannot be changed while connection is established. Click <Disconnect> before changing the settings on this screen.

㉝ **Session Timer** ..... Set the time to cut the TCP session when there is no communication from the host. (Default: 30)

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ Bridge Communication

These items are displayed when “Transceiver” is selected as a connected unit.
(Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode > EXT I/O 1 ~ 4 > Connected Unit)
(Connection Port Settings > EXT I/O (EXT) > EXT I/O > EXT I/O Port)

Edit the Bridge Communication settings for transceivers connected to the EXT1 ~ EXT4 ports.
These items are Displayed only when “Connection Unit” is set to “Transceiver.”

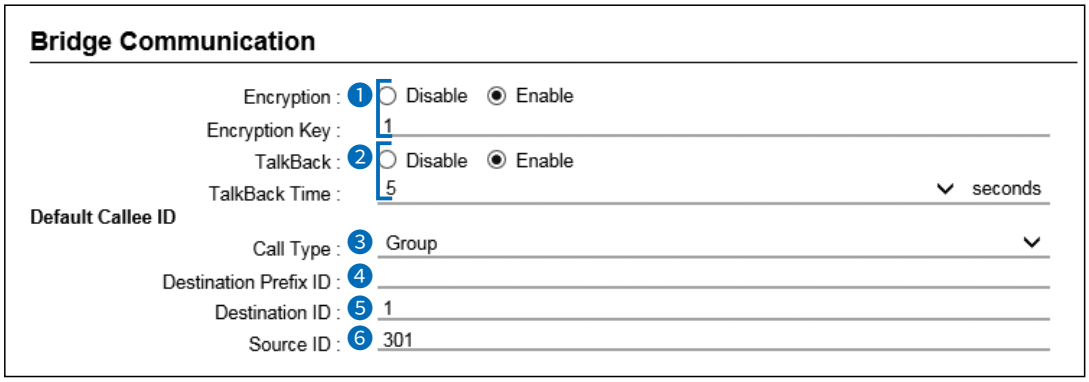

ⓘ The above screen shows when Encryption (❶) is set to “Enable.”
ⓘ ❷~❺ are not displayed when the Transceiver Model is set to “IC-SAT100.”

❶Encryption ..... Select whether or not to enable the Encryption function. (Default: Disable)
When you enable the function, enter an encryption key between 1 and 32767. (Default: 1)

❷TalkBack ..... Select whether or not to enable the TalkBack function. (Default: Enable)
When the function is enabled, Select the TalkBack time. (Default: 5)

- Range: 1 ~ 10 (seconds)

❸Call Type ..... Select a call type. (Default: Group)

- Options: Individual, Group, or All

❹Destination Prefix ID ..... Enter a destination prefix ID. The ID may differ, depending on the system. (Default: Blank)

- Range: 0 ~ 30

❺Destination ID ..... Enter the default ID for the EXT port between 00001 and 9999999. (Default: 1)

ⓘ Enter an ID between 00001 and 99999 when the Destination Prefix ID (❹) is entered.

❻Source ID ..... Enter a station’s source ID between 1 and 9999999. The ID is sent to the destinations.
(Default: EXT1=301, EXT2=302, EXT3=303, EXT4=304)

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ Transceiver Control (Transceiver Model: IC-SAT100)

These items are displayed when “Transceiver” is selected as a connected unit.
(Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode > EXT I/O 1 ~ 4 > Connected Unit)
(Connection Port Settings > EXT I/O (EXT) > EXT I/O > EXT I/O Port)

Edit the control settings for transceivers connected to the EXT1 ~ EXT4 ports.
These items are displayed only when “Connection Unit” is set to “Transceiver.”

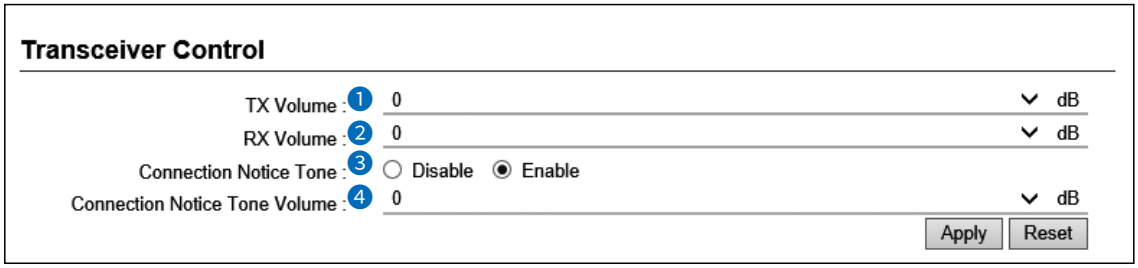

ⓘ ❹ is displayed only when ❸ is set to Enable.

❶ TX Volume .....
Adjust the RoIP Gateway’s transmitting audio level that is sent to the connected transceiver. (Default: 0)
• Range: –12 ~ +6 (dB)

❷ RX Volume .....
Adjust the RoIP Gateway’s audio output level of the audio signal that is received from the connected transceiver. (Default: 0)
• Range: –12 ~ +6 (dB)

❸ Connection Notice Tone ...
Select Whether or not to notify the connection status (success or failure) to the IC-SAT100 to the caller transceiver (only in the Full-Duplex communication) with a notification tone. (Default: Disable)
When enabling this item, the caller transceiver can receive a notification tone while holding down [PTT].
The RoIP Gateway alerts as a failure when:
• The RoIP Gateway could not connect to the IC-SAT100.
• The IC-SAT100 could not connect to any satellites.

❹ Connection Notice Tone Volume .....
Adjust the Connection Notice Tone audio level that is sent to the source transceiver. (Default: 0)
• Range: –12 ~ +6 (dB)

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ Transceiver Control (Transceiver Model: General Setting)

These items are displayed when “Transceiver” is selected as a connected unit.
(Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode > EXT I/O 1 ~ 4 > Connected Unit)
(Connection Port Settings > EXT I/O (EXT) > EXT I/O > EXT I/O Port)

Edit the control settings for transceivers connected to the EXT1 ~ EXT4 ports.
These items are displayed only when “Connection Unit” is set to “Transceiver.”

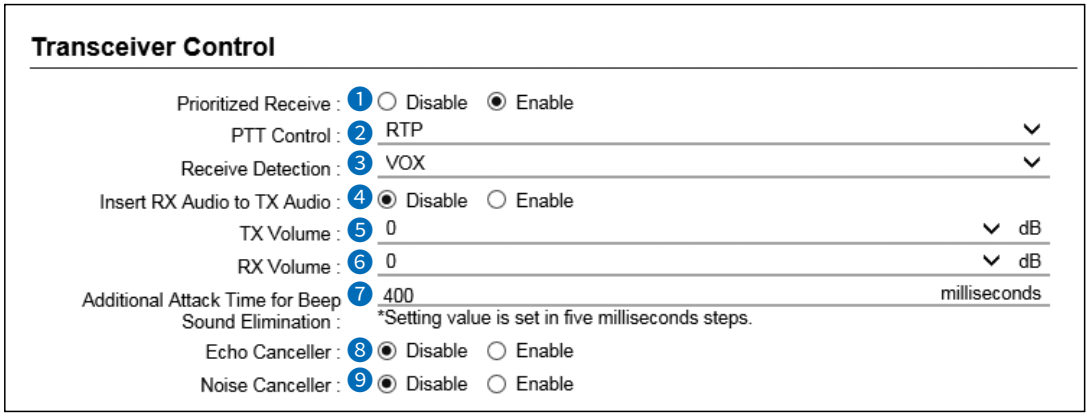

ⓘ ❷, ❽ and ❾ are displayed only when the Transceiver Model is set to “General Setting.”
ⓘ Only ❺ and ❻ are displayed when the Transceiver Model is set to “IC-SAT100.”

❶ Prioritized Receive .....
Select “Enable” to keep receiving and inhibit the transmission, while the transceiver is receiving. The default value differs, depending on the Transceiver Mode.

❷ PTT Control .....
Select the audio transmission method. (Default: RTP)
- **VOX**: According to the input audio signal level.
- **RTP**: The RoIP Gateway sends the PTT control signal to the transceiver during receiving an applicable RTP packet.
- **PTT Always-ON**: The RoIP Gateway always sends the PTT control signal to the transceiver to transmit.
- **No PTT Control**: The RoIP Gateway does not send the PTT control signal to the transceiver.

❸ Receive Detection .....
Select the received audio detection method. The default value differs, depending on the Transceiver Mode.
- **VOX**: According to the input audio signal level.
- **SQL**: According to the squelch status (Open/Close)
  When setting to “SQL,” set also Pull-up Control ON or OFF.
- **Always Receive**: Always in the receive mode.
- **PC CMD**: According to the PC command. (Displayed only when the Transceiver Model is set to “General Settings.”)

❹ Insert RX Audio to TX Audio
Select “Enable” to mix the audio from the repeater with the audio from the telephone. (Default: Disable)
ⓘ When “Enable” is selected, select “Disable” in Prioritized Receive (❶).

❺ TX Volume .....
Adjust the RoIP Gateway’s transmitting audio level that is sent to the connected transceiver. (Default: 0)
- Range: –12 ~ +6 (dB)

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ Transceiver Control (Transceiver Model: General Setting)

These items are displayed when “Transceiver” is selected as a connected unit.
(Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode > EXT I/O 1 ~ 4 > Connected Unit)
(Connection Port Settings > EXT I/O (EXT) > EXT I/O > EXT I/O Port)

Edit the control settings for transceivers connected to the EXT1 ~ EXT4 ports.
These items are displayed only when “Connection Unit” is set to “Transceiver.”

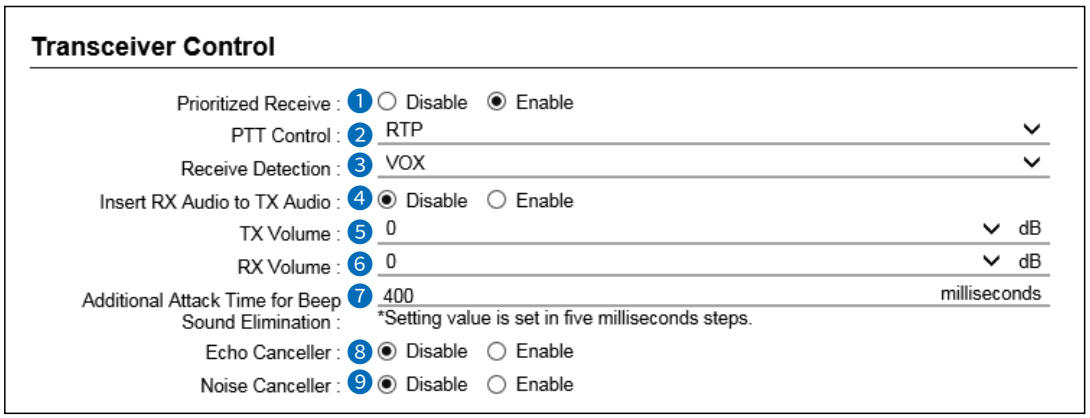

ⓘ 2, 8 and 9 are displayed only when the Transceiver Model is set to “General Setting.”

6 RX Volume ..... Adjust the RoIP Gateway’s audio output level of the audio signal that is received from the connected transceiver. (Default: 0)
- Range: –12 ~ +6 (dB)

7 Additional Attack Time for Beep Sound Elimination ... Enter the period of time to mute the audio (including beep signals) from the connected transceiver. (Default: 400)
- Range: 0 ~ 1000 (milliseconds) in 5 millisecond steps

8 Echo Canceller ..... Select whether or not to enable the Echo Canceller function. The function reduces echo caused during duplex communication. (Default: Disable)

9 Noise Canceller ..... Select whether or not to enable the Noise Canceller function. (Default: Disable)

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ DTMF Dialing

These items are displayed when “Transceiver” is selected as a connected unit (except for the Transceiver Model is set to “IC-SAT100.”)
(Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode > EXT I/O 1 ~ 4 > Connected Unit)
(Connection Port Settings > EXT I/O (EXT) > EXT I/O > EXT I/O Port)

Edit the DTMF Dialing settings.

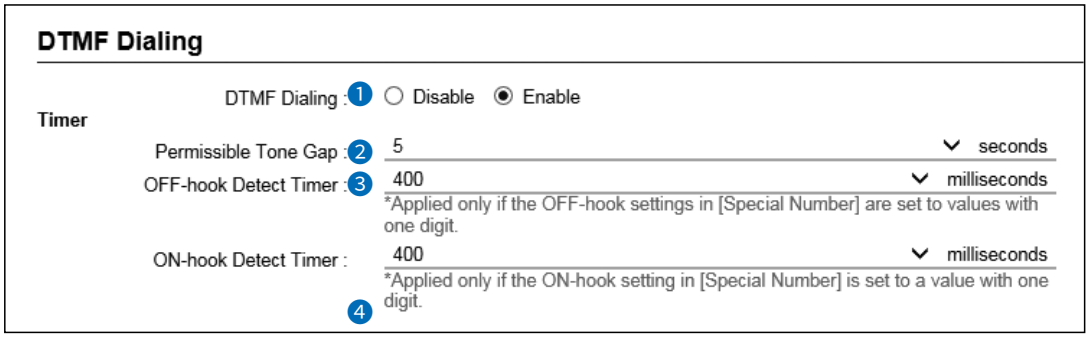

ⓘ ❷ ~ ❹ are displayed only when the DTMF Dialing (❶) is set to “Enable.”

❶DTMF Dialing ..... Select whether or not to use the DTMF Dialing function. (Default: Disable)

❷Permissible Tone Gap ... Select the period of time to detect that the last digit has been input. (Default: 5)

- Range: 1 ~ 10 (seconds)

❸OFF-hook Detect Timer ... Select the period of time to detect the OFF-hook control signal. (Default: 400)

- Range: 0 ~ 2000 (milliseconds) in 100 millisecond steps

❹ON-hook Detect Timer ..... Select the period of time to detect the ON-hook control signal. (Default: 400)

- Range: 0 ~ 2000 (milliseconds) in 100 millisecond steps

ⓘ ❸ and ❹ are the timers for the Transceiver Special Number. (PBX > Special Number > Transceiver Special Number)

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ PTT Control Setting

These items are displayed when “Transceiver” is selected as a connected unit (except for the Transceiver Model is set to “IC-SAT100.”)
(Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode > EXT I/O 1 ~ 4 > Connected Unit)
(Connection Port Settings > EXT I/O (EXT) > EXT I/O > EXT I/O Port)

Edit the PTT control settings.

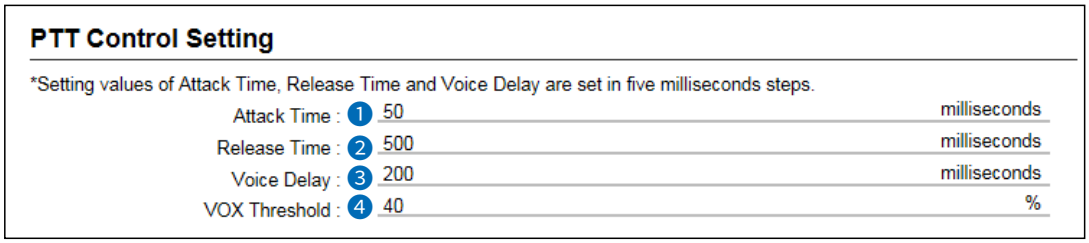

ⓘ 1 and 4 are displayed only when Connection Unit is set to “Transceiver,” Transceiver Model is set to “General Setting,” and PTT Control is set to “VOX.”
ⓘ 2 and 3 are displayed only when Connection Unit is set to “Transceiver.”

1 Attack Time ..... Set the TX Attack time to between 5 and 500 milliseconds. It is the delay time before the VOX switch turns ON after an audio signal is received through the network. (Default: 50)

2 Release Time ..... Set the RX Delay time. It is the delay time for the VOX switch to turn OFF after no audio signal is received through the network. (Default: 500)

ⓘ When the PTT Control in [Transceiver Control] is set to “RTP,” the default value is “200.”

- Range: 5 ~ 2000 (milliseconds)

3 Voice Delay ..... Enter the amount of time to store the audio, in 5 millisecond steps. (Default: 200)

ⓘ When the PTT Control in [Transceiver Control] is set to “RTP,” the default value is “300.”

- Range: 0 ~ 1500 (milliseconds)

4 VOX Threshold ..... Enter the voice threshold level. (Default: 40)

- Range: 0 ~ 100 (%)

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ Receive Detection Setting

These items are displayed when “Transceiver” is selected as a connected unit.
(Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode > EXT I/O 1 ~ 4 > Connected Unit)
(Connection Port Settings > EXT I/O (EXT) > EXT I/O > EXT I/O Port)

Edit the DTMF Dialing settings.

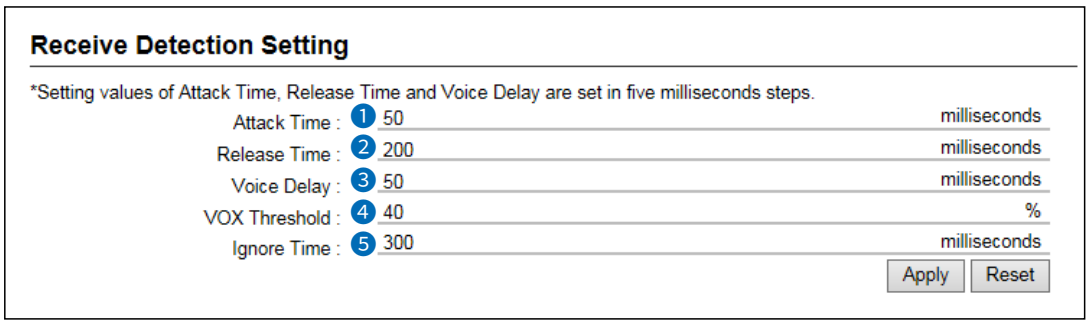

ⓘ ❶ and ❹ are displayed only when “Connection Unit” is set to “Transceiver,” and the “Receive Detection” is set to “VOX.”
ⓘ ❷ is displayed only when “Connection Unit” is set to “Transceiver,” and the “Receive Detection” is set to “VOX” or “SQL.”
ⓘ ❸ is displayed only when “Connection Unit” is set to “Transceiver.”
ⓘ ❺ is displayed only when “Connection Unit” is set to “Transceiver,” and the “Receive Detection” is set to “SQL.”

❶ Attack Time ..... Set the TX Attack time. It is the delay time before the VOX switch turns ON after an audio signal is received through the network. (Default: 50)
• Range: 5 ~ 2000 (milliseconds) in 5 millisecond steps

❷ Release Time ..... Set the RX Delay time. It is the delay time for the VOX switch to turn OFF after no audio signal is received through the network. (Default: 200)
• Range: 5 ~ 2000 (milliseconds) in 5 millisecond steps

❸ Voice Delay ..... Enter the period of time to store the audio. (Default: 5)
ⓘ When the Receive Detection is set to “VOX,” the default value is “50.”
• Range: 0 ~ 1500 (milliseconds) in 5 millisecond steps

❹ VOX Threshold ..... Enter the voice threshold level. (Default: 40)
• Range: 0 ~ 100 (%)

❺ Ignore Time ..... Enter the period of time to ignore the detected SQL signal. (Default: 300)
• Range: 0 ~ 2000 (milliseconds) in 5 millisecond steps

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ EXT I/O Device Connection

This item is displayed only when “Connected Unit” is set to “EXT I/O Unit,” and “EXT I/O Port Mode” is set to “Combined.”(Connection Port Settings > EXT I/O (EXT))

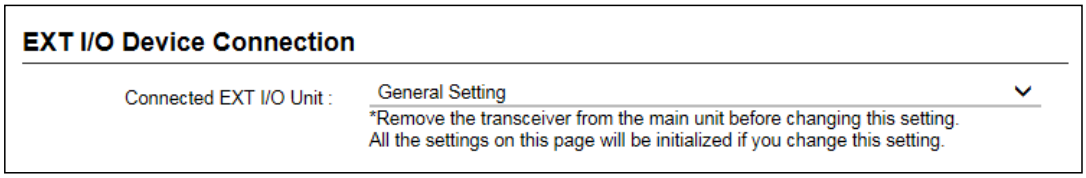

Connected EXT I/O Unit …… Select the connected external input/output unit.

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ Bridge Communication

Edit the Bridge Communication settings for external input/output devices connected to the EXT1 ~ EXT4 ports.
These items are displayed only when “Connected Unit” is set to “EXT I/O Unit,” and “EXT I/O Port Mode” is set to “Combined.”(Connection Port Settings > EXT I/O (EXT))

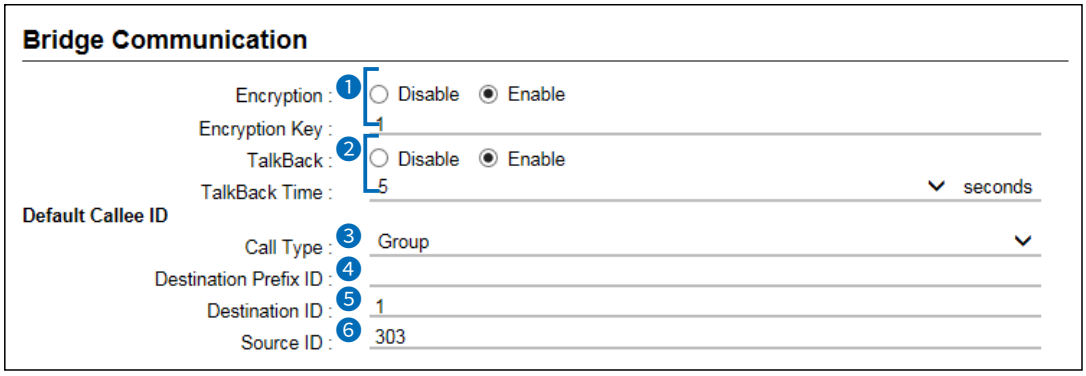

❶Encryption ..... Select whether or not to enable the Encryption function. (Default: Disable)
When you enable the function, enter an encryption key between 1 and 32767. (Default: 1)

❷TalkBack ..... Select whether or not to enable the TalkBack function. (Default: Enable)
When the function is enabled, Select the TalkBack time. (Default: 5)
• Range: 1 ~ 10 (seconds)

❸Call Type ..... Select a call type. (Default: Group)
• Options: Individual, Group, or All

❹Destination Prefix ID ..... Enter a destination prefix ID. The ID may differ, depending on the system. (Default: Blank)
• Range: 0 ~ 30

❺Destination ID ..... Enter the default ID for the EXT port between 1 and 9999999. (Default: 1)
ⓘ Enter an ID between 00001 and 99999 when the Destination Prefix ID (❹) is entered.

❻Source ID ..... Enter a station’s source ID between 1 and 9999999. The ID is sent to the destinations.
(Default: EXT1=301, EXT2=302, EXT3=303, EXT4=304)

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ EXT I/O Control

Edit the input/output settings of the RoIP Gateway's EXT1 ~ EXT4 ports.
These items are displayed only when "Connected Unit" is set to "EXT I/O Unit," and "EXT I/O Port Mode" is set to "Combined."(Connection Port Settings > EXT I/O (EXT))

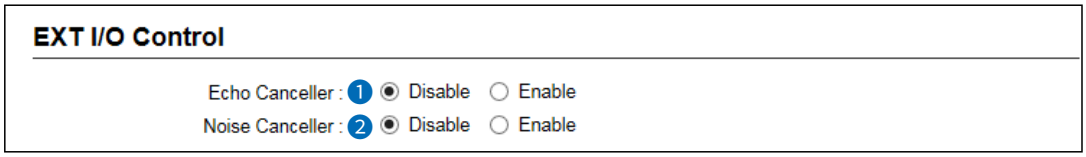

❶Echo Canceller ..... Select whether or not to enable the Echo Canceller function. The function reduces echo caused by receiving more than 2 calls at the same time. (Default: Disable)

❷Noise Canceller ..... Select whether or not to enable the Noise Canceller function. (Default: Disable)

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ EXT Input Settings

Edit the input settings of the RoIP Gateway's EXT1 ~ EXT4 ports.

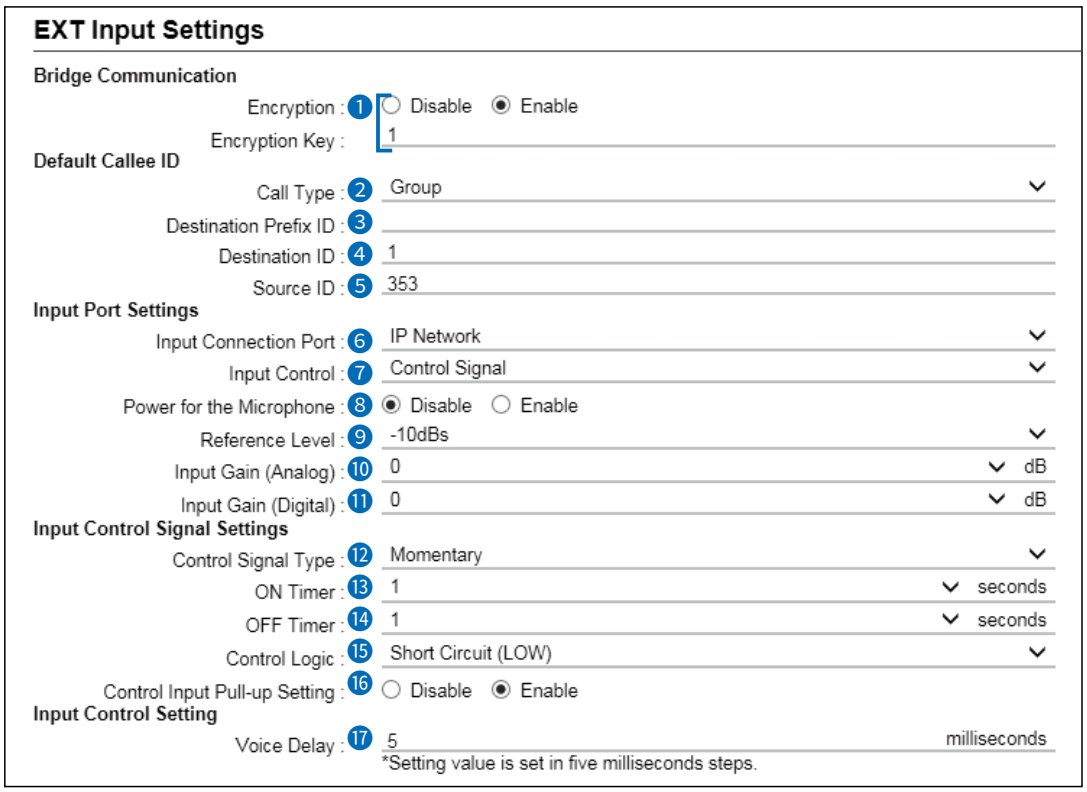

ⓘ ❶ ~ ❺ are displayed only when "Connected Unit" is set to "EXT I/O Unit," and "EXT I/O Port Mode" is set to "Separate." (Connection Port Settings > EXT I/O (EXT))

❶ Encryption ..... Select whether or not to enable the Encryption function. (Default: Disable)
When you enable the function, enter an encryption key between 1 and 32767. (Default: 1)

❷ Call Type ..... Select a call type. (Default: Group)

❸ Destination Prefix ID ..... Enter a destination prefix ID. The ID may differ, depending on the system. (Default: Blank)
• Range: 0 ~30

❹ Destination ID ..... Enter the default ID for the EXT port between 1 and 9999999. (Default: 1)
ⓘ Enter an ID between 00001 and 99999 when the Destination Prefix ID (❸) is entered.

❺ Source ID ..... Enter a station's source ID between 1 and 9999999. The ID is sent to the destinations.
(Default: EXT1=301, EXT2=302, EXT3=303, EXT4=304)
ⓘ When EXT I/O Port Mode is set to "Separate," the default values are EXT1=351, EXT2=352, EXT3=353, and EXT4=354.

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ EXT Input Settings

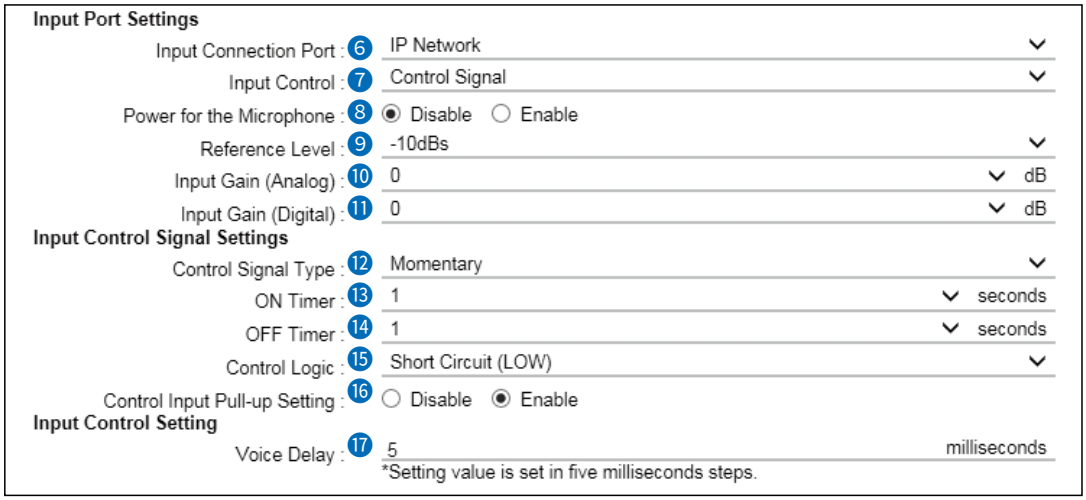

6 Input Connection Port …… Select the port which outputs the received audio signal.

(Default: IP Network)

- **EXT Output**: Sends the audio signal to the devices that are connected to EXT1 ~ EXT4 ports.
- **IP Network**: Sends the audio signal to the devices that are connected to the RoIP Gateway through the IP network.
- **Emergency**: Sends the audio signal to the device that is specified as the emergency call destination in the "Emergency Notification."
  (Expert Settings > Emergency Notification)
  ⓘ Emergency communication has priority over normal communication.
  ⓘ The RoIP Gateway enters the Emergency mode when the option selected in the Input Control (7) of the EXT1 ~ EXT4 ports are satisfied.
  ⓘ In the Emergency mode, all ongoing communication routes, other than that for the Emergency Notice, are disconnected.
  ⓘ To transmit the call as the Emergency Notice:
  - Confirm the "Bridge Communication Source" is set to "Emergency Notification."
    (Bridge Connection Settings > Bridge Connection > Bridge Connection > Bridge Connection Source)
  - Confirm the "Bridge Communication Destination" is set to "Custom Bridge Connection."
    (Bridge Connection Settings > Bridge Connection > Bridge Connection > Bridge Communication Destination)
  - Confirm the "Emergency Notification Equipment" is set to "Enable."
    (Expert Settings > Emergency Notification > Emergency Notification > Emergency Notification Equipment)

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ EXT Input Settings

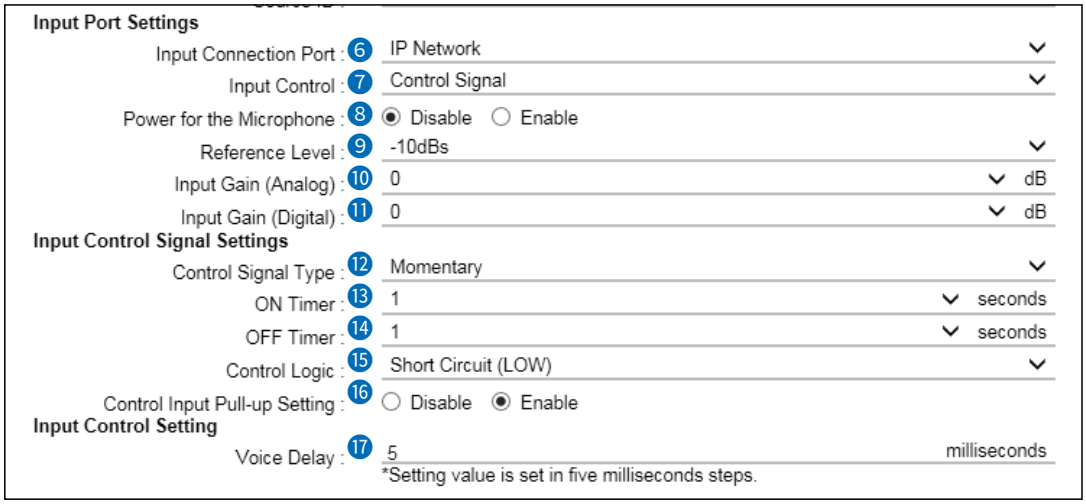

7 Input Control ..... Select the control type to send the audio signal. (Default: Control Signal)

- **Always-ON**: Always sends the audio signal to the destination selected in the Input Connection Port (6).
  ⓘ When "Emergency" is selected in Input Connection Port (6), this option cannot be selected.
- **VOX**: When an audio signal is input, sends the audio signal to the destination selected in the Input Connection Port (6).
- **Control Signal**: When the control signal is input, sends the audio signal to the destination selected in the Input Connection Port (6).

8 Power for the Microphone Select "Enable" to supply the voltage to the microphone connected to A3/A4 terminal (Audio input) microphone. (Default: Disable)

9 Reference Level ..... Select the input line A3/A4 terminal (Audio input) sensitivity. (Default: –10dBs)

- Options: –10 dBs or –40dBs

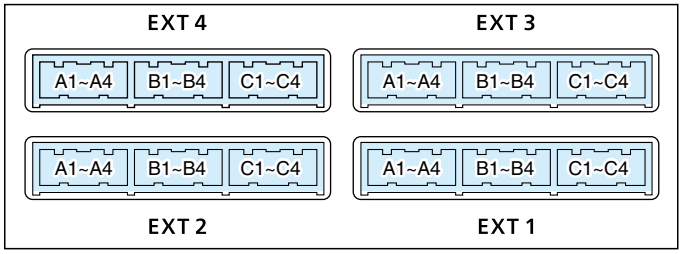

Refer to the INSTALLATION GUIDE Section 6 for the port details.

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ EXT Input Settings

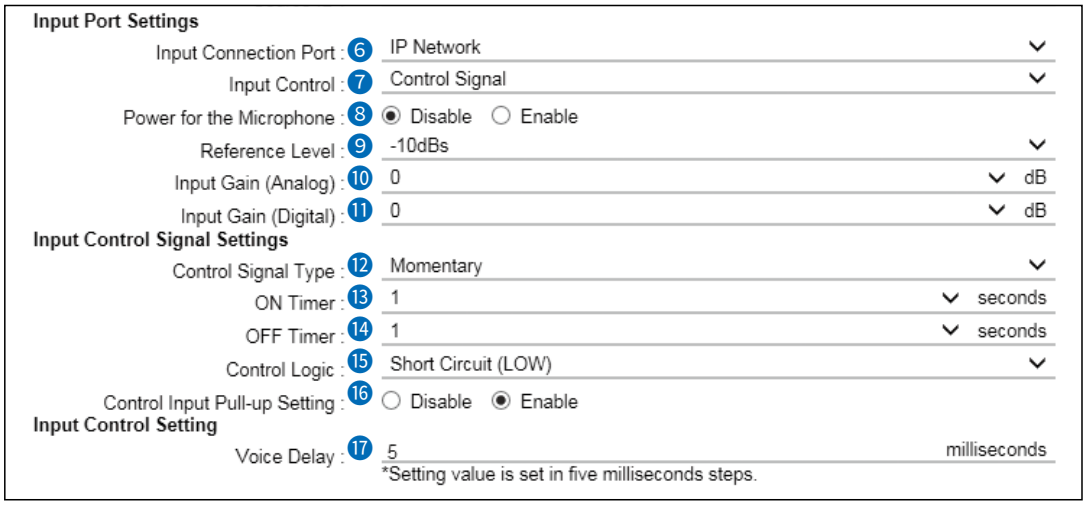

⑩ Input Gain (Analog) ..... Set the analog signal input gain (A3/A4 terminal (Audio input)). (Default: 0)

- Range: –74 ~ +21 (dB)

⑪ Input Gain (Digital) ..... Set the digital signal input gain (A3/A4 terminal (Audio input)). (Default: 0)

- Range: –12 ~ +6 (dB)

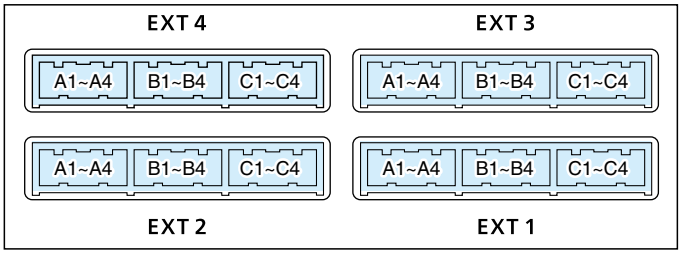

Refer to the INSTALLATION GUIDE Section 6 for the port details.

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ EXT Input Settings

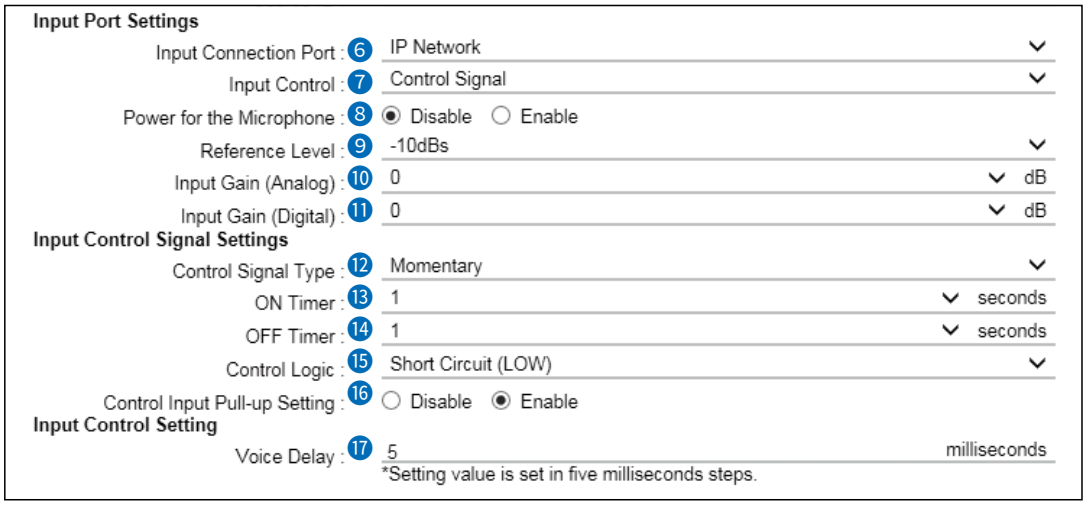

⑫ Control Signal Type ..... Select the control signal input type. (Default: Momentary)

- **Momentary**: While the control signal is input from the B3/B4 terminal (General control I/O), activates the port.
- **One-shot**: When the control signal is input from the B3/B4 terminal (General control I/O), continuously activates the port. And deactivates with no input. The input signal has been detected for the period of time, that is set in the ON Timer (⑬). The RoIP Gateway recognizes the signal input and retains the type for the period of time, that is set in the OFF Timer (⑭).

⑬ ON Timer ..... Select the delay time until the input is detected. (Default: 1)

- Range: 0.1 ~ 3 (seconds)

⑭ OFF Timer ..... Select the delay time until the port (B3/B4 terminal (General control input)) is deactivated. (Default: 1)

- Range: 0.1 ~ 3 (seconds)

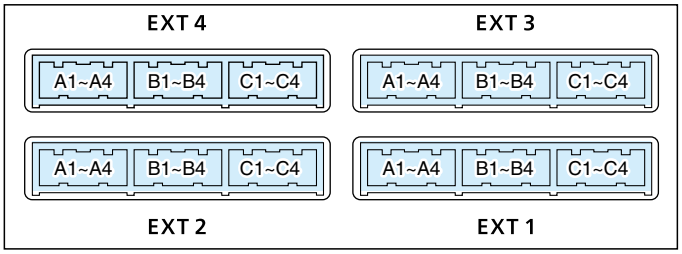

Refer to the INSTALLATION GUIDE Section 6 for the port details.

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ EXT Input Settings

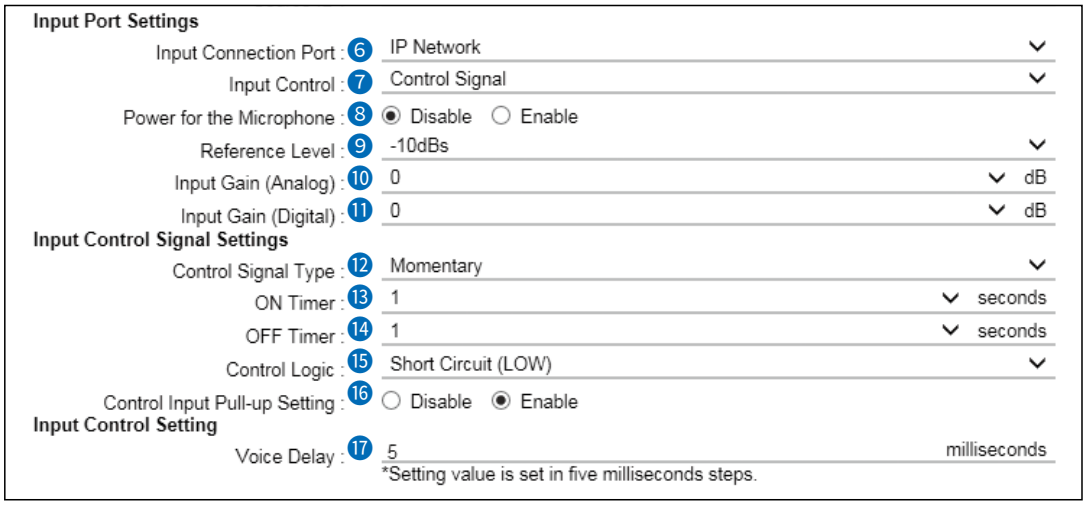

⑮ Control Logic ..... Select the port input state of the B3/B4 terminals (General control input). (Default: Short Circuit (LOW))
The control signal input is detected as follows:
When the “Control Input Pull-up Setting” (⑯) is enabled:
- **Short Circuit (LOW):** Detects when the B3/B4 terminals are Shortened
- **Open Circuit (HIGH):** Detects when the B3/B4 terminals are Open

When the “Control Input Pull-up Setting” (⑯) is disabled:
- **Short Circuit (LOW)**: Detects when no voltage is applied between the B3 and B4 terminals.
- **Open Circuit (HIGH):** Detects when any voltage is applied between the B3 and B4 terminals.

⑯ Control Input Pull-up Setting Select whether or not to internally pull up the B3/B4 terminal (General control input). (Default: Enable)

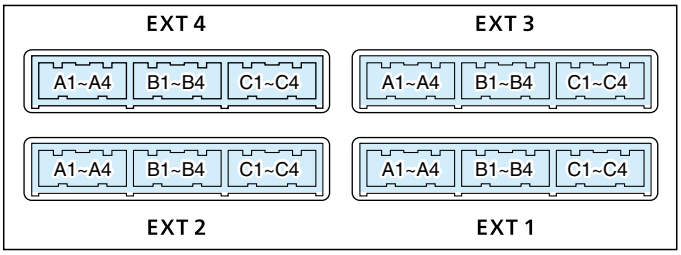

Refer to the INSTALLATION GUIDE Section 6 for the port details.

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ EXT Input Settings

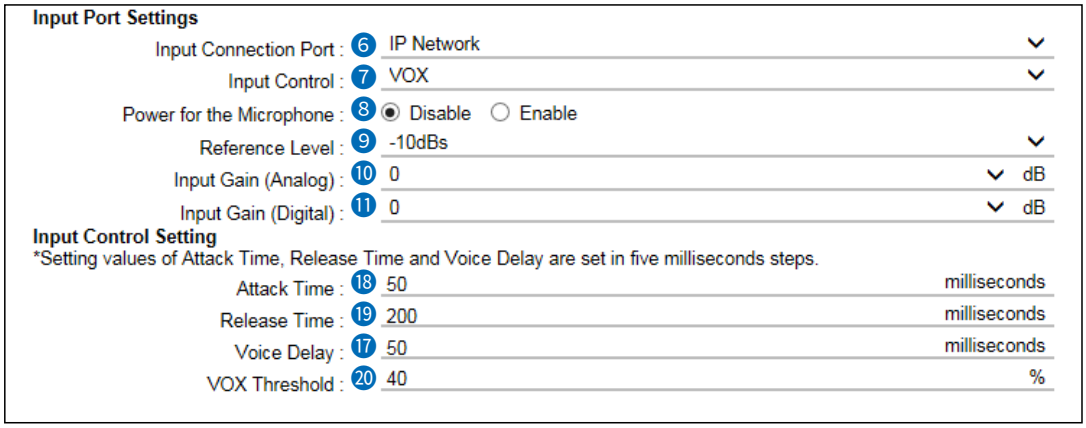

ⓘ 18,19, and 20 are displayed when Input Control (7) is set to "VOX."

17 Voice Delay ..... Set the audio signal buffer time.
(Default: when Input Control is "VOX"=50, others=5)
• Range: 0 ~ 500 (milliseconds) in 5 millisecond steps

18 Attack Time .....
Input Control: VOX
Set the TX Attack time. It is the delay time before the VOX switch turns ON after an audio signal is received through the network. (Default: 50)
• Range: 5 ~ 2000 (milliseconds)

19 Release Time .....
Input Control: VOX
Set the RX Delay time. It is the delay time for the VOX switch to turn OFF after no audio signal is received through the network.
(Default: 200)
• Range: 5 ~ 2000 (milliseconds)

20 VOX Threshold .....
Input Control: VOX
Enter the voice threshold level. (Default: 40)
• Range: 0 ~ 100 (%)

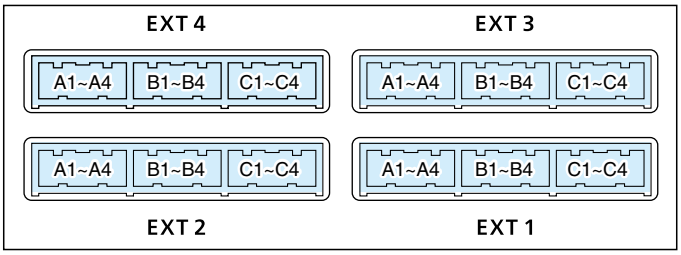

Refer to the INSTALLATION GUIDE Section 6 for the port details.

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ EXT Output Settings

Edit the output settings of the RoIP Gateway's EXT1 ~ EXT4 ports.



ⓘ ❶ and ❷ are displayed only when "Connected Unit" is set to "EXT I/O Unit," and "EXT I/O Port Mode" is set to "Separate." (Connection Port Settings > EXT I/O (EXT))

❶ Encryption ..... Select whether or not to enable the Encryption function. (Default: Disable)
When you enable the function, enter an encryption key between 1 and 32767. (Default: 1)

❷ Source ID ..... Enter a station's source ID between 00001 and 60000.
(Default: EXT1=00301, EXT2=00302, EXT=00303, EXT4=00304)

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ EXT Output Settings

Switching Control: Control Output Circuit

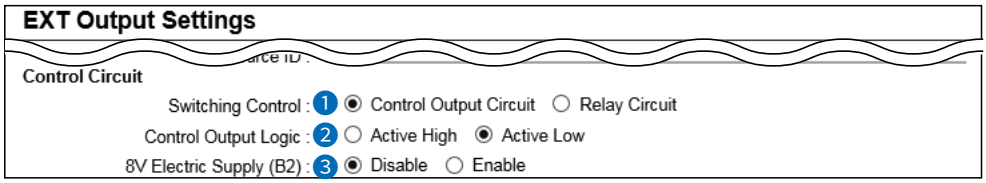

Switching Control: Relay Circuit



❶ Switching Control ……

Select the control circuit type. (Default: Control Output Circuit)

ⓘ If “Relay Circuit” is selected, the “Communication Control” is automatically set to “Full-Duplex.”

(Communication Port Settings > EXT I/O (EXT) > Transceiver Connection > Communication Control)

❷ Control Output Logic ……

Switching Control: Control Output Circuit

Select the activate state. (Default: Active Low)

When the Switching Control (❶) is set to “Relay Circuit,” select the port state. Relay output terminal (B1/B2 terminal) is short or open circuit. When the audio signal is output, the control signal is also output.

(Default: Short)

❸ 8V Electric Supply (B2) …

Switching Control: Relay Circuit

Select whether or not to supply the 8 V to the microphone that is connected to the external output terminal. (Default: Disable)

ⓘ Specification: Less than 30 mA

ⓘ If “Enable” is selected, the “Communication Control” is automatically set to “Full-Duplex.”

(Communication Port Settings > EXT I/O (EXT) > Transceiver Connection > Communication Control)

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ EXT Output Settings

Client Mode: Disable

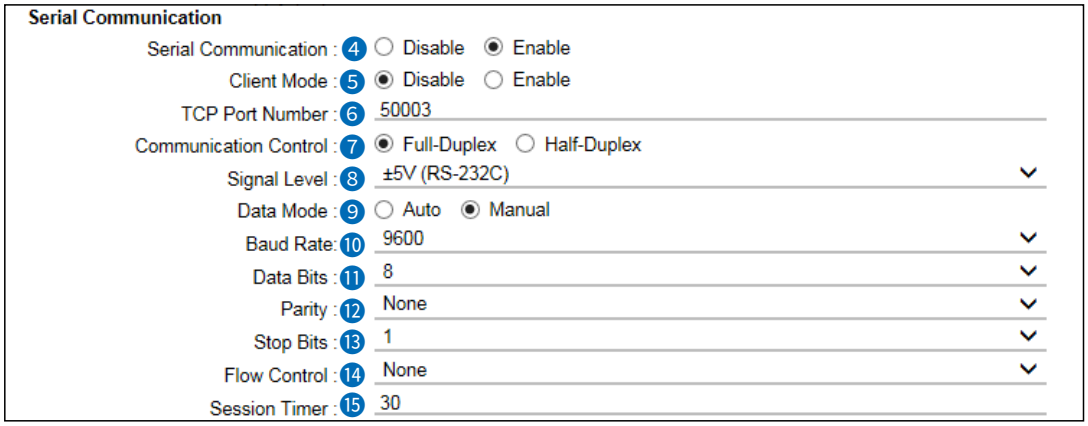

ⓘ The screen shows Serial Communication (❹) is set to “Enable,” and Client Mode (❺) is set to “Disable.”
ⓘ ❿ ~ ⓯ are displayed only when the Data Mode (❾) is set to “Manual.”

Client Mode: Enable

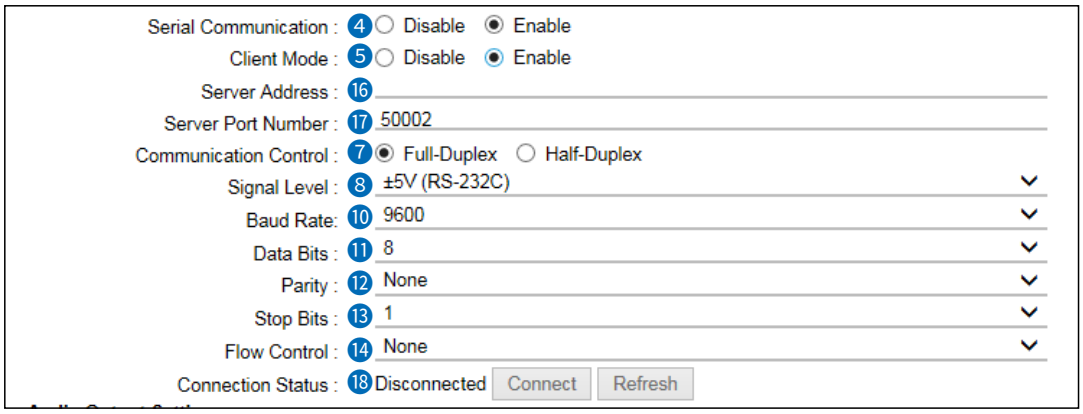

ⓘ The screen shows Serial Communication (❹) and Client Mode (❺) is set to “Enable.”

❹ Serial Communication …… Select “Enable” to use serial communications. (Default: Disable)
*Items ❺ ~ ❾ are displayed when “Enable” is selected.

❺ Client Mode …… Select “Enable” to set the RoIP Gateway as the client in serial communications.
(Default: Disable)
ⓘ When Enabling this the Client Mode, enter the Server Address (⓰) and the Server Port number (⓱).

❻ TCP Port Number …… Enter a port number between 1024 and 65535.
(Default: EXT1=50000, EXT2=50001, EXT3=50002, EXT4=50003)

❼ Communication Control … Select the communication type. (Default: Full-Duplex)
ⓘ Automatically set to “Full-Duplex” when Switching Control (❶) is set to “Relay Circuit.”

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ EXT Output Settings

Client Mode: Disable

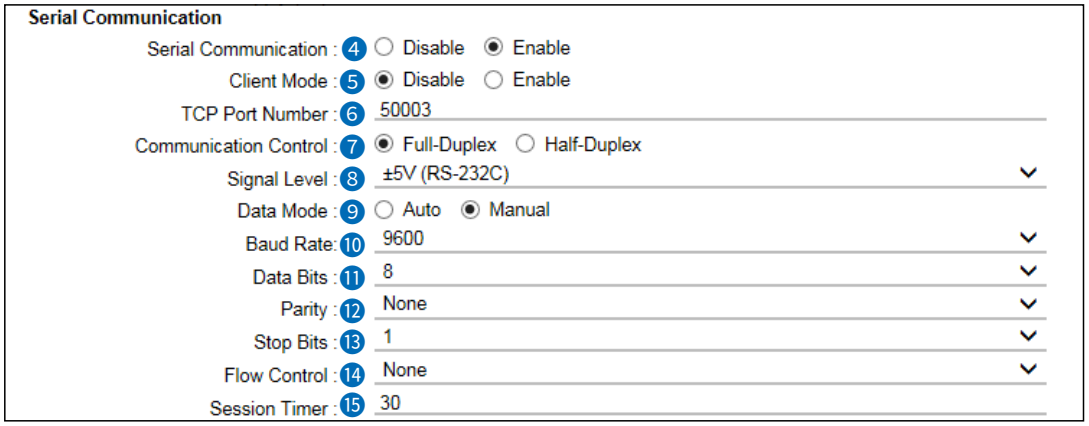

ⓘ The screen shows Serial Communication (❹) is set to “Enable,” and Client Mode (❺) is set to “Disable.”
ⓘ ❿ ~ ⓯ are displayed only when the Data Mode (❾) is set to “Manual.”

❽ Signal Level ..... Select the serial communication line logic voltage level. (Default: ±5V(RS-232C))

❾ Data Mode ..... Select the communication method for serial communications between a device and the RoIP Gateway. (Default: Auto)
- **Auto**: Automatically starts serial communications from a Virtual Serial Port installed on your PC.
- **Manual**: Manually set serial communication method for a device.

ⓘ Items ❿ ~ ⓯ are displayed when “Manual” is selected.

❿ Baud Rate ..... Select the serial communication baud rate between a device and the RoIP Gateway. (Default: 9600)

⓫ Data Bits ..... Select the number of bits for serial communications. (Default: 8)

⓬ Parity ..... Select the parity bit. (Default: None)

⓭ Stop Bits ..... Select the stop bit length. (Default: 1)

⓮ Flow Control ..... Select the Flow control option. (Default: None)

⓯ Session Timer ..... Set the time to cut the TCP session when there is no communication from the host. (Default: 30)

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ EXT Output Settings

Client Mode: Enable

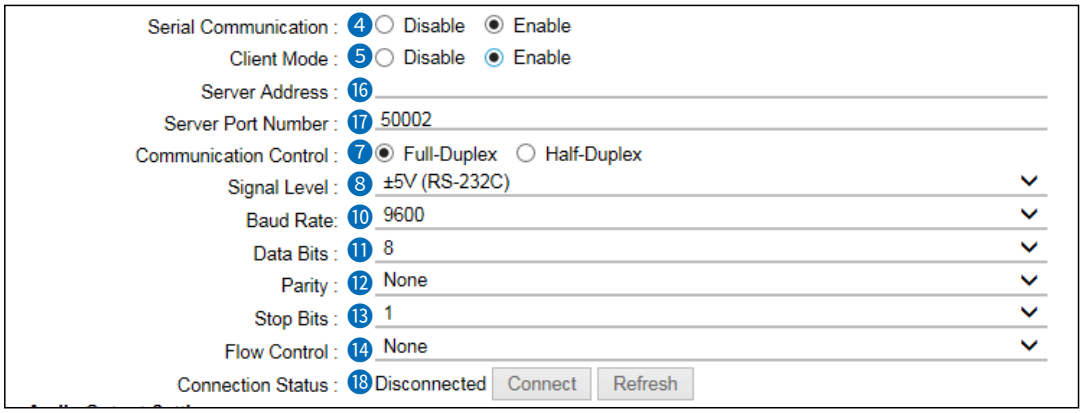

ⓘ The screen shows when Serial Communication (❹) and Client Mode (❺) are set to "Enable."

⓰ Server Address ..... Enter the destination RoIP Gateway's IP address.

⓱ Server Port Number ..... Enter the destination RoIP Gateway's port number between 1024 and 65535.
(Default: EXT1=50000, EXT2=50001, EXT3=50002, EXT4=50003)

⓲ Connection Status ..... Click to connect or disconnect a transceiver, or to refresh the connection status.
ⓘ The buttons are grayed out when Connected Repeater's Address is blank.
ⓘ The settings cannot be changed while connection is established. Click <Disconnect> before changing the settings on this screen.

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ EXT Output Settings

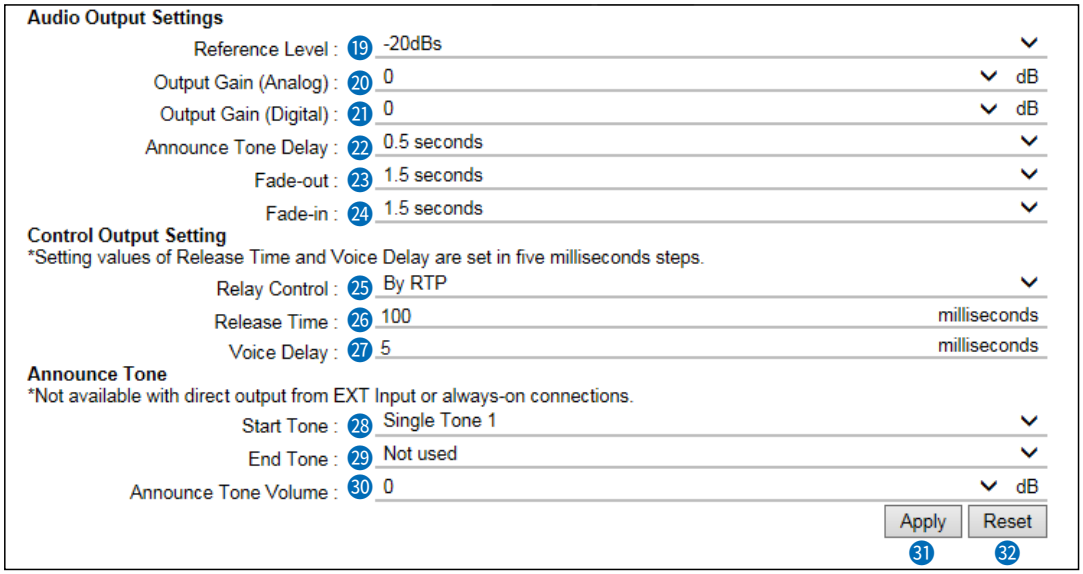

⑲ Reference Level ..... Select the output level of A1/A2 terminal (Audio output). (Default: –20dBs)

- Options: Speaker, 0dBs, or –20dBs

⑳ Output Gain (Analog) ..... Set the analog signal input gain (A1/A2 terminal (Audio output)). (Default: 0)

- Range: –43 ~ +20 (dB)

㉑ Output Gain (Digital) ..... Set the digital signal input gain (A1/A2 terminal (Audio output)). (Default: 0)

- Range: –12 ~ +6 (dB)

㉒ Announce Tone Delay ..... Select the delay time before the received audio is output. This delay time is set according to your sound device's specifications. The default value differs, depending on the EXT I/O Port Mode setting. (Default: Separate: 0.5 seconds Combined: 1.5 seconds)

- Range: 0.5 ~ 3 (seconds)

ⓘ Select "Disable" to output the audio right after the signal is received.

㉓ Fade-out ..... Set the period of time that the audio signal is muted. (Default: 1.5)

- Range: Disable, or 0.5 ~ 3 (seconds)

The Auto Fader function is usable on the following settings.

- When the "Connected Unit" is set to "EXT I/O Unit," and "EXT I/O Port Mode" is set to "Separate."
  (Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode)
  ⓘ The "Input Connection Port" is set to "EXT Output."
  (External input and output ports are directly connected.)
  (Connection Port Settings > EXT I/O (EXT) > EXT Input Settings > Input Connection Port)
- The "Priority Level" is set to "Priority" or "High Priority."
  (PBX Advanced Settings > Prioritization > EXT Output Port Prioritization > From Other Ports)

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ EXT Output Settings

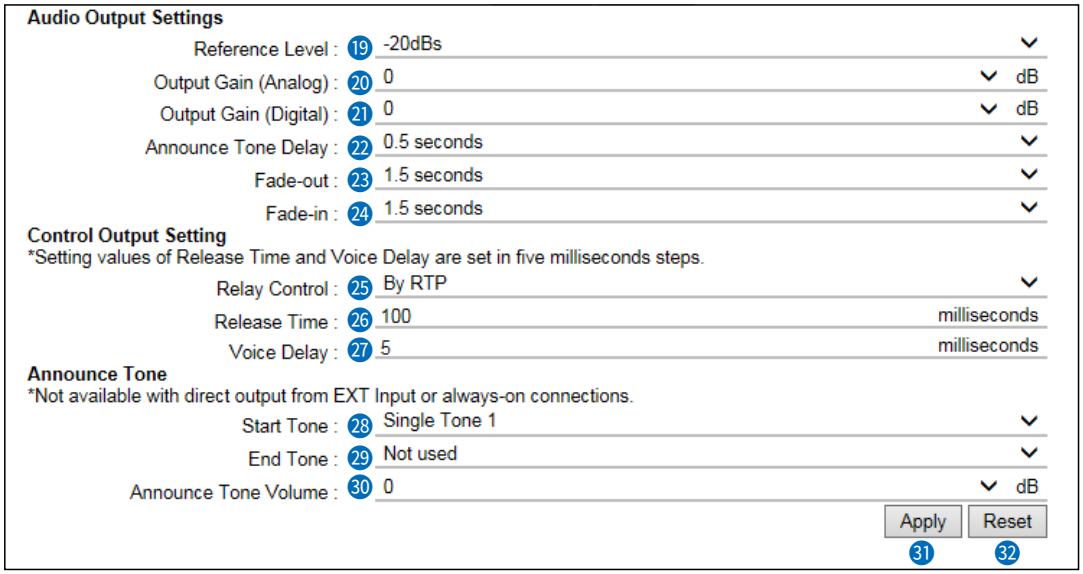

24 Fade-in ..... Set the period of time that the audio signal mute is canceled.
(Default: 1.5 seconds)

- Range: Disable, or 0.5 ~ 3 (seconds)

The Auto Fader function is usable on the following settings.

- When the “Connected Unit” is set to “EXT I/O Unit,” and “EXT I/O Port Mode” is set to “Separate.” (Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode)
  - ⓘ The “Input Connection Port” is set to “EXT Output.” (External input and output ports are directly connected.) (Connection Port Settings > EXT I/O (EXT) > EXT Input Settings > Input Connection Port)
- The “From Other Ports” is set to “Priority” or “High Priority.” (PBX Advanced Settings > Prioritization > EXT Output Port Prioritization > From Other Ports)

25 Relay Control ..... Displayed when Switching Control (1) is set to “Relay Circuit.”
Set the type of relay control. (Default: By RTP)
Options: By Port Connection or By RTP

26 Release Time ..... Set the RX delay time. It is the delay time for the VOX switch to turn OFF after no audio signal is received through the network.
(Default: For the Control Output Circuit: 200
For the Relay Circuit: 100)

- Range: For the control output circuit: 5 ~ 2000 (milliseconds)
  For the relay circuit: 5 ~15000 (milliseconds)

27 Voice Delay ..... Enter the period of time to store the audio. (Default: 5)

- Range: 0 ~ 1500 (milliseconds) in 5 millisecond steps.

EXT I/O (EXT) screen

Connection Port Settings > EXT I/O (EXT)

■ EXT Output Settings

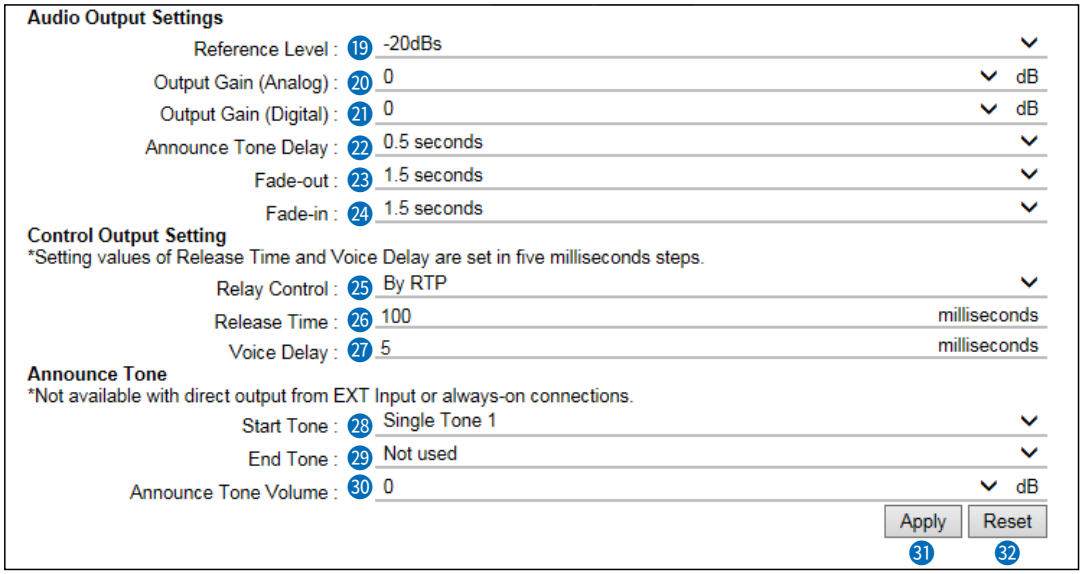

28 Start Tone ..... Select the tone which sounds before the announcement starts. (Default: Single Tone1)
- Options: Not used, 4 Tone Notice (Up), Single Tone 1, or Single Tone 2

29 End Tone ..... Select the tone which sounds after the announcement. (Default: Not used)
- Options: Not used, 4 Tone Notice (Down), Single Tone 1, or Single Tone 2

30 Announce Tone Volume ... Select the volume level for the announce tones. (Default: 0)
- Range: –12 ~ +6 (dB)

31 <Apply> ..... Click to apply the settings.

32 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Emergency Notification screen

Connection Port Settings > Emergency Notification

■ Bridge Communication

Edit the Emergency Notification settings for the transceivers connected by Bridge Mode.

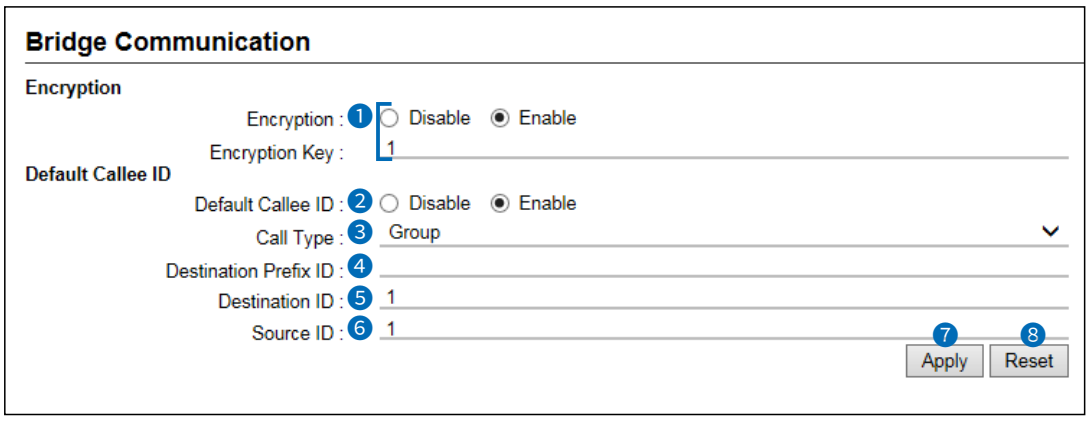

ⓘ ❸ ~❻ Displayed only when the Default Callee ID (❷) is set to “Enable.”

❶Encryption ..... Select whether or not to enable the Encryption function. (Default: Disable)
When you enable the function, enter an encryption key between 1 and 32767. (Default: 1)

❷Default Callee ID ..... Select “Enable” to add the destination ID to the transmitted signal. (Default: Disable)

❸Call Type ..... Select a call type. (Default: Group)
- Options: Individual, Group, or All

❹Destination Prefix ID ..... Enter a destination prefix ID. The ID may differ, depending on the system. (Default: Blank)
- Range: 0 ~30

❺Destination ID ..... Enter an Individual or Group ID of the destination transceiver between 1 and 9999999. (Default: 1)
ⓘ Enter an ID between 00001 and 99999 when the Destination Prefix ID (❹) is entered.

❻Source ID ..... Enter a station’s source ID between 1 and 9999999. The ID is sent to the destinations. (Default: 1)

❼<Apply> ..... Click to apply the settings.

❽<Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Microphone (MIC) screen

Connection Port Settings > Microphone (MIC)

■ Bridge Communication

Edit the settings of the microphone connected to the RoIP Gateway.

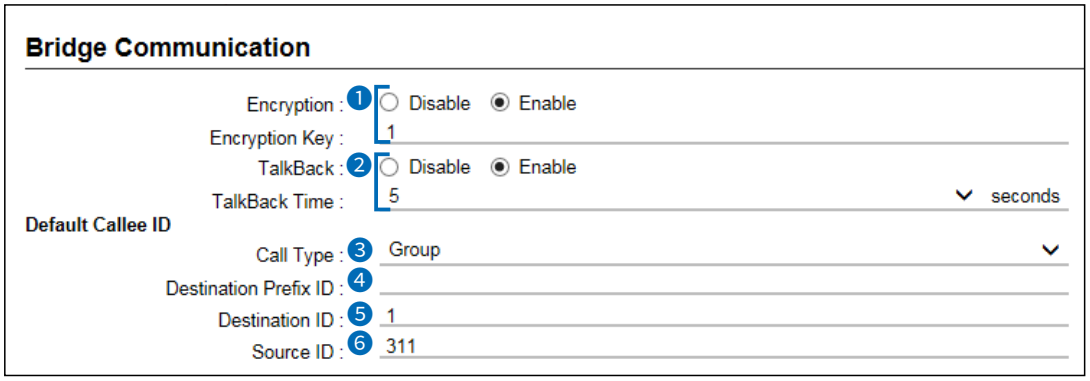

❶ Encryption ..... Select whether or not to enable the Encryption function. (Default: Disable)
When you enable the function, enter an encryption key between 1 and 32767. (Default: 1)

❷ TalkBack ..... Select whether or not to enable the TalkBack function.(Default: Enable)
When the function is enabled, Select the TalkBack time. (Default: 5)
- Range: 1 ~10 (seconds)

❸ Call Type ..... Select a call type. (Default: Group)
- Options: Individual, Group, or All

❹ Destination Prefix ID ..... Enter a destination prefix ID. The ID may differ, depending on the system. (Default: Blank)
- Range: 0 ~30

❺ Destination ID ..... Enter an Individual or Group ID of the destination transceiver between 1 and 9999999. (Default: 1)
ⓘ Enter an ID between 00001 and 99999 when the Destination Prefix ID (❹) is entered.

❻ Source ID ..... Enter a station's source ID between 1 and 9999999. The ID is sent to the destinations. (Default: 311)

Microphone (MIC) screen

Connection Port Settings > Microphone (MIC)

■ Microphone Control

Edit the input/output settings of the microphone connected to the RoIP Gateway.

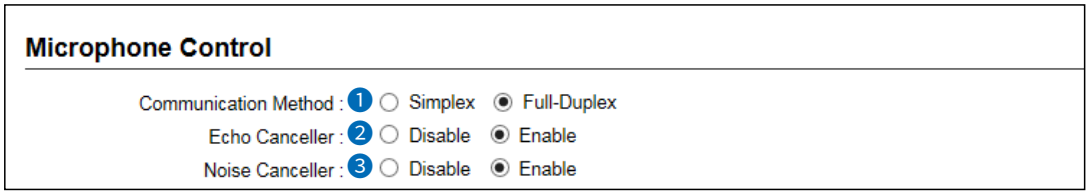

❶Communication Method … Select the communication method for the microphone. (Default: Full-Duplex)

❷Echo Canceller …… Select whether or not to enable the Echo Canceller function. The function reduces echo caused while duplex communication. (Default: Enable)

❸Noise Canceller …… Select whether or not to enable the Noise Canceller. (Default: Enable)

Microphone (MIC) screen

Connection Port Settings > Microphone (MIC)

■ Microphone Input Control

Edit the input setting of the microphone connected to the RoIP Gateway.

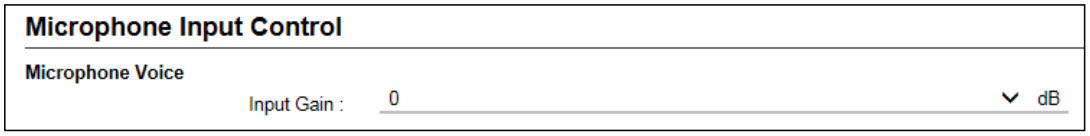

Input Gain ..... Select the input gain for the microphone. (Default: 0)
- Range: –12 ~ +6 (dB)

Microphone (MIC) screen

Connection Port Settings > Microphone (MIC)

■ Voice Output Control

Edit the voice output control settings of the microphone connected to the RoIP Gateway.

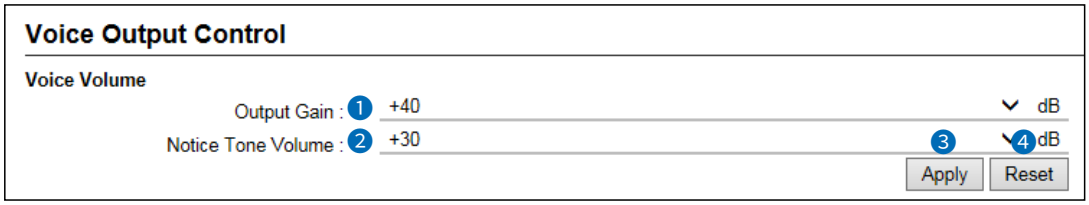

1 Output Gain ..... Select the output gain for the microphone. (Default: +40)
- Range: 0 ~ +63 (dB)

2 Notice Tone Volume ..... Adjust the Notice Tone volume. (Default: +30)
- Range: 0 ~ +63 (dB)

3 <Apply> ..... Click to apply the settings.

4 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

RoIP Gateway screen

Connection Port Settings > RoIP Gateway

■ RoIP Gateway Mode

Set the RoIP Gateway Mode.

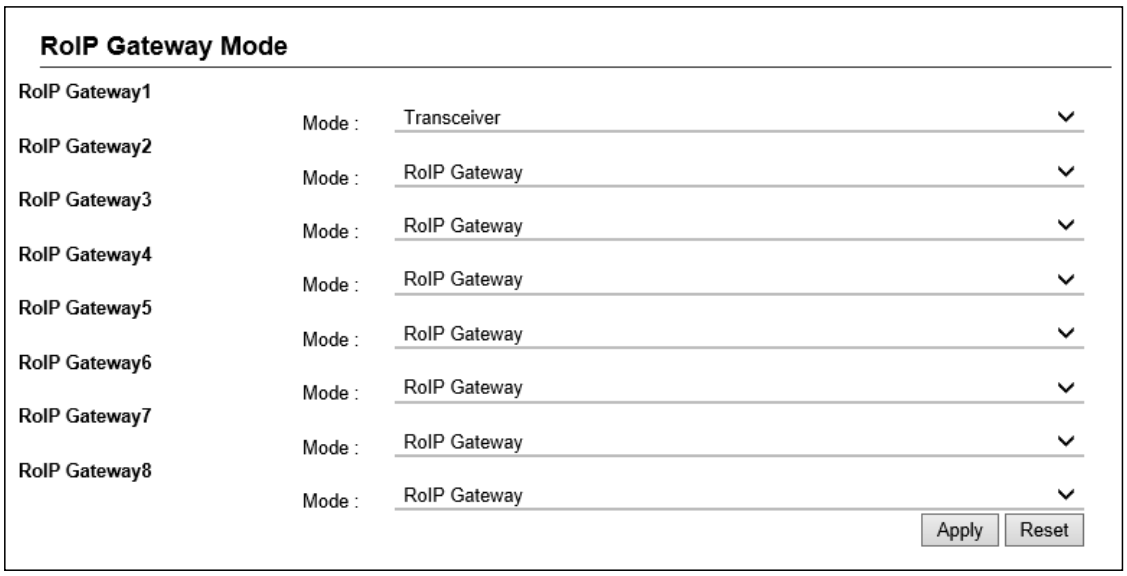

Mode ..... Select the connected device to “RoIP Gateway” or “Transceiver” for the RoIP Gateway 1 ~ 8, and then click <Apply> to set.
(Default: RoIP Gateway)

ⓘ Changing this setting initializes the port settings.

Connection Port Settings > RoIP Gateway

■ RoIP Gateway

Select a RoIP gateway port to edit the settings.

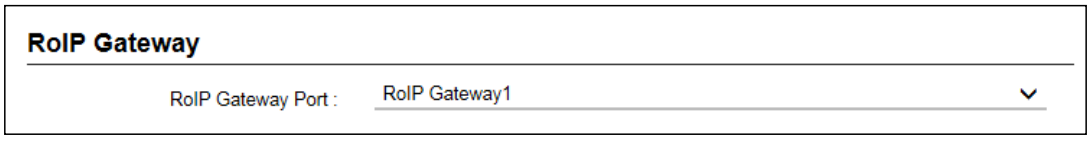

RoIP Gateway Port ..... Select a RoIP gateway port to edit the settings.
(Default: RoIP Gateway1)

RoIP Gateway screen

Connection Port Settings > RoIP Gateway

■ RoIP Gateway Connection (Mode: RoIP Gateway)

The settings for destinations that are connected to the RoIP Gateway through the RoIP gateway connection.

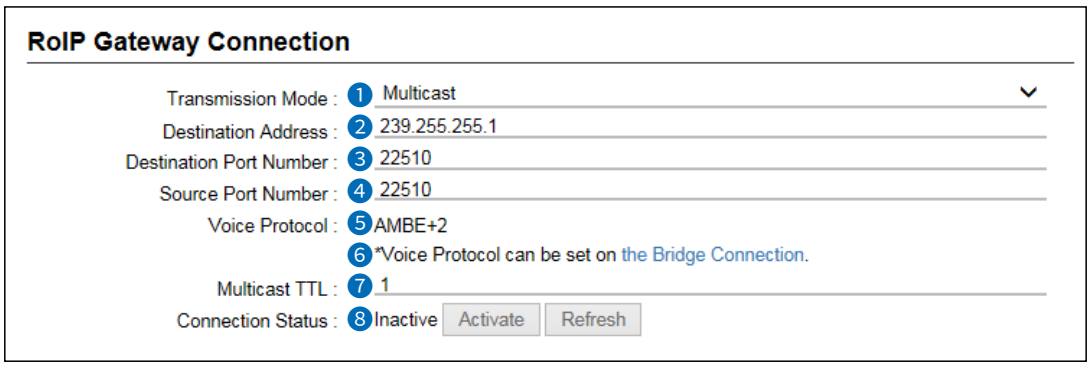

ⓘ ❻ is displayed only when the Transmission Mode (❶) is set to “Multicast.”

❶ Transmission Mode ..... Select the transmission mode used on the network, for devices connected to the RoIP Gateway.

❷ Destination Address ..... Enter the IP address or domain of the RoIP Gateway that going to be connected.
When the Transmission Mode (❶) is set to “Multicast,” automatically set to “239.255.255.1.”

❸ Destination Port Number Enter the same port number as the Source Port Number (❹) of the RoIP Gateway to be connected.
(Default for RoIP Gateway1: 24400
Default for RoIP Gateway2: 24402
Default for RoIP Gateway3: 24404
Default for RoIP Gateway4: 24406
Default for RoIP Gateway5: 24408
Default for RoIP Gateway6: 24410
Default for RoIP Gateway7: 24412
Default for RoIP Gateway8: 24414)

ⓘ Enter the port number between 2 and 65534, in even number.
ⓘ Do not conflict with the other port settings.
ⓘ In the Multicast mode, all the default setting are fixed to “25210.”

RoIP Gateway screen

Connection Port Settings > RoIP Gateway

■ RoIP Gateway Connection (Mode: RoIP Gateway)

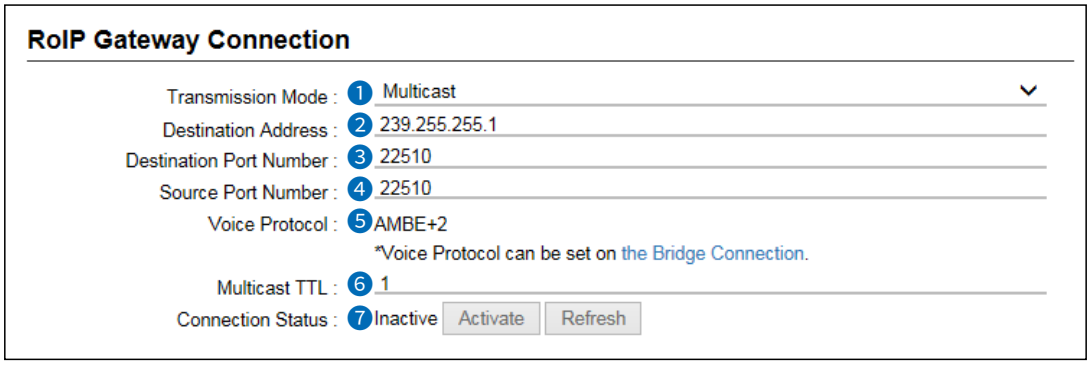

ⓘ ❻ is displayed only when the Transmission Mode (❶) is set to “Multicast.”

❹ Source Port Number ……

Enter a port number to receive an audio signal.
ⓘ Used as a source port number for an audio signal.
ⓘ Enter a port number between 1024 and 65534, in even number.
ⓘ Do not conflict with the other port settings.
ⓘ In the Multicast mode, all the default setting are “22510.”
(Default for RoIP Gateway1: 24400
Default for RoIP Gateway2: 24402
Default for RoIP Gateway3: 24404
Default for RoIP Gateway4: 24406
Default for RoIP Gateway5: 24408
Default for RoIP Gateway6: 24410
Default for RoIP Gateway7: 24412
Default for RoIP Gateway8: 24414)

❺ Voice Protocol ……

Displays the Voice Protocol Selected in the “Voice Protocol (For Custom Bridge Connection)” (Bridge Connection Settings > Bridge Connection > AMBE+2 Vocoder Assignment > Voice Protocol (For Custom Bridge Connection))

❻ Multicast TTL ……

Enter the Time to Live value (TTL). TTL is used to control the Multicast packet delivery scope. Every time the packets pass through the router, this value subtracted. When the value is “0,” the packets are discarded.
(Default: 1)

• Range: 1 ~ 255

❼ Connection Status ……

Click to connect or disconnect the RoIP Gateway, or to refresh the connection status.
ⓘ The buttons are grayed out when Connected Repeater’s Address is blank.
ⓘ The settings cannot be changed while connection is established. Click <Deactivate> before changing the settings on this screen.

RoIP Gateway screen

Connection Port Settings > RoIP Gateway

■ RoIP Gateway Communication (Mode: RoIP Gateway)

Edit settings for the connected RoIP Gateway to communicate.

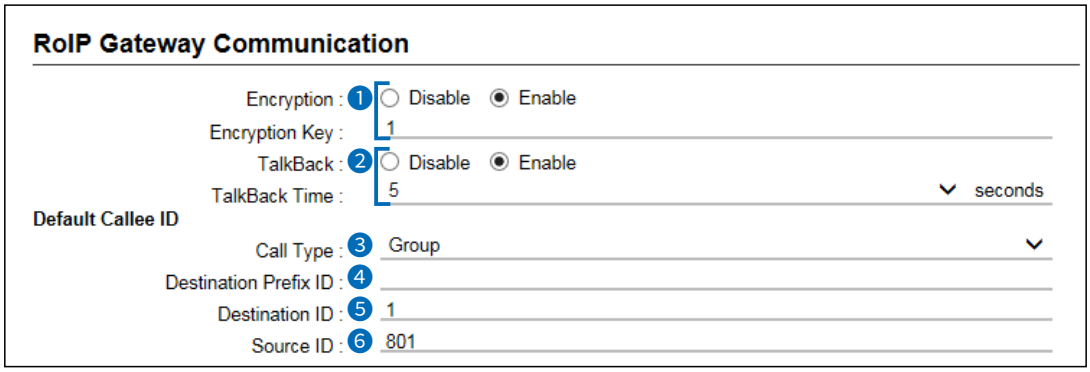

❶ Encryption ..... Select whether or not to enable the Encryption function. (Default: Disable)
When you enable the function, enter an encryption key between 1 and 32767. (Default: 1)

❷ TalkBack ..... Select whether or not to enable the TalkBack function with devices connected to the RoIP Gateway. (Default: Enable)
When the function is enabled, Select the TalkBack time. (Default: 5)
- Range: 1 ~10 (seconds)

❸ Call Type ..... Select a call type. (Default: Group)
- Options: Individual, Group, or All

❹ Destination Prefix ID ..... Enter a destination prefix ID. The ID may differ, depending on the system. (Default: Blank)
- Range: 0 ~30

❺ Destination ID ..... Enter the default ID for the EXT port between 1 and 9999999. (Default: 1)

ⓘ Enter an ID between 00001 and 99999 when the Destination Prefix ID (❹) is entered.

❻ Source ID ..... Enter a station's source ID between 1 and 9999999. The ID is sent to the destinations.

(Default for RoIP Gateway1: 801
Default for RoIP Gateway2: 802
Default for RoIP Gateway3: 803
Default for RoIP Gateway4: 804
Default for RoIP Gateway5: 805
Default for RoIP Gateway6: 806
Default for RoIP Gateway7: 807
Default for RoIP Gateway8: 808)

RoIP Gateway screen

Connection Port Settings > RoIP Gateway

■ RoIP Gateway Control (Mode: RoIP Gateway)

Edit settings for the connected RoIP Gateway to communicate.

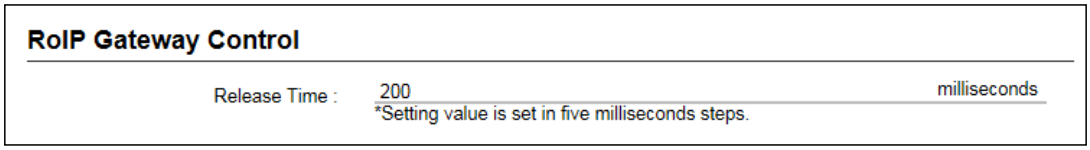

Release Time ..... Enter the period of time to detect the audio output stoppage to the RoIP Gateway. (Default: 200)

- Range: 5 ~ 2000 (milliseconds) in 5 second steps

RoIP Gateway screen

Connection Port Settings > RoIP Gateway

■ Transceiver Model (Mode: Transceiver)

Displayed when the RoIP Gateway Mode is set to “Transceiver” to the selected RoIP Gateway Port.

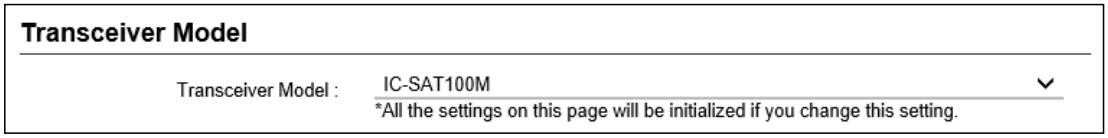

Transceiver Model …… Select the selected Transceiver Model from the list.
(Default: IC-SAT100M)
ⓘ As of April 2026, Only the IC-SAT100M is selectable.

RoIP Gateway screen

Connection Port Settings > RoIP Gateway

■ Transceiver Connection Mode: Transceiver

Displayed when the RoIP Gateway Mode is set to “Transceiver” to the selected RoIP Gateway Port.



❶ Destination Address ..... Enter the IP Address of the connected transceiver.

❷ Voice Port Number ..... Enter the Voice Port Number of the connected transceiver.
ⓘ Enter a port number between 2 and 65534, in even number, except some reserved port numbers.
ⓘ Do not conflict with the other port settings.
(Default for RoIP Gateway1: 51000
Default for RoIP Gateway2: 51002
Default for RoIP Gateway3: 51004
Default for RoIP Gateway4: 51006
Default for RoIP Gateway5: 51008
Default for RoIP Gateway6: 51010
Default for RoIP Gateway7: 51012
Default for RoIP Gateway8: 51014)

❸ Control Port Number ..... Enter the Control Port Number of the connected transceiver.
ⓘ Enter a port number between 1 and 65534, except some reserved port numbers.
ⓘ Do not conflict with the other port settings.
(Default: 53000)

❹ Connection Status..... Displays the connection status to the transceiver that is entered in Destination Address (❶).
Click <Connect> to start connecting to the transceiver.
ⓘ While connecting and connected to the transceiver, the settings ❶ ~ ❸ are grayed out and cannot be edited.
Click <Refresh> to refresh the status.
Click <Disconnect> to disconnect and edit the Transceiver Connection settings.

RoIP Gateway screen

Connection Port Settings > RoIP Gateway

■ Bridge Communication Mode: RoIP Gateway

The settings for the Bridge Communication when a Bridge Connection Destination is set to “Custom Bridge Connection.” (Bridge Connection Settings > Bridge Connection > Bridge Connection > Bridge Connection Destination)

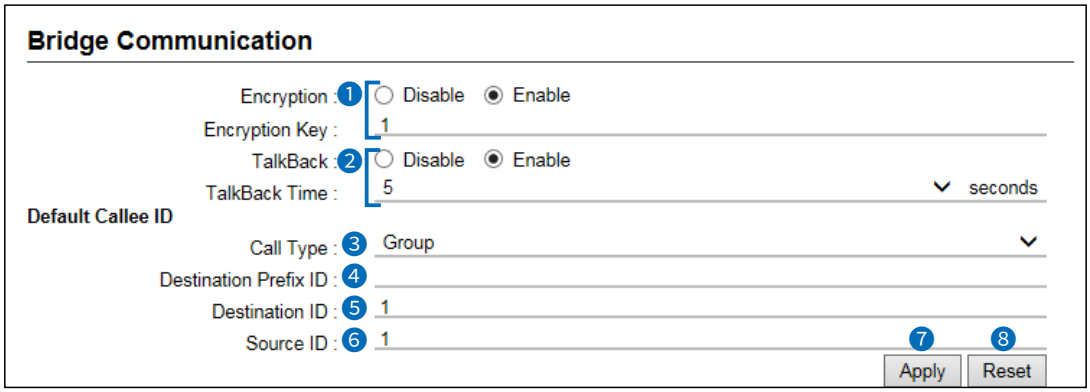

❶ Encryption ..... Select whether or not to enable the Encryption function, depending on the connected transceiver’s setting. (Default: Disable)
When you enable the function, enter an encryption key between 1 and 32767. (Default: 1)

❷ TalkBack ..... Select whether or not to enable the TalkBack function with devices connected to the RoIP Gateway. (Default: Enable)
When the function is enabled, Select the TalkBack time. (Default: 5)

- Range: 1 ~ 10 (seconds)

❸ Call Type ..... Select a call type. (Default: Group)

- Options: Individual, Group, or All

❹ Destination Prefix ID ..... Enter a destination prefix ID. The ID may differ, depending on the system.

- Range: 0 ~30

❺ Destination ID ..... Enter an Individual or Group ID for the destination transceiver between 1 and 9999999. (Default: 1)

ⓘ Enter an ID between 00001 and 99999 when the Destination Prefix ID (❹) is entered.

❻ Source ID ..... Enter the station’s source ID between 1 and 9999999. Used for calling transceivers connected to the serial port. (Default: 1)

❼ <Apply> ..... Click to apply the settings.

❽ <Reset> ..... Click to reset the settings.

ⓘ You cannot reset after clicking <Apply>.

RoIP Gateway screen

Connection Port Settings > RoIP Gateway

■ Bridge Communication **Mode: Transceiver**

The settings for the Bridge Communication when a Bridge Connection Destination is set to “Custom Bridge Connection.” (Bridge Connection Settings > Bridge Connection > Bridge Connection > Bridge Connection Destination)

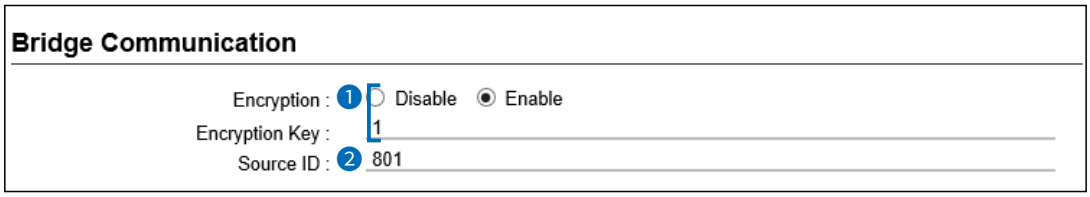

❶Encryption ..... Select whether or not to enable the Encryption function, depending on the connected transceiver’s setting. (Default: Disable)
When you enable the function, enter an encryption key between 1 and 32767. (Default: 1)

❷Source ID ..... Enter the station’s source ID between 1 and 9999999. Used for calling transceivers connected to the serial port.
(Default for RoIP Gateway1: 801
Default for RoIP Gateway2: 802
Default for RoIP Gateway3: 803
Default for RoIP Gateway4: 804
Default for RoIP Gateway5: 805
Default for RoIP Gateway6: 806
Default for RoIP Gateway7: 807
Default for RoIP Gateway8: 808)

RoIP Gateway screen

Connection Port Settings > RoIP Gateway

■ Transceiver Control

The control settings for the Transceiver connected to the RoIP Gateway 1 ~ 8 port.
ⓘ Displayed when the Mode of the selected RoIP Gateway port is set to “Transceiver.”

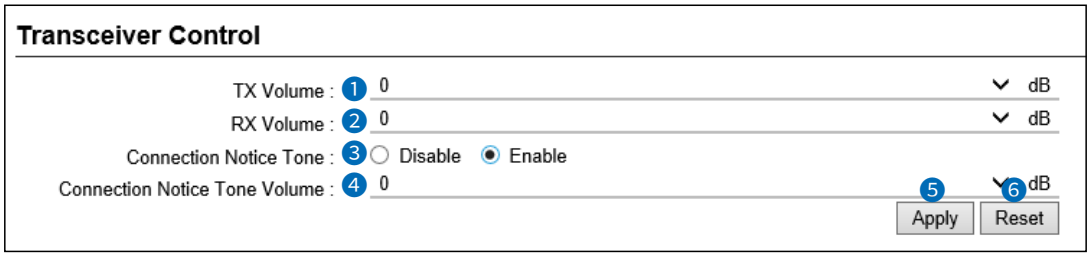

ⓘ 4 is displayed only when 3 is set to Enable.

1 TX Volume ..... Set the transceiver’s transmitting audio level. (Default: 0)
- Range: –12 (minimum) ~ +6 (maximum) (dB)

2 RX Volume ..... Set the transceiver’s receiving audio level. (Default: 0)
- Range: –12 (minimum) ~ +6 (maximum) (dB)

3 Connection Notice Tone ... Select Whether or not to notify the connection status (success or failure) to the transceiver connected to the RoIP Gateway to the caller with a notice tone. (Default: Disable)
When enabling this item, a caller can receive a notification tone during ringing.
The RoIP Gateway alerts as a failure when:
- The connection status is other than “Connected.” (Connection Port Settings > RoIP Gateway > Transceiver Connection > Connection Status)
- The IC-SAT100M could not connect to any satellites.

4 Connection Notice Tone Volume ..... Adjust the Connection Notice Tone audio level that is sent to the source transceiver. (Default: 0)
- Range: –12 ~ +6 (dB)

5 <Apply> ..... Click to apply the settings.

6 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

DESTINATION SETTINGS

Section 8

SelCall Number Converting screen 8-2
- ■ Save or Write the SelCall Number Converting Setting 8-2
- ■ About the SelCall Number Converting 8-3
- ■ SelCall Number Converting 8-4
- ■ List of SelCall Number Converting Entries 8-5

Destination Settings screen 8-6
- ■ Destination Settings (All) 8-6
- ■ Destination Settings (Group) 8-9
- ■ Destination Settings (Talkgroup) 8-13
- ■ Destination Settings (Individual) 8-19
- ■ Destination Settings (Telephone) 8-21
- ■ List of Destination Setting Entries (All Call) 8-22
- ■ List of Destination Setting Entries (Group Call) 8-22
- ■ List of Destination Setting Entries (Talkgroup Call) 8-23
- ■ List of Destination Setting Entries (Multiplex Talkgroup Call) 8-24
- ■ List of Destination Setting Entries (Individual Call) 8-25
- ■ List of Destination Setting Entries (Telephone) 8-26
- ■ Destination Batch Setting 8-27

SelCall Number Converting screen

Destination Settings > SelCall Number Converting

■ Save or Write the SelCall Number Converting Setting

You can load or save the converting settings.

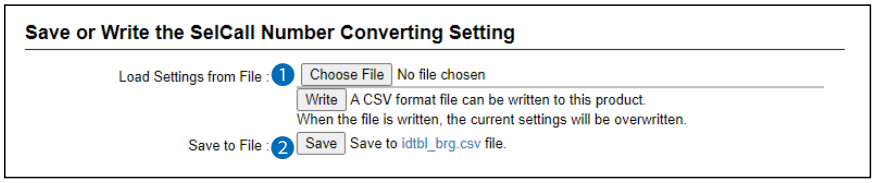

❶ Load Settings from File … You can load the saved [SelCall Number Converting file] (Extension: csv) file, and write it to the RoIP Gateway.
Click <Choose File>, and select the SelCall Number Converting file (Example: idtbl_brg.csv) to load.
Verify that the selected file is displayed, and then click <Write>.

ⓘ The content of the file is loaded to [List of SelCall Number Converting Entries].
ⓘ When the setting file (Extension: sav) is used to restore the settings, the settings of the RoIP Gateway will be overwritten.

❷ Save to File …… Click to save the [List of SelCall Number Converting Entries] contents in the PC, as the “SelCall Number Converting file (Extension: csv).”

SelCall Number Converting screen

Destination Settings > SelCall Number Converting

■ About the SelCall Number Converting

When a SelCall number is shared beyond the site, you can't call transceivers across the site due to “SelCall number duplication.” The SelCall Number Convert function solves this problem by automatically converting the SelCall number.

Here is an example to show how the function works.
The transceiver (ID number: 1) in Area A is calling the transceiver (ID number: 2) in Area B using a provisionally assigned SelCall number (9002).
The provisionally assigned SelCall number is converted into the actual one (9002 to 2), according to the number conversion table. Therefore, they can talk to each other across the sites.
At the same time, the ID number of the transceiver in Area A is also converted, based on the list of SelCall Number Converting entries registered in Area A's RoIP Gateway (1 to 8001). The converted number (8001) is displayed on the transceiver in Area B.

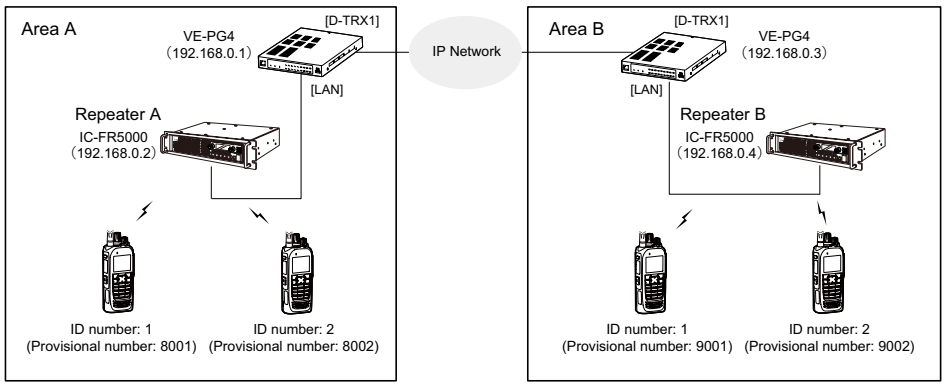

• The conversion table for the above example. (Area A)

List of SelCall Number Converting Entries

Index	Name	Destination			Convert Destination				
		Call Type	Prefix ID	ID	Call Type	Prefix ID	ID		
1	Destination (Area B Sales Dept)	Individual		9001	Individual		1	Edit	Delete
2	Destination (Area B Sales Dept)	Individual		9002	Individual		2	Edit	Delete
3	Destination (Area A Sales Dept)	Individual		1	Individual		8001	Edit	Delete
4	Destination (Area A Sales Dept)	Individual		2	Individual		8002	Edit	Delete

• The conversion table for the above example. (Area B)

List of SelCall Number Converting Entries

Index	Name	Destination			Convert Destination				
		Call Type	Prefix ID	ID	Call Type	Prefix ID	ID		
1	Destination (Area A Sales Dept)	Individual		8001	Individual		1	Edit	Delete
2	Destination (Area A Sales Dept)	Individual		8002	Individual		2	Edit	Delete
3	Destination (Area B Sales Dept)	Individual		1	Individual		9001	Edit	Delete
4	Destination (Area B Sales Dept)	Individual		2	Individual		9002	Edit	Delete

ⓘ We do not recommend using duplicate individual numbers between bases.
ⓘ You need to register both entries of the destination information and the source information.

SelCall Number Converting screen

Destination Settings > SelCall Number Converting

■ SelCall Number Converting

Even when a SelCall number is shared in several sites, you can call a radio in a different site by using the provisionally assigned SelCall destination ID.

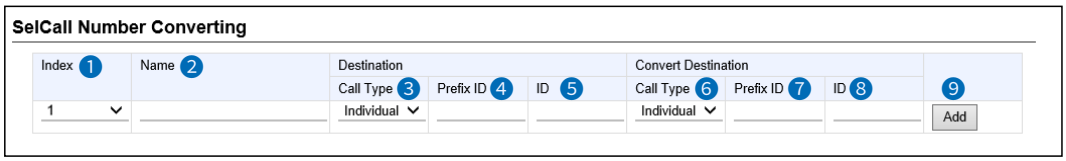

❶Index ..... The Index assigned for the entry. (Default: 1)
Index range: 1 ~ 1000

❷Name ..... Enter a name of up to 31 characters.

❸Call Type (Destination)..... Select the type of call. (Default: Individual)
- **Individual**: Virtually call a specified transceiver.
- **Group**: Virtually call all transceivers that belong to the specified group.
- **All**: Call all transceivers.

❹Prefix ID (Destination) ..... Enter the SelCall prefix ID.
- Range: 0 ~ 30

❺ID (Destination) ..... Enter a provisionally assigned SelCall destination ID.
ID range differs, Depending on the system mode.

ⓘ When “All” is selected in [Call Type (Destination)] (❸), This item’s color changes to gray, and you cannot change the setting.

❻Call Type (Convert Destination) Select the call type. (Default: Individual)
- **Individual**: Call only one transceiver.
- **Group**: Call all transceivers that belong to the specified group.
- **All**: Call all transceivers.

❼Prefix ID (Convert Destination) Enter the SelCall destination’s prefix ID.
- Range: 0 ~ 30

❽ID (Convert Destination) ... Enter the ID of the SelCall destination.
ID range differs, Depending on the system mode.

ⓘ When “All” is selected in [Call Type (Convert Destination)] (❻), this item’s color changes to gray, and you cannot change the setting.

❾<Add> ..... Click to add the entry.
ⓘ The registered contents are displayed on the [List of SelCall Number Converting Entries] screen.

SelCall Number Converting screen

Destination Settings > SelCall Number Converting

■ List of SelCall Number Converting Entries

Lists the SelCall Number Converting settings.

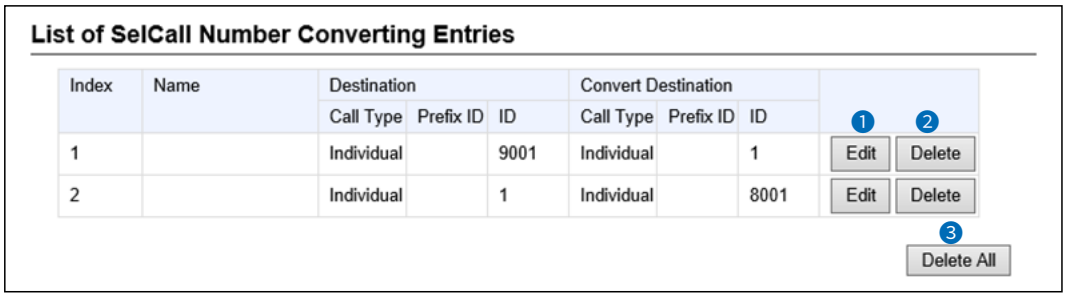

❶ **<Edit>** ..... Click to edit the entry.
ⓘ The registered contents are displayed in [SelCall Number Converting].

❷ **<Delete>** ..... Click to delete the entry.
ⓘ You cannot restore after clicking <Delete>.

❸ **<Delete All>** ..... Click to delete all of the entries.
ⓘ You cannot restore after clicking <Delete All>.

Destination Settings screen

Destination Settings > Destination Settings

■ Destination Settings (All)

The settings to call all the registered WLAN transceivers, RC-FS20s, and IP100FSs.
If necessary, you can include other bases connections, IP transceiver controllers, and transceiver ports. (Up to 22 locations, excluding the IP transceiver controller)

ⓘ This screen is displayed when clicking [Edit] of [List of Destination Setting Entries (All Call)].

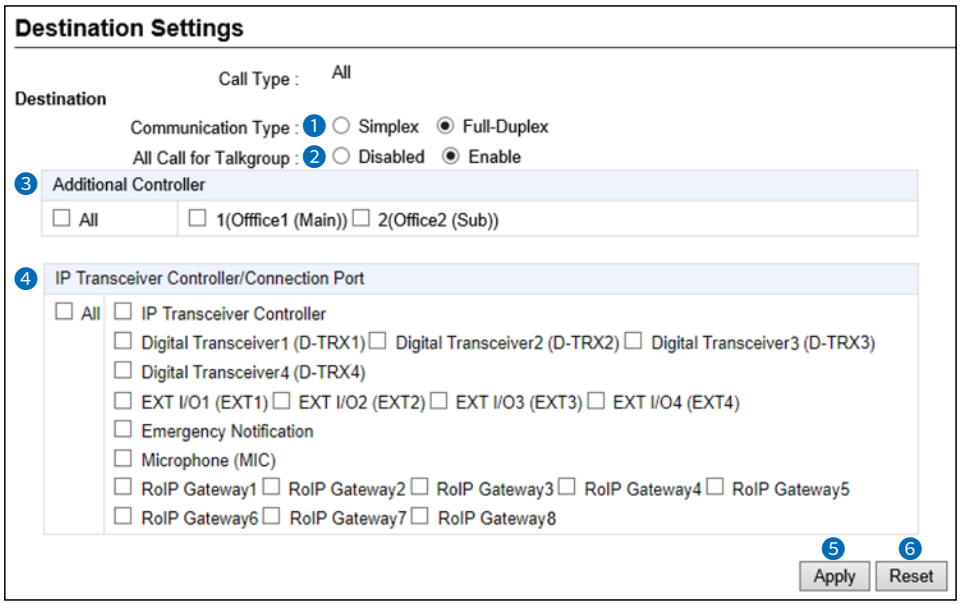

This is an example of setting “All” as the Call Type.

1 Communication Type …… Select “Simplex” or “Full-Duplex.” (Default: Full-Duplex)

- **Simplex operation**

ⓘ When “Simplex” is selected, the called station cannot reply until the caller station stops transmitting.

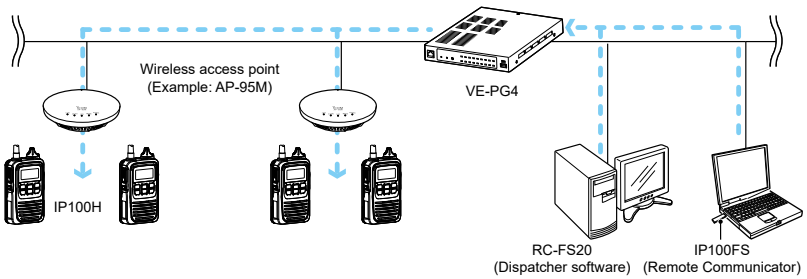

- **Full-Duplex operation**

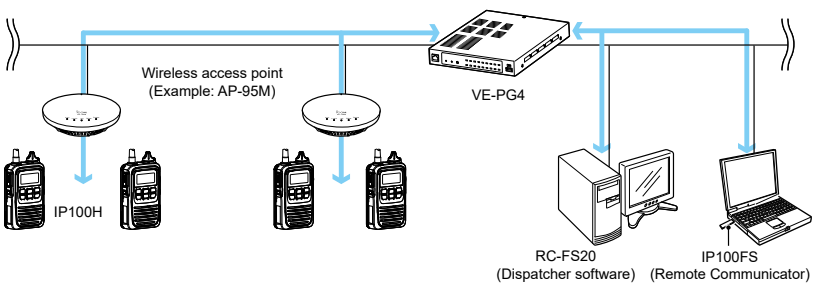

Destination Settings screen

Destination Settings > Destination Settings

■ Destination Settings (All)

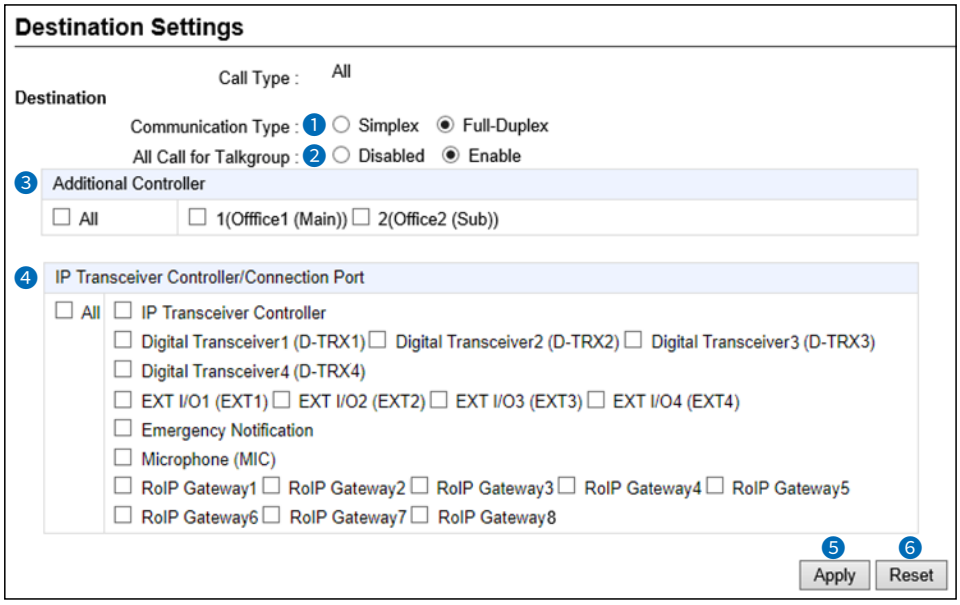

This is an example of setting “All” as the Call Type.

2 All Call for Talkgroup ..... Select whether or not the All call includes the WLAN transceivers, RC-FS20s, and IP100FSs that belong to the Talkgroup.
(Default: Enable)

3 Additional Controller ..... Select the additional controller when configuring multiple controllers to enable All call between the different controllers.

ⓘ By clicking “All,” you can select or cancel all entries in the list.

ⓘ When “Sub” is selected in the [Additional Controller Settings] setting (Transceiver Controller > RoIP Settings > Additional Controller Settings), specify the master controller as the connection destination, as shown below.



ⓘ The other bases in [Additional Controller] (3) and [IP Transceiver Controller/Connection Port] (4) can be connected to a total of up to 22 locations. (“IP Transceiver Controller” is not included this number of connections.) If you connect the other bases to more than 22 locations, you cannot communicate properly.

Destination Settings screen

Destination Settings > Destination Settings

■ Destination Settings (All)

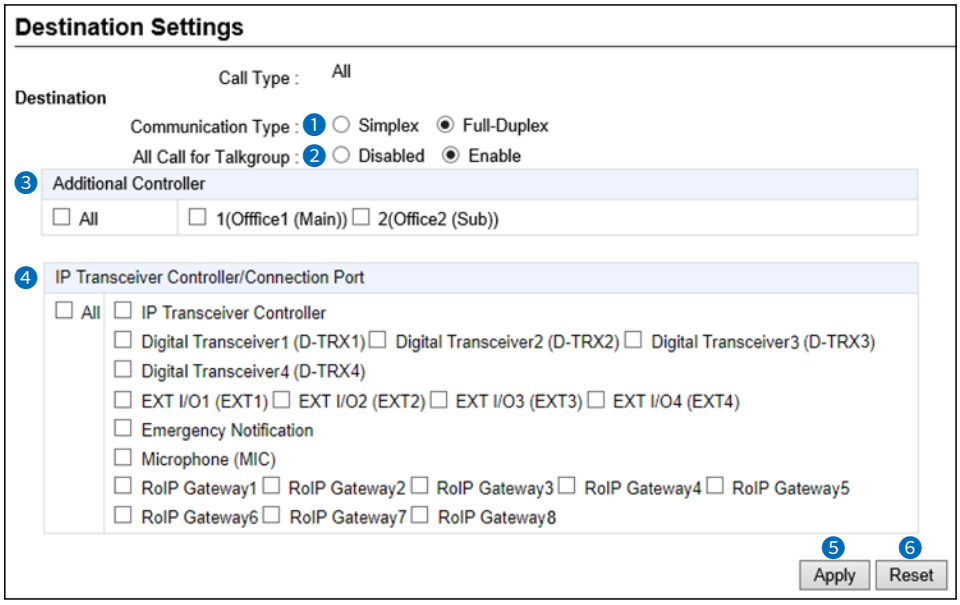

This is an example of setting “All” as the Call Type.

4 IP Transceiver Controller/ Connection Port……

Select the communication devices.
- **IP Transceiver Controller*1**
- **Digital Transceiver1 (D-TRX1) ~ Digital Transceiver4 (D-TRX4)**
- **EXT I/O1 (EXT1) ~ EXT I/O4 (EXT4)*2**
- **Emergency Notification**
- **Microphone (MIC)**
- **RoIP Gateway1 ~ RoIP Gateway8**

*1 Displayed when an IP Transceiver Controller is connected.

*2 When [Connected Unit] is set to “EXT I/O Unit” and [EXT I/O Port Mode] is set to “Separate” in [EXT I/O Port Mode] setting (Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode), “EXT Input” and “EXT Output” are displayed.

ⓘ When clicking “All,” you can select or cancel all at once.

ⓘ When a speaker microphone is connected to the [MIC] port, the audio input/output of the [EXT1] port is disconnected.
The Audio input/output of the [MIC] port and the [EXT1] port cannot be used at the same time.

ⓘ The other bases in [Additional Controller] (3) and [IP Transceiver Controller/ Connection Port] (4) can be connected to a total of up to 22 locations.
(“IP Transceiver Controller” is not included this number of connections.)
If you connect the other bases to more than 22 locations, you cannot communicate properly.

5 <Apply> ……

Click to apply the entries.

ⓘ The registered contents are displayed in [List of Destination Setting Entries (All Call)].

6 <Reset> ……

Click to reset the settings.

ⓘ You cannot reset after clicking <Apply>

Destination Settings screen

Destination Settings > Destination Settings

■ Destination Settings (Group)

The settings to call the registered group through the IP network or the RoIP Gateway's transceiver port.
ⓘ The displayed contents are changed according to the Call Type.

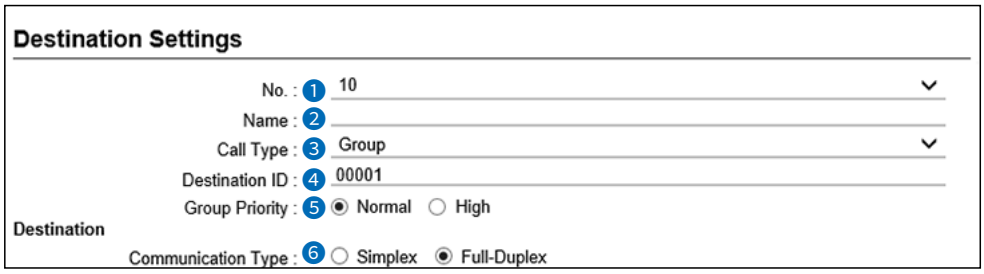

This is an example of setting "Group" as the Call Type (❸).

❶ No. ..... Select the number to register the destination Group.
Up to 1990 destinations can be registered.

❷ Name ..... Enter a destination name of up to 31 characters.

❸ Call Type ..... Select "Group" for Group calls.

❹ Destination ID ..... Enter a destination number.
• Range: 00001 ~ 60000

❺ Group Priority ..... Select "Normal" or "High" to set the priority in the Group call.
(Default: Normal)
ⓘ This item can be selected when "Group" is selected in [Call Type] (❸).

Destination Settings screen

Destination Settings > Destination Settings

■ Destination Settings (Group)

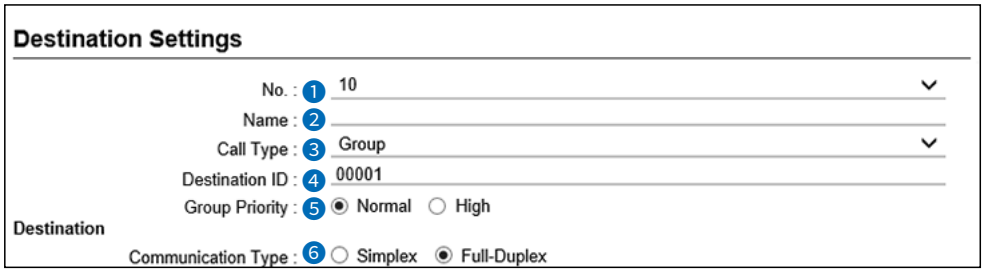

This is an example of setting “Group” as the Call Type (3).

6 Communication Type …… Select “Simplex” or “Full-Duplex.” (Default: Full-Duplex)

- **Simplex operation**

ⓘ When “Simplex” is selected, the called station cannot reply until the caller station stops transmitting.

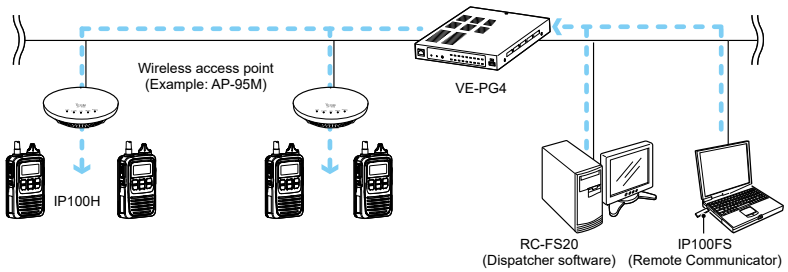

- **Full-Duplex operation**

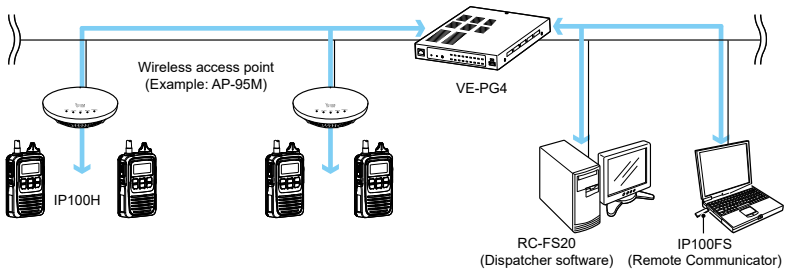

Destination Settings screen

Destination Settings > Destination Settings

■ Destination Settings (Group)

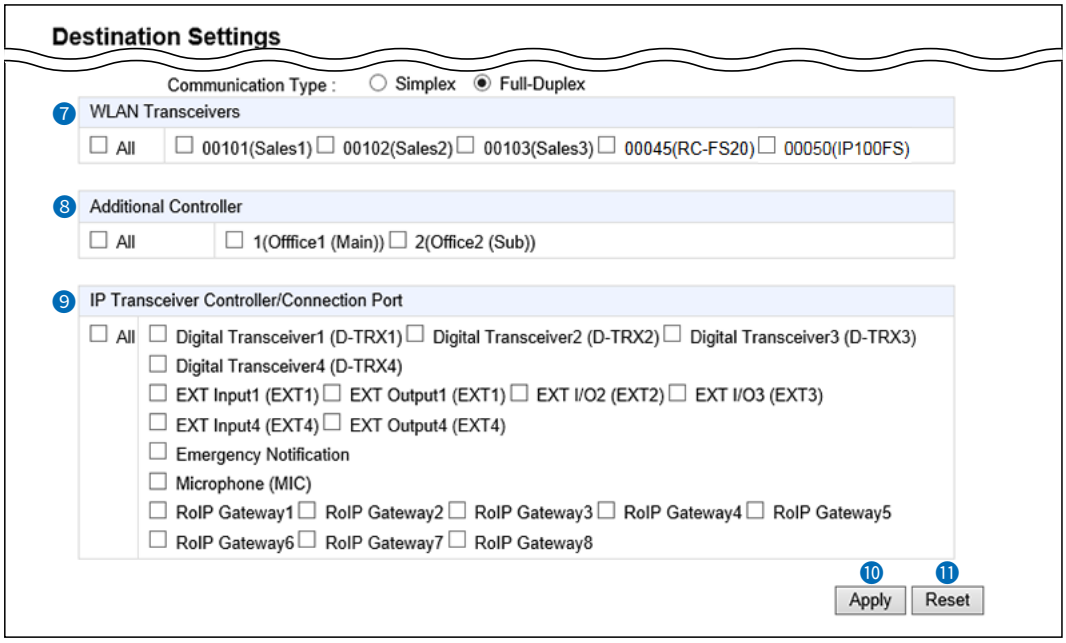

This is an example of setting “Group” as the Call Type (3).

7 WLAN Transceivers ..... Select the WLAN transceivers, RC-FS20s, and IP100FSs that belong the group from the list.

- ⓘ The WLAN transceivers, RC-FS20s, and IP100FSs added in [Transceiver Registration] are displayed.
- ⓘ By clicking “All,” you can select or cancel all at once.

8 Additional Controller ..... Select an additional controller when configuring several controllers, and the Group call calls between the different controllers.

- ⓘ By clicking “All,” you can select or cancel all entries in the list.
- ⓘ When “Sub” is selected in the [Additional Controller Settings] setting (Transceiver Controller > RoIP Settings > Additional Controller Settings), specify the master controller as the connection destination, as shown below.



- ⓘ The other bases in [Additional Controller] (8) and [IP Transceiver Controller/Connection Port] (9) can be connected to a total of up to 22 locations. (“IP Transceiver Controller” is not included in this number of connections.) If you connect other bases to more than 22 locations, you cannot communicate properly.

NOTE: When you use the Additional Controller Link function, set the other bases to be paired in the [Area Entry List] setting (Transceiver Controller > RoIP Server Settings > Area Call > Area Entry List).
For example, when the destination setting of Group 1 in the additional Controller 1 is set to additional Controller 2, the destination setting of Group 1 in the additional Controller 2 must be set to additional Controller 1.

- ⓘ The same applies in the case when the connection configuration between the other bases consists of the master controller and the multiple sub controllers.

Destination Settings screen

Destination Settings > Destination Settings

■ Destination Settings (Group)

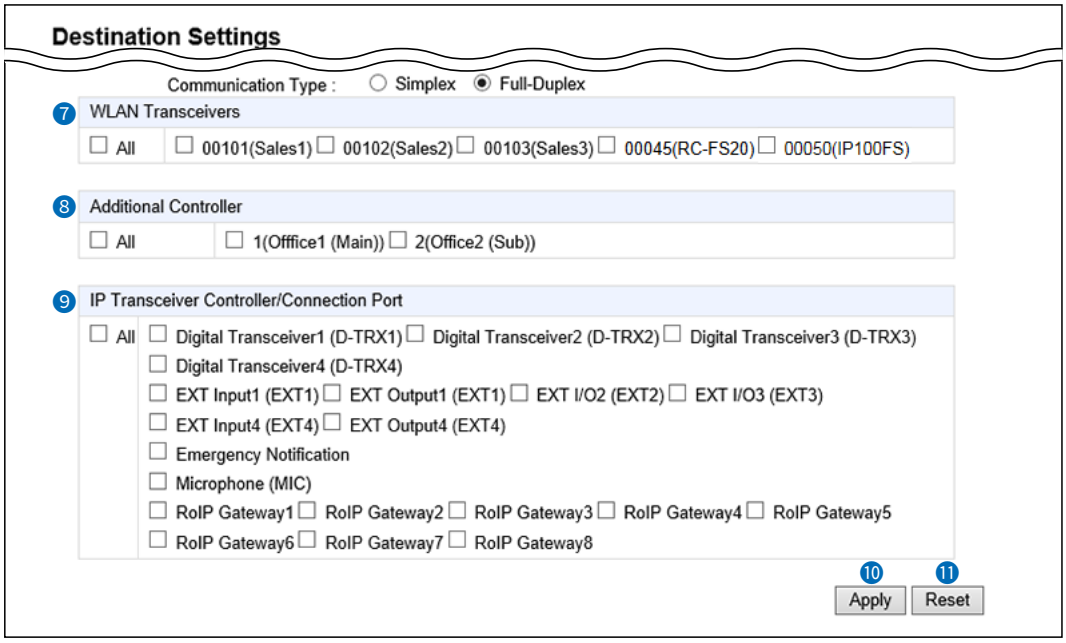

This is an example of setting “Group” as the Call Type (❸).

❾ IP Transceiver Controller/ Connection Port.....

Select the communication devices.

- **IP Transceiver Controller**[*1]
- **Digital Transceiver1 (D-TRX1) ~ Digital Transceiver4 (D-TRX4)**
- **EXT I/O1 (EXT1) ~ EXT I/O4 (EXT4)**[*2]
- **Emergency Notification**
- **Microphone (MIC)**
- **RoIP Gateway1 ~ RoIP Gateway8**

[*1] Displayed when an IP Transceiver Controller is connected.

[*2] When [Connected Unit] is set to “EXT I/O Unit” and [EXT I/O Port Mode] is set to “Separate” in [EXT I/O Port Mode] setting (Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode), “EXT Input” and “EXT Output” are displayed.

ⓘ By clicking “All,” you can select or cancel all at once.

ⓘ When a speaker microphone is connected to the [MIC] port, the audio input/output of the [EXT1] port is disconnected.
The Audio input/output of the [MIC] port and the [EXT1] port cannot be used at the same time.

ⓘ The other bases in [Additional Controller] (❽) and [IP Transceiver Controller/ Connection Port] (❾) can be connected to a total of up to 22 locations.
(“IP Transceiver Controller” is not included this number of connections.)
If you connect the other bases to more than 22 locations, you cannot communicate properly.

ⓘ For the EXT port that the IC-SAT100 is connected, you can belong to only a Group or Talkgroup.

❿ <Apply> ..... Click to apply the entries.

ⓘ The registered contents are displayed in [List of Destination Setting Entries (Group Call)].

⓫ <Reset> ..... Click to reset the settings.

ⓘ You cannot reset after clicking <Apply>.

Destination Settings screen

Destination Settings > Destination Settings

■ Destination Settings (Talkgroup)

The settings to call the registered Talkgroup through the IP network or the RoIP Gateway's transceiver port.
ⓘ The displayed contents are changed according to the Call Type.

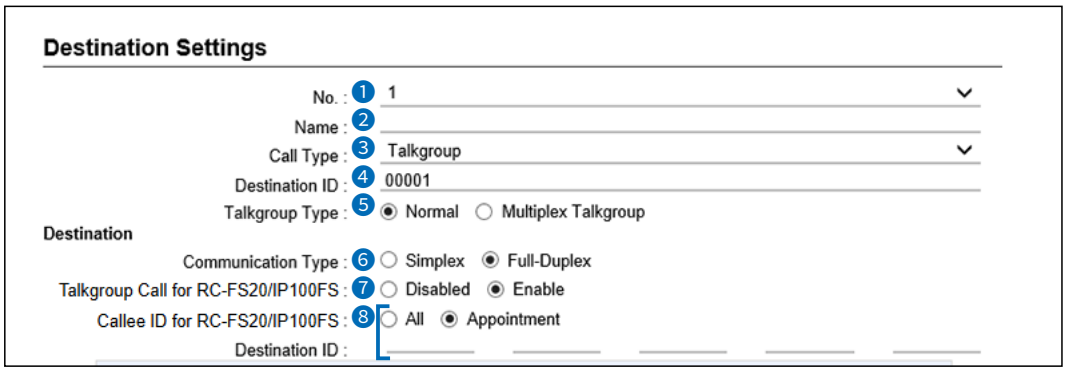

This is an example of setting "Talkgroup" as the Call Type (❸), and "Appointment" as the Callee ID for RC-FS20/IP100FS (❽).

❶ No. ..... Select the number to register the destination Talkgroup.
Up to 1990 destinations can be registered.

❷ Name ..... Enter a destination name of up to 31 characters.

❸ Call Type ..... Select "Talkgroup" for Talkgroup calls.

❹ Destination ID ..... Enter a destination number.
Range: 00001 ~ 60000

ⓘ This number must also be registered in the [ID List] setting (Transceiver Controller > Common Settings > ID List > ID List).

ⓘ When "Function Key (FUNC Key / Menu)" in the [Talkgroup Selection] setting (Transceiver Controller > Common Settings > Profile > Profile > Talkgroup Selection) is selected, the WLAN transceiver can call members in the same Talkgroup.
Select "OFF" on the WLAN transceiver to return to the usual standby mode screen.
(Example: IP100H)



Talkgroup is selected



Talkgroup is OFF



Talkgroup is selected



Talkgroup is OFF

Destination Settings screen

Destination Settings > Destination Settings

■ Destination Settings (Talkgroup)

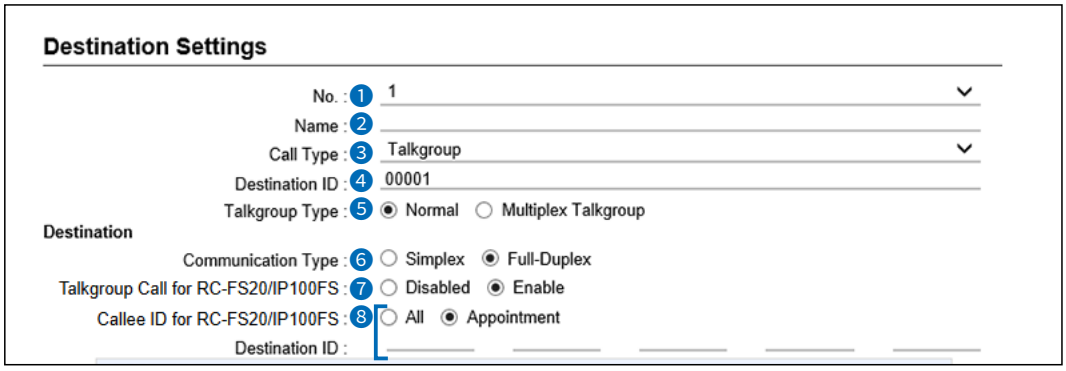

This is an example of setting “Talkgroup” as the Call Type (❸), and “Appointment” as the Callee ID for RC-FS20/IP100FS (❽).

❺ Talkgroup Type ……

When “Multiplex Talkgroup” is selected, you can talk to multiple Talkgroups.



ⓘ This setting can be selected when “Talkgroup” is selected in Call Type (❸).
ⓘ You cannot register the Multiplex Talkgroup in other Multiplex Talkgroups.
ⓘ The normal Talkgroup can only belong to 1 Multiplex Talkgroup.

Example: When Talkgroup1002 (Normal) and Talkgroup1003 (Normal) belong to Talkgroup1001 (Multiplex).
- Talkgroup1001 can call Talkgroup1001, Talkgroup1002, and Talkgroup1003.
- Talkgroup1002 can call Talkgroup1001 and Talkgroup1002.
- Talkgroup1003 can call Talkgroup1001 and Talkgroup1003.

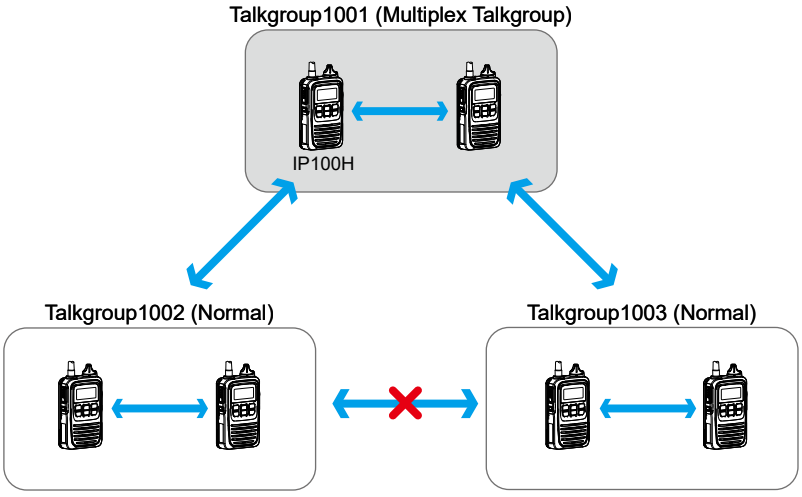

Destination Settings screen

Destination Settings > Destination Settings

■ Destination Settings (Talkgroup)

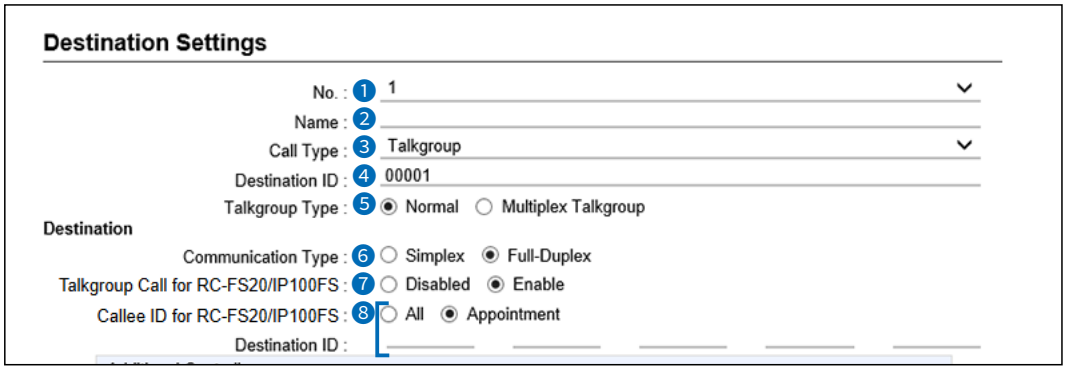

This is an example of setting “Talkgroup” as the Call Type (❸), and “Appointment” as the Callee ID for RC-FS20/IP100FS (❽).

❻ Communication Type …… Select “Simplex” or “Full-Duplex.” (Default: Full-Duplex)

• Simplex operation

ⓘ When “Simplex” is selected, the called station cannot reply until the caller station stops transmitting.

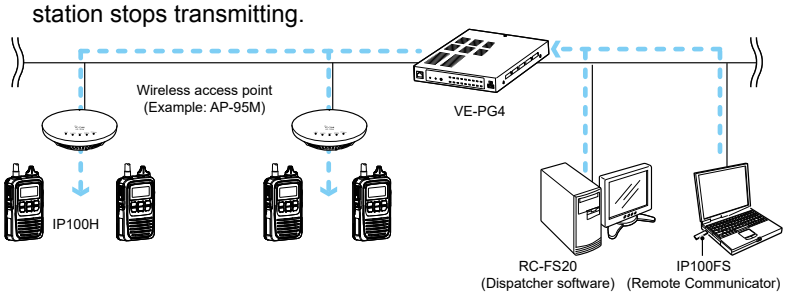

• Full-Duplex operation

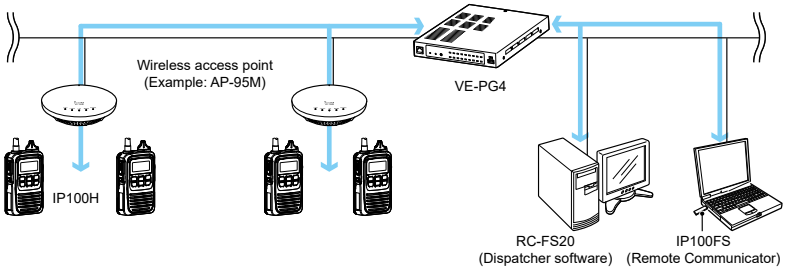

❼ Talkgroup Call for RC-FS20/IP100FS …… Select whether or not the Talkgroup Call includes the RC-FS20 and IP100FS. (Default: Enable)

❽ Callee ID for RC-FS20/IP100FS …… Select the RC-FS20 or IP100FS to be called when “Enable” is selected in [Talkgroup Call for RC-FS20/IP100FS] (❼). (Default: All)

ⓘ When “Appointment” is selected, you can register up to 5 RC-FS20’s or IP100FS’s destination IDs (4 digits).

ⓘ This item is not displayed when “Disabled” is selected in [Talkgroup Call for RC-FS20/IP100FS] (❼).

ⓘ In the Multiplex Talkgroup, the settings for the RC-FS20 or IP100FS must be the same for all the Talkgroups.

Destination Settings screen

Destination Settings > Destination Settings

■ Destination Settings (Talkgroup)

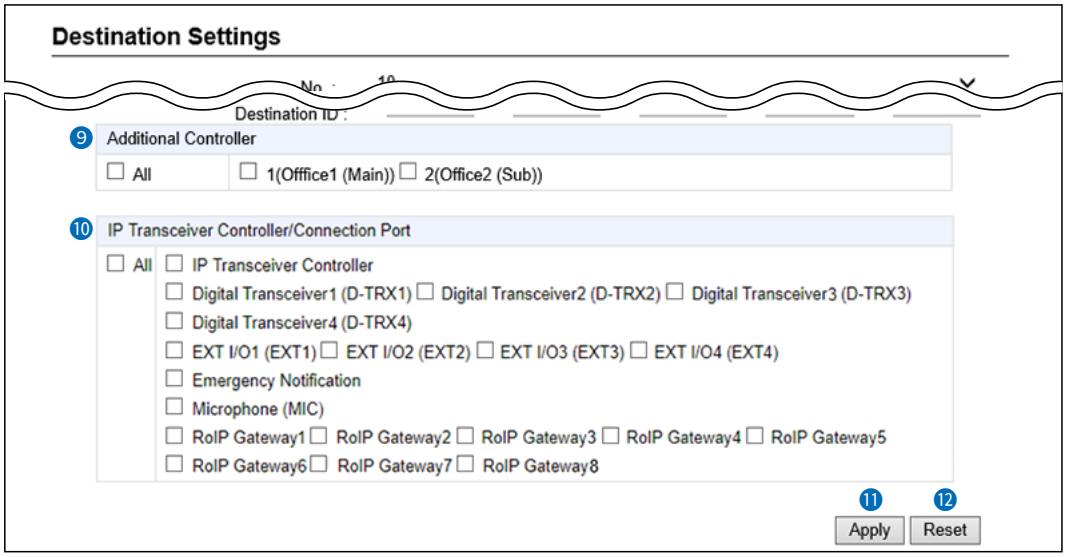

This is an example of setting “Talkgroup” as the Call Type (❸).

❾ Additional Controller …… Select the additional controller when configuring multiple controllers to enable Talkgroup Call between different controllers.

ⓘ By clicking “All,” you can select or cancel all entries in the list.

ⓘ When “Sub” is selected in the [Additional Controller Settings] setting



(Transceiver Controller > RoIP Settings > Additional Controller Settings), specify the master controller as the connection destination, as shown below.

ⓘ The other bases in [Additional Controller] (❾) and [IP Transceiver Controller/Connection Port] (❿) can be connected to a total of up to 22 locations. (“IP Transceiver Controller” is not included this number of connections.) If you connect the other bases to more than 22 locations, you cannot communicate properly.

Destination Settings screen

Destination Settings > Destination Settings

■ Destination Settings (Talkgroup)

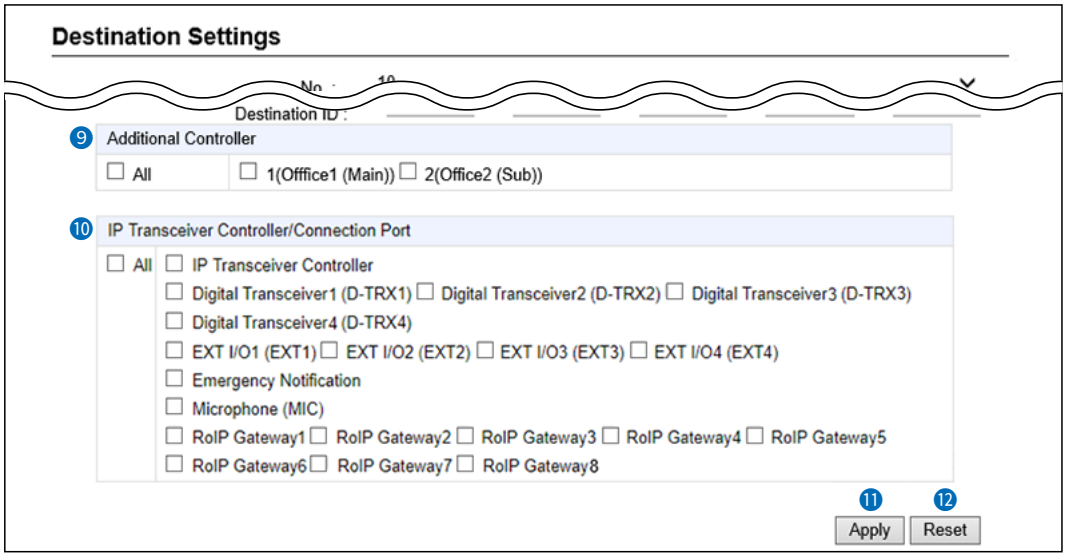

This is an example of setting “Talkgroup” as the Call Type (❸).

❿ IP Transceiver Controller/ Connection Port……

Select the communication devices.

- **IP Transceiver Controller**[*1]
- **Digital Transceiver1 (D-TRX1) ~ Digital Transceiver4 (D-TRX4)**
- **EXT I/O1 (EXT1) ~ EXT I/O4 (EXT4)**[*2]
- **Emergency Notification**
- **Microphone (MIC)**
- **RoIP Gateway1 ~ RoIP Gateway8**

[*1] Displayed when an IP Transceiver Controller is connected.

[*2] When [Connected Unit] is set to “EXT I/O Unit” and [EXT I/O Port Mode] is set to “Separate” in [EXT I/O Port Mode] setting (Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode), “EXT Input” and “EXT Output” are displayed.

ⓘ By clicking “All,” you can select or cancel all at once.

ⓘ When a speaker microphone is connected to the [MIC] port, the audio input/output of the [EXT1] port is disconnected.
The Audio input/output of the [MIC] port and the [EXT1] port cannot be used at the same time.

ⓘ The other bases in [Additional Controller] (❾) and [IP Transceiver Controller/ Connection Port] (❿) can be connected to a total of up to 22 locations.
(“IP Transceiver Controller” is not included this number of connections.)
If you connect the other bases to more than 22 locations, you cannot communicate properly.

Destination Settings screen

Destination Settings > Destination Settings

■ Destination Settings (Talkgroup)

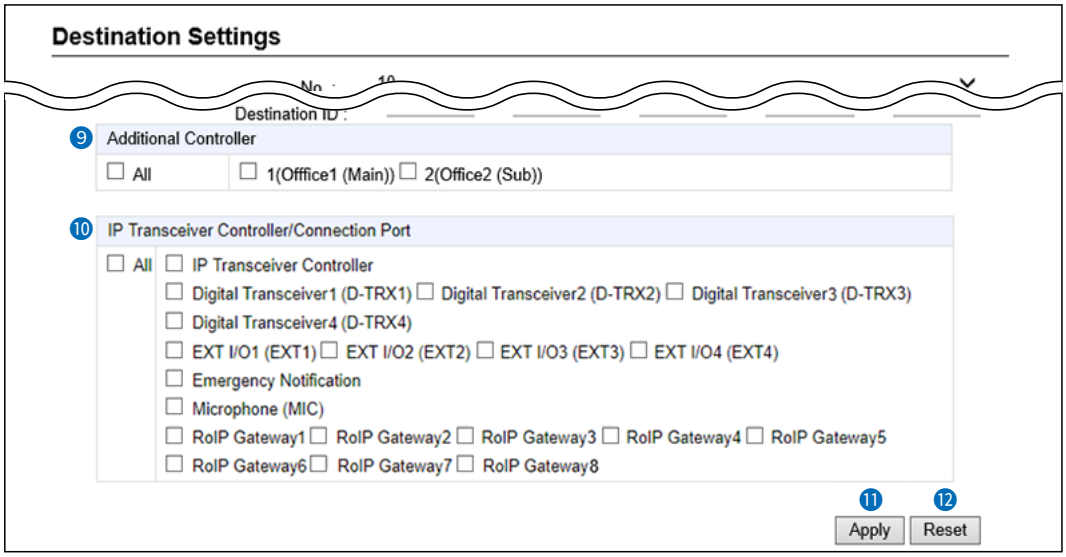

This is an example of setting “Talkgroup” as the Call Type (❸).

⓫ <Apply> ..... Click to apply the entries.

• **When “Normal” is selected in the Talkgroup Type**
The entries are displayed in [List of Destination Setting Entries (Talkgroup Call)].

• **When “Multiplex Talkgroup” is selected in the Talkgroup Type**
The entries are displayed in [List of Destination Setting Entries (Multiplex Talkgroup Call)].

⓬ <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Destination Settings screen

Destination Settings > Destination Settings

■ Destination Settings (Individual)

The settings to call the registered destination station through the IP network or the RoIP Gateway's transceiver port.
ⓘ The displayed contents are changed according to the Call Type.

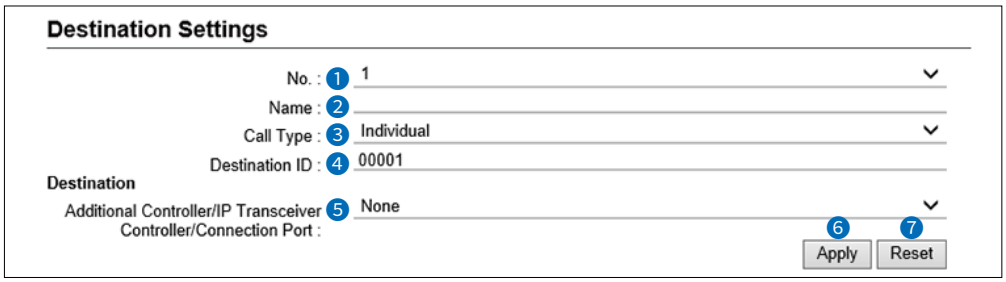

This is an example of setting "Individual" as the Call Type (❸).

❶ No. ..... Select the number to register the destination station.
Up to 1990 destinations can be registered.

❷ Name ..... Enter a destination name of up to 31 characters.

❸ Call Type ..... Select "Individual" for Individual calls.

❹ Destination ID ..... Enter a destination number.
• Range: 00001 ~ 60000

Destination Settings screen

Destination Settings > Destination Settings

■ Destination Settings (Individual)

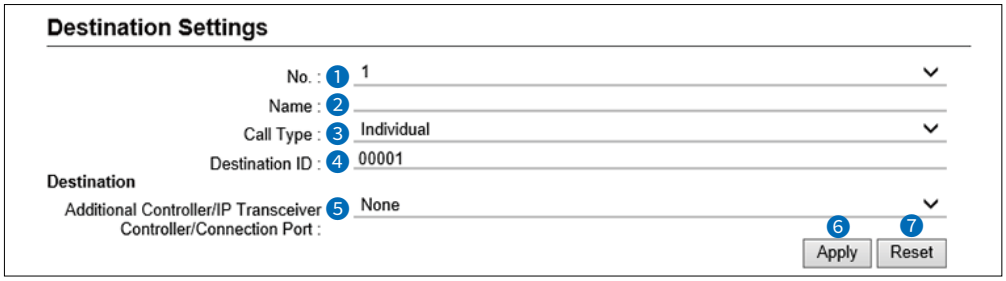

This is an example of setting “Individual” as the Call Type (3).

5 Additional Controller/IP Transceiver Controller/Connection Port … Select the communication devices or the path.

- **None**
- **Additional Controller*1**
- **IP Transceiver Controller*2**
- **Digital Transceiver1 (D-TRX1) ~ Digital Transceiver4 (D-TRX4)**
- **EXT I/O1 (EXT1) ~ EXT I/O4 (EXT4)*3**
- **Emergency Notification**
- **Microphone (MIC)**
- **RoIP Gateway1 ~ RoIP Gateway8**

*1 The registered additional Controllers are displayed.

*2 Displayed when an IP Transceiver Controller is connected.

*3 When [Connected Unit] is set to “EXT I/O Unit” and [EXT I/O Port Mode] is set to “Separate” in the [EXT I/O Port Mode] setting (Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode), “EXT Input” and “EXT Output” are displayed.

ⓘ When a speaker microphone is connected to the [MIC] port, the audio input/output of the [EXT1] port is disconnected.
The Audio input/output of the [MIC] port and the [EXT1] port cannot be used at the same time.

6 <Apply> ..... Click to apply the entries.

ⓘ The registered contents are displayed in [List of Destination Setting Entries (Individual Call)].

7 <Reset> ..... Click to reset the settings.

ⓘ You cannot reset after clicking <Apply>.

Destination Settings screen

Destination Settings > Destination Settings

■ Destination Settings (Telephone)

The settings to call the registered telephone through the IP network.
ⓘ The displayed contents are changed according to the Call Type.

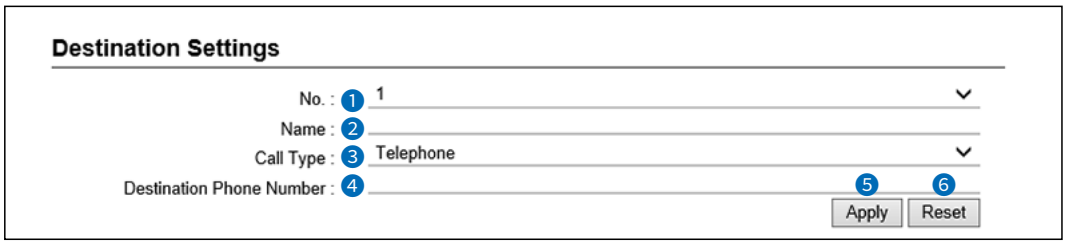

This is an example of setting “Telephone” as the Call Type (❸).

❶ No. ..... Select the number to register the destination station.
Up to 1990 destinations can be registered.

❷ Name ..... Enter a destination name of up to 31 characters.

❸ Call Type ..... Select “Telephone” for Telephone calls.
ⓘ This Call Type includes the transceivers connected by the Bridge Connection through a VE-PG4.

❹ Destination Phone Number Enter a destination phone number of up to 31 digit numbers and characters (# or *).

❺ <Apply> ..... Click to apply the entries.
ⓘ The registered contents are displayed in [List of Destination Setting Entries (Telephone)].

❻ <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Destination Settings screen

Destination Settings > Destination Settings

■ List of Destination Setting Entries (All Call)

Lists the destination setting entries for All Calls.
ⓘ Click <Edit> to edit the entry.

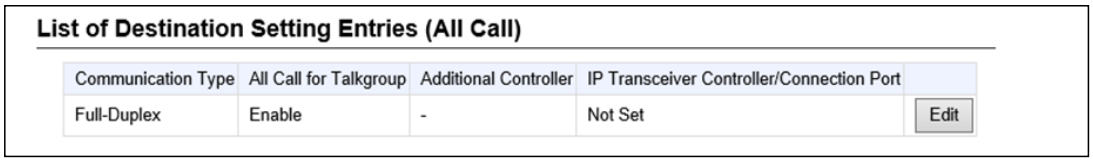
List of Destination Setting Entries (All Call)

Communication Type	All Call for Talkgroup	Additional Controller	IP Transceiver Controller/Connection Port	
Full-Duplex	Enable	-	Not Set	Edit

Destination Settings > Destination Settings

■ List of Destination Setting Entries (Group Call)

Lists the destination setting entries for Group Calls.

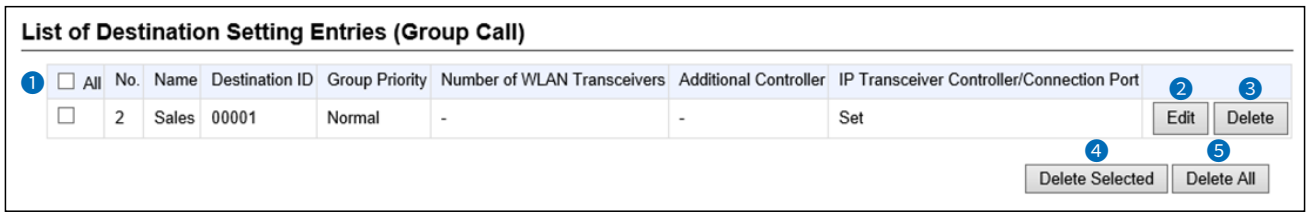
List of Destination Setting Entries (Group Call)

❶ All	No.	Name	Destination ID	Group Priority	Number of WLAN Transceivers	Additional Controller	IP Transceiver Controller/Connection Port	❷ Edit	❸ Delete
☐	2	Sales	00001	Normal	-	-	Set	Edit	Delete

❹ Delete Selected ❺ Delete All

❶ Check Box ..... Click to add a check mark to delete the entry.
ⓘ By clicking <All>, you can select or cancel all the entries.

❷ <Edit> ..... Click to edit the entry.

❸ <Delete> ..... Click to delete the entry.
ⓘ You cannot restore after clicking <Delete>.

❹ <Delete Selected> ..... Click to delete the selected entries.
ⓘ You cannot restore after clicking <Delete Selected>.

❺ <Delete All> ..... Click to delete all of the entries.
ⓘ You cannot restore after clicking <Delete All>.

Destination Settings screen

Destination Settings > Destination Settings

■ List of Destination Setting Entries (Talkgroup Call)

Lists the destination setting entries for Talkgroup Calls.

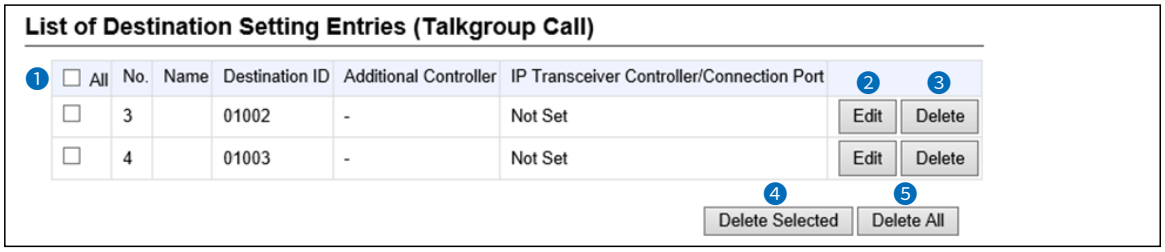

❶Check Box ..... Click to add a check mark to delete the entry.
ⓘ By clicking <All>, you can select or cancel all the entries.

❷<Edit> ..... Click to edit the entry.

❸<Delete> ..... Click to delete the entry.
ⓘ You cannot restore after clicking <Delete>.

❹<Delete Selected> ..... Click to delete the selected entries.
ⓘ You cannot restore after clicking <Delete Selected>.

❺<Delete All> ..... Click to delete all of the entries.
ⓘ You cannot restore after clicking <Delete All>.

Destination Settings screen

Destination Settings > Destination Settings

■ List of Destination Setting Entries (Multiplex Talkgroup Call)

Lists the destination setting entries for Multiplex Talkgroup Calls.

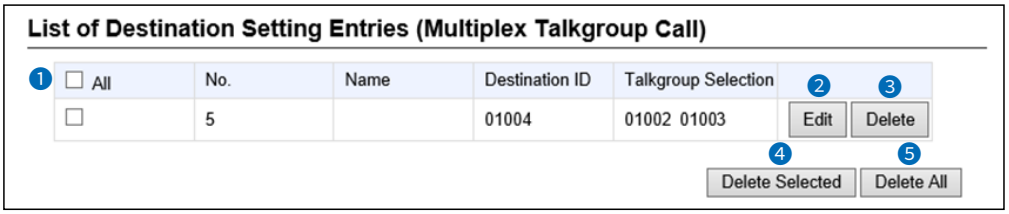

1 Check Box ..... Click to add a check mark to delete the entry.
ⓘ By clicking <All>, you can select or cancel all the entries.

2 <Edit> ..... Click to edit the entry.

3 <Delete> ..... Click to delete the entry.
ⓘ You cannot restore after clicking <Delete>.

4 <Delete Selected> ..... Click to delete the selected entries.
ⓘ You cannot restore after clicking <Delete Selected>.

5 <Delete All> ..... Click to delete all of the entries.
ⓘ You cannot restore after clicking <Delete All>.

Destination Settings screen

Destination Settings > Destination Settings

■ List of Destination Setting Entries (Individual Call)

Lists the destination setting entries for Individual Calls.

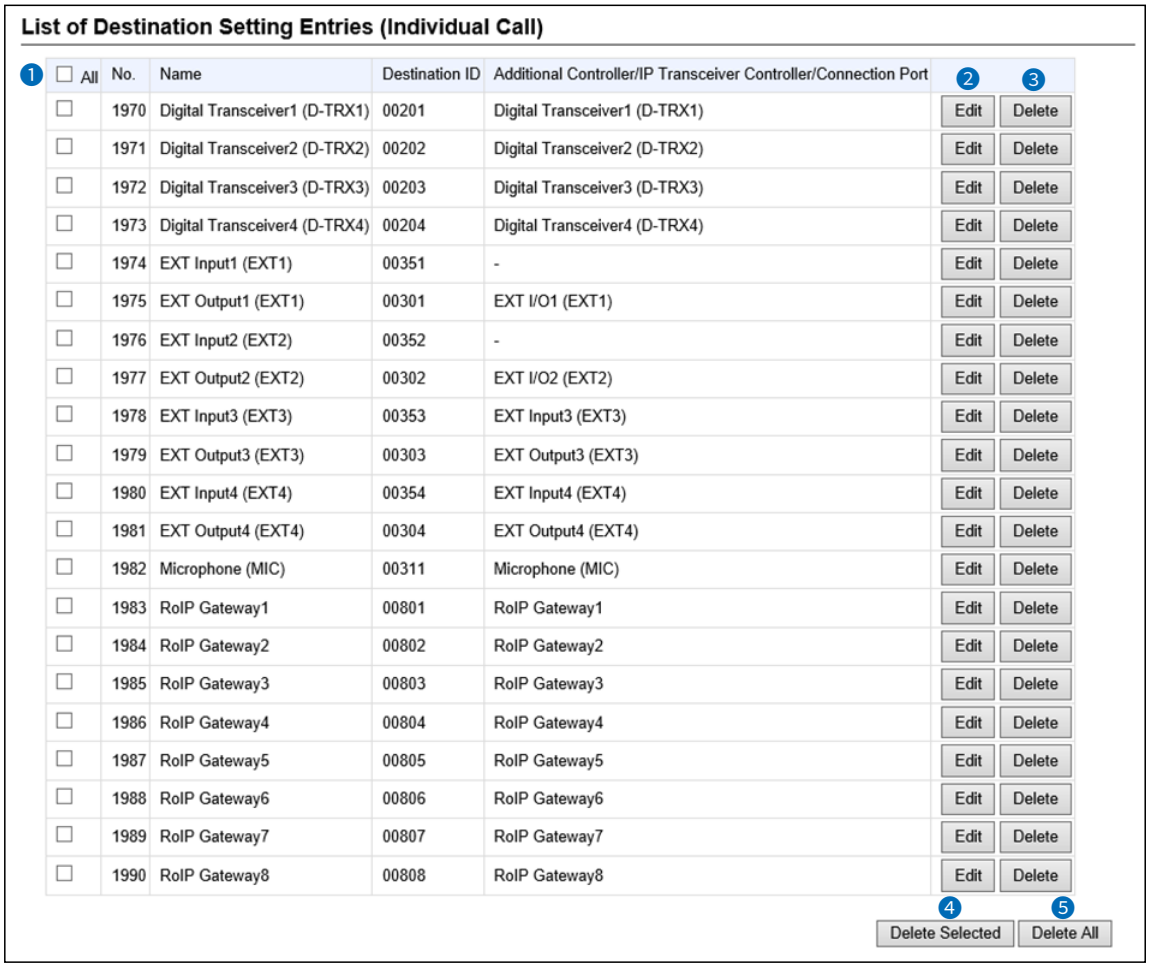

List of Destination Setting Entries (Individual Call)

❶	All	No.	Name	Destination ID	Additional Controller/IP Transceiver Controller/Connection Port	❷	❸
☐		1970	Digital Transceiver1 (D-TRX1)	00201	Digital Transceiver1 (D-TRX1)	Edit	Delete
☐		1971	Digital Transceiver2 (D-TRX2)	00202	Digital Transceiver2 (D-TRX2)	Edit	Delete
☐		1972	Digital Transceiver3 (D-TRX3)	00203	Digital Transceiver3 (D-TRX3)	Edit	Delete
☐		1973	Digital Transceiver4 (D-TRX4)	00204	Digital Transceiver4 (D-TRX4)	Edit	Delete
☐		1974	EXT Input1 (EXT1)	00351	-	Edit	Delete
☐		1975	EXT Output1 (EXT1)	00301	EXT I/O1 (EXT1)	Edit	Delete
☐		1976	EXT Input2 (EXT2)	00352	-	Edit	Delete
☐		1977	EXT Output2 (EXT2)	00302	EXT I/O2 (EXT2)	Edit	Delete
☐		1978	EXT Input3 (EXT3)	00353	EXT Input3 (EXT3)	Edit	Delete
☐		1979	EXT Output3 (EXT3)	00303	EXT Output3 (EXT3)	Edit	Delete
☐		1980	EXT Input4 (EXT4)	00354	EXT Input4 (EXT4)	Edit	Delete
☐		1981	EXT Output4 (EXT4)	00304	EXT Output4 (EXT4)	Edit	Delete
☐		1982	Microphone (MIC)	00311	Microphone (MIC)	Edit	Delete
☐		1983	RoIP Gateway1	00801	RoIP Gateway1	Edit	Delete
☐		1984	RoIP Gateway2	00802	RoIP Gateway2	Edit	Delete
☐		1985	RoIP Gateway3	00803	RoIP Gateway3	Edit	Delete
☐		1986	RoIP Gateway4	00804	RoIP Gateway4	Edit	Delete
☐		1987	RoIP Gateway5	00805	RoIP Gateway5	Edit	Delete
☐		1988	RoIP Gateway6	00806	RoIP Gateway6	Edit	Delete
☐		1989	RoIP Gateway7	00807	RoIP Gateway7	Edit	Delete
☐		1990	RoIP Gateway8	00808	RoIP Gateway8	Edit	Delete

❹ Delete Selected ❺ Delete All

ⓘ The screen above shows the default settings.

❶ Check Box ..... Click to add a check mark to delete the entry.
ⓘ By clicking <All>, you can select or cancel all the entries.

❷ <Edit> ..... Click to edit the entry.

❸ <Delete> ..... Click to delete the entry.
ⓘ You cannot restore after clicking <Delete>.

❹ <Delete Selected> ..... Click to delete the selected entries.
ⓘ You cannot restore after clicking <Delete Selected>.

❺ <Delete All> ..... Click to delete all of the entries.
ⓘ You cannot restore after clicking <Delete All>.

Destination Settings screen

Destination Settings > Destination Settings

■ List of Destination Setting Entries (Telephone)

Lists the destination setting entries for Telephone Calls.

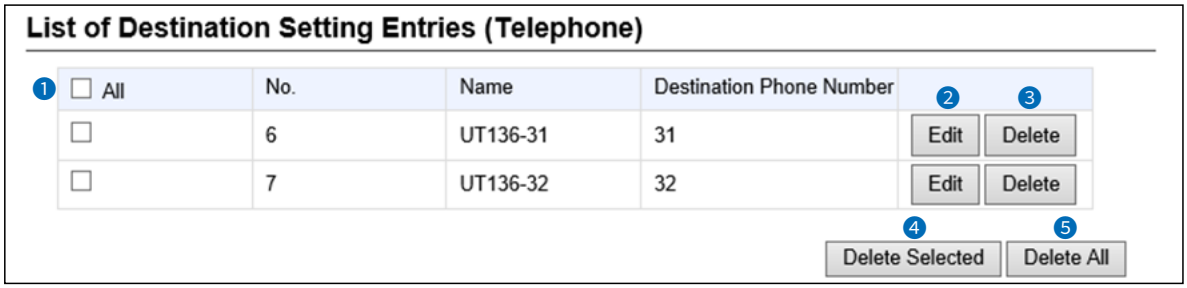

❶Check Box ..... Click to add a check mark to delete the entry.
ⓘ By clicking <All>, you can select or cancel all the entries.

❷<Edit> ..... Click to edit the entry.

❸<Delete> ..... Click to delete the entry.
ⓘ You cannot restore after clicking <Delete>.

❹<Delete Selected> ..... Click to delete the selected entries.
ⓘ You cannot restore after clicking <Delete Selected>.

❺<Delete All> ..... Click to delete all of the entries.
ⓘ You cannot restore after clicking <Delete All>.

Destination Settings screen

Destination Settings > Destination Settings

■ Destination Batch Setting

In these settings, you can register the Destination IDs all at once by serial number, or copy the registered settings to other destinations.

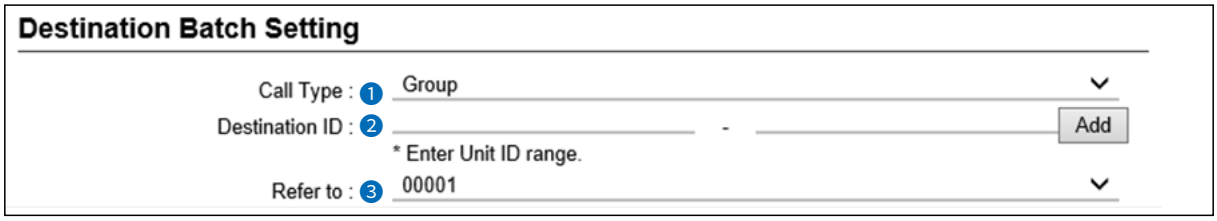

❶Call Type ..... Select the Call Type from “Individual,” “Group,” or “Talkgroup.”

❷Destination ID ..... Enter the range of Destination ID number.
• **<Add>**
By clicking <Add> after [Refer to] (❸) is set, the entered Destination ID range is registered to the selected reference.
ⓘ When the entered Destination ID number is already registered. “Override the settings” is displayed.

❸Refer to ..... Select the registered setting for reference.

EXPERT SETTINGS

Section 9

Emergency Notification screen 9-2
■ Emergency Notification 9-2
Abnormal Condition Monitoring screen 9-3
■ LAN Port Link-down 9-3
■ PING Test 9-4
■ SIP Server Registration 9-5
IP Transceiver Status Filtering screen 9-6
■ IP Transceiver Status Filtering 9-6
■ Filtering List 9-7
■ Filtering List Batch Setting 9-8
Connection Port Extension screen 9-9
■ VoIP Settings 9-9
Call Recording screen 9-12
■ Common Setting 9-12
■ Recorder Setting 9-13
■ List of Recording Box Entries 9-15
Operating Mode Setting screen 9-16
■ Operating Mode Setting 9-16

Emergency Notification screen

Expert Settings > Emergency Notification

■ Emergency Notification

Select the port to use as the emergency notice output.

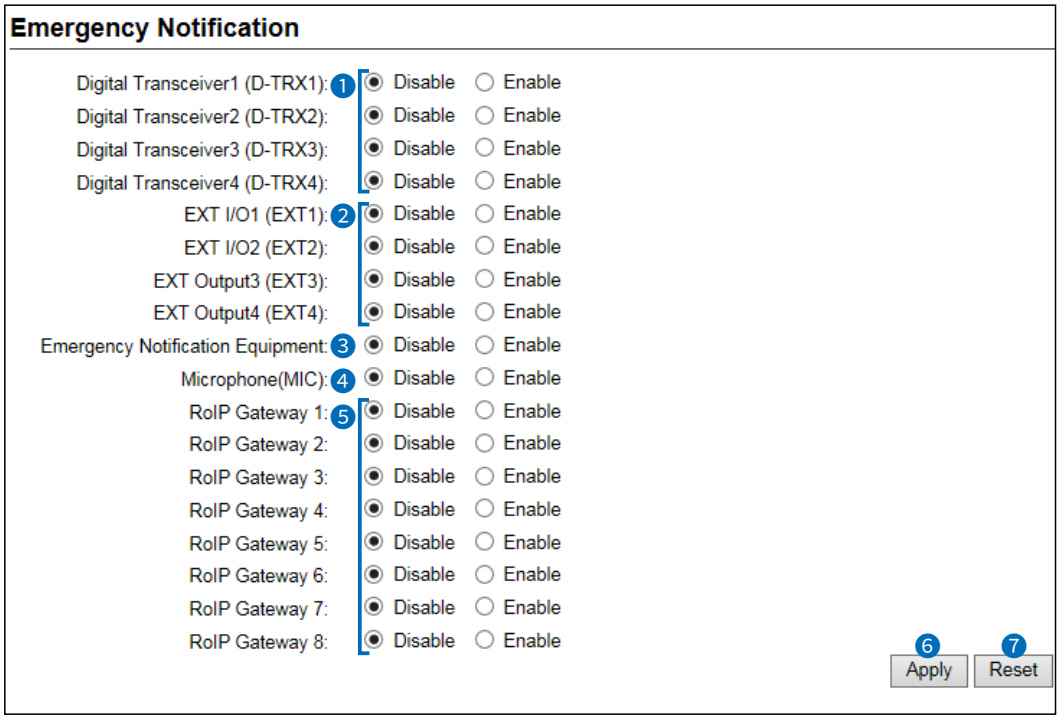

❶ Digital Transceiver ..... Select whether or not to send an emergency notice to the D-TRX1 ~ D-TRX4 ports. (Default: Disable)

❷ EXT I/O / EXT Output ..... Select whether or not to send an emergency notice to transceivers or devices connected to the EXT I/O ports. (Default: Disable)

ⓘ "EXT Output" is displayed when the "Connected Unit" is set to "EXT I/O Unit," and "EXT I/O Port Mode" is set to "Separate."
(Connection Port Settings > EXT I/O (EXT) > Connected Unit)
(Connection Port Settings > EXT I/O (EXT) > EXT I/O Port Mode)

ⓘ Either of the [EXT1] port or the [MIC] port is usable at the same time. When a microphone is connected to the [MIC] port, the [EXT1] port is disabled.

❸ Emergency Notification Equipment ..... Select whether or not to send an emergency notice to the specified bridge-connected destination. (Default: Disable)

❹ Microphone (MIC) ..... Select whether or not to send an emergency notice to the microphone connected to the RoIP gateway. (Default: Disable)

❺ RoIP Gateway ..... Select whether or not to send an emergency notice to the bridge-connected other RoIP gateways. (Default: Disable)

❻ <Apply> ..... Click to apply the settings.

❼ <Reset> ..... Click to reset the settings.

ⓘ You cannot reset after clicking <Apply>.

Abnormal Condition Monitoring screen

Expert Settings > Abnormal Condition Monitoring

■ LAN Port Link-down

Set the monitor function for a communication error.

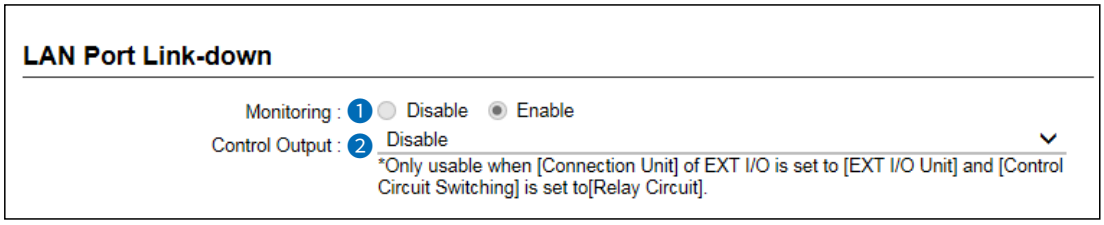

ⓘ The screen shows when Monitoring (❶) is set to “Enable.”

❶Monitoring .....

Select whether or not to detect a RoIP gateway’s LAN port connection error. When an error is detected, it is displayed on the “SYSLOG” screen, as shown below.
(Information > SYSLOG >SYSLOG)

(Default: Disable)

09-11 16:29:32	NOTICE	telephoned: LAN PORT LINK SUCCESS!!
09-11 16:29:12	NOTICE	telephoned: LAN PORT LINK ERROR!!

❷Control Output .....

Displayed only when Monitoring (❶) is set to “Enable.”
Select whether or not to short the B1/B2 terminal (+/–) to output an error detect signal. (Default: Disable)
Select a port if you want to enable the output control.



ⓘ When enabling the output, confirm Switch Control of the port, that you want to output the error detect signal to, is set to “Relay Circuit.”
(Connection Port Settings > EXT I/O (EXT) > EXT Output Settings > Switching Control)

Abnormal Condition Monitoring screen

Expert Settings > Abnormal Condition Monitoring

■ PING Test

Set the monitor function for a communication error.

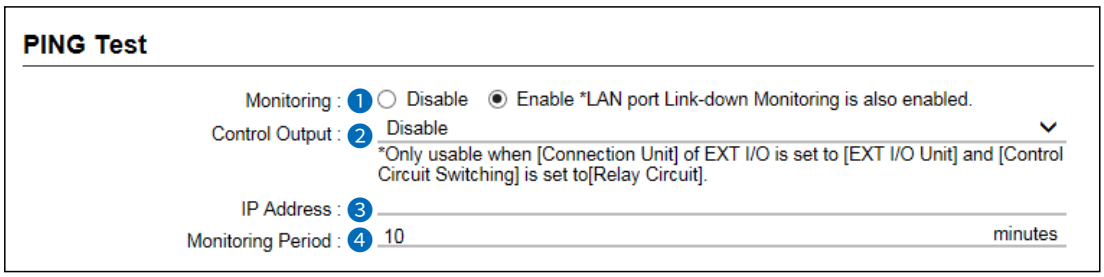

ⓘ ❷ ~ ❹ are displayed only when Monitoring (❶) is set to “Enable.”

❶ Monitoring ..... Select whether or not to send PING commands to the host specified by the IP address. When the error is detected, the error is displayed on the “SYSLOG” screen. (Information > SYSLOG >SYSLOG)
(Default: Disable)

❷ Control Output ..... Select whether or not to short the B1/B2 terminal (+/–) to output an error detect signal. (Default: Disable)
ⓘ Confirm the Relay Circuit is selected.
(Connection Port Settings > EXT I/O (EXT) > EXT Output Settings > Switching Control)

❸ IP Address ..... Enter the destination IP address to send the PING commands to.

❹ Monitoring Period ..... Set the monitor period. (Default: 10)
• Range: 1 ~ 4320 (minutes)

Abnormal Condition Monitoring screen

Expert Settings > Abnormal Condition Monitoring

■ SIP Server Registration

Set the monitor function for the communication error.

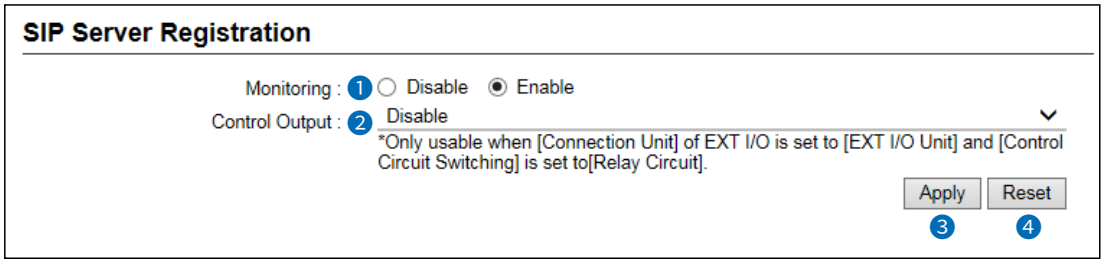

❶Monitoring ..... Select whether or not to detect the SIP server connection errors. When an error is detected, it is displayed on the “SYSLOG” screen. (Information > SYSLOG >SYSLOG) (Default: Disable)
ⓘ The [VoIP] indicator works regardless of this setting.

❷Control Output ..... Displayed only when Monitoring (❶) is set to “Enable.” Select whether or not to short the B1/B2 terminal (+/–) to output an error detect signal. (Default: Disable)
ⓘ Confirm the Relay Circuit is selected.
(Connection Port Settings > EXT I/O (EXT) > EXT Output Settings > Switching Control)

❸<Apply> ..... Click to apply the settings.

❹<Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

IP Transceiver Status Filtering screen

Expert Settings > IP Transceiver Status Filtering

■ IP Transceiver Status Filtering

Filter settings for transceiver information output to position information software.
ⓘ These settings are for future use.

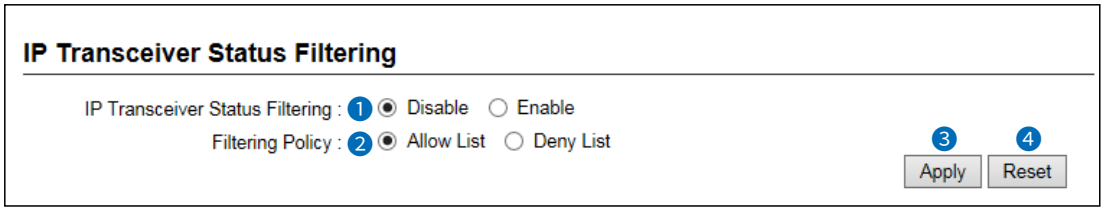

❶IP Transceiver Status Filtering Select whether or not to use the Filtering function. (Default: Disable)

❷Filtering Policy ..... Select whether allow or deny outputting the transceiver information listed on the Filtering List. (Default: Allow List)
- **Allow List**: Output the listed transceiver information.
- **Deny List**: Filter the listed transceiver information.

❸<Apply> ..... Click to apply the settings.

❹<Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

IP Transceiver Status Filtering screen

Expert Settings > IP Transceiver Status Filtering

■ Filtering List

Add up to 200 Unit IDs for the IP transceivers to be filtered.

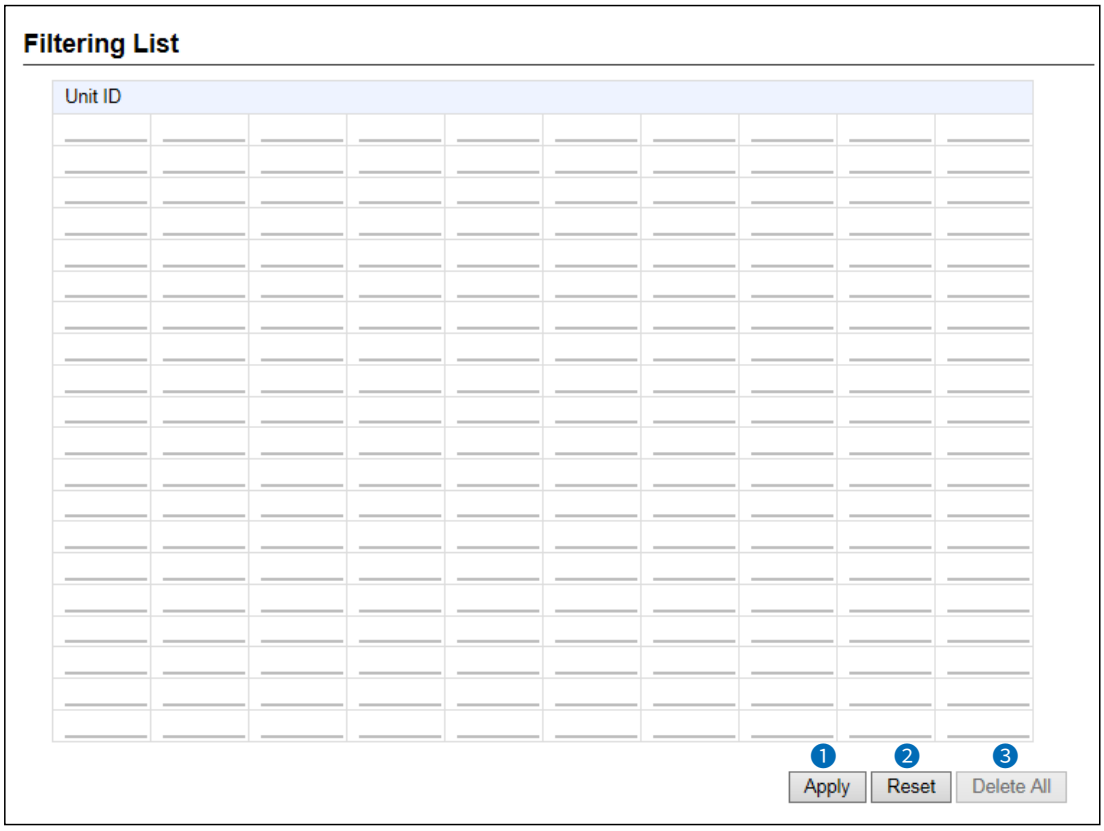

❶<Apply> ..... Click to apply the settings.

❷<Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

❸<Delete All> ..... Click to delete all of the entered contents.
ⓘ You cannot restore after clicking <Delete All>.

IP Transceiver Status Filtering screen

Expert Settings > IP Transceiver Status Filtering

■ Filtering List Batch Setting

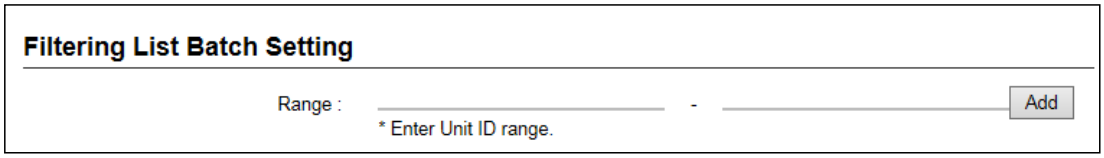

Range ..... Enter the range of the unit IDs that you want to add to the Filtering List, and then click <Add> to add transceivers that have an ID within the range. (Example: 00004 ~ 00010)

Connection Port Extension screen

Expert Settings > Connection Port Extension

■ VoIP Settings

Sets the audio quality for RoIP gateway or Bridge. The setting items vary, depending on the TOS Type.

TOS Type: Not Used

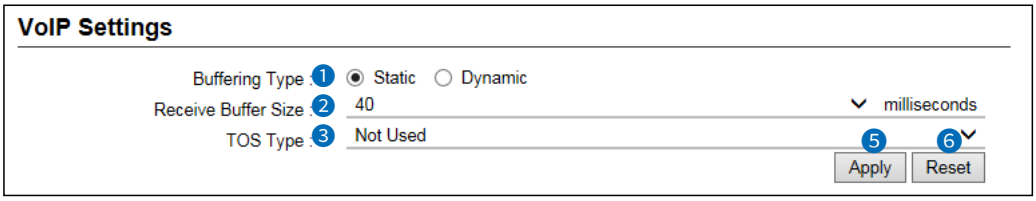

TOS Type: TOS

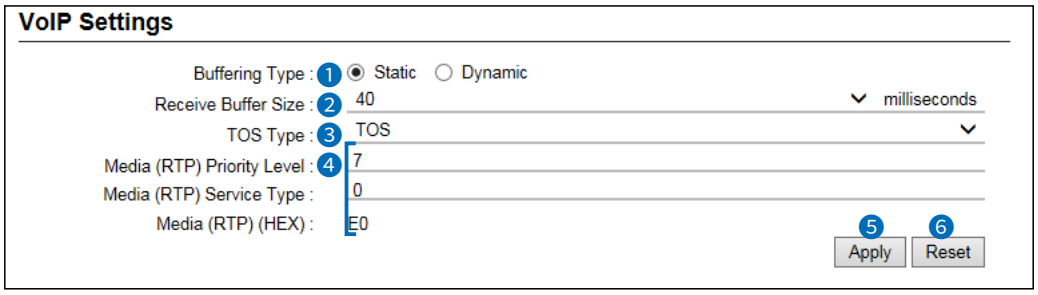

TOS Type: Diffserv

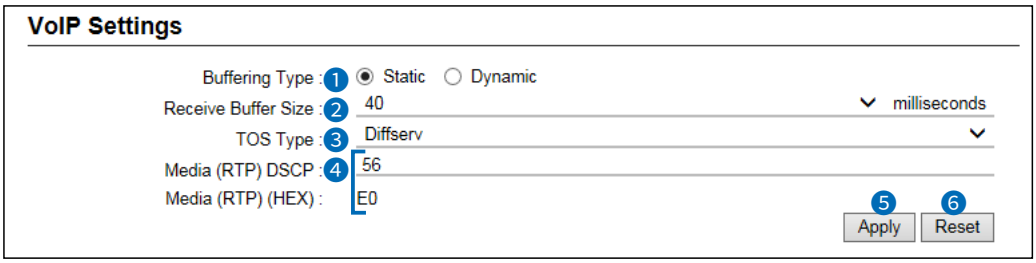

ⓘ The screens above show when the Buffering Type (❶) is set to “Static.”

❶ Buffering Type ..... Select the jitter buffer used to reduce speech break up due to packet fluctuations. (Default: Dynamic)

- **Static**: Buffers receive voice data for a set period of time in the Receive Buffer Size (❷).
- **Dynamic**: Buffering time of the received voice data varies, according to the packet fluctuation status.

❷ Receive Buffer Size ..... Displayed only when Buffering Type (❶) is set to “Static.”
Set the period of time to buffer the received voice data. (Default: 40)

- Range: 20 ~ 1000 (milliseconds)

ⓘ The shorter the time you set, the less the delay, however the more the sound will be interrupted.

Connection Port Extension screen

Expert Settings > Connection Port Extension

■ VoIP Settings

TOS Type: Not Used

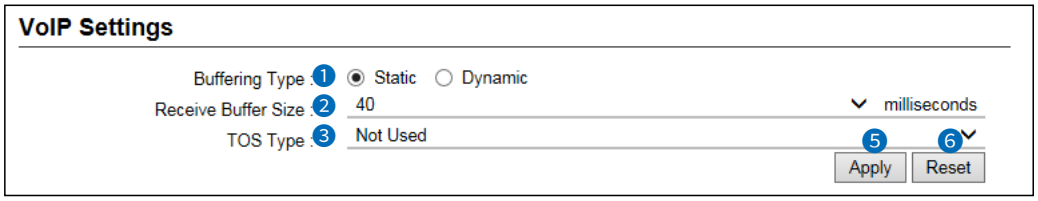

TOS Type: TOS

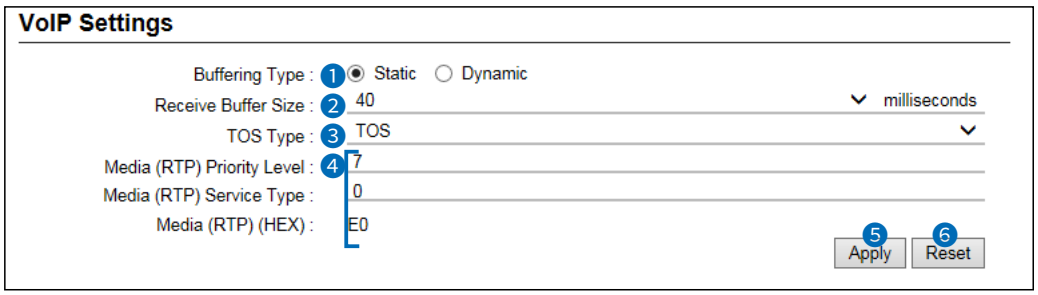

TOS Type: Diffserv

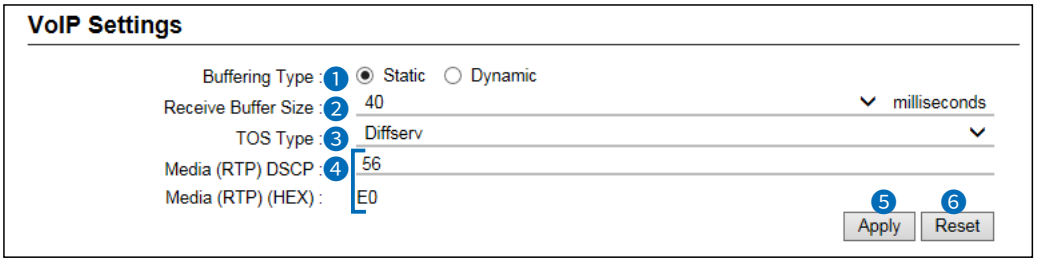

ⓘ The screens above show when the Buffering Type (❶) is set to “Static.”

❸ TOS Type ..... Set TOS Type. (Default: Not Used)

- **Not Used**: Does not use the TOS function.

- **TOS**: Outputs the VoIP packet to the TOS field (8 bit) in the IP header, in the TOS (Type Of Service) format.

ⓘ TOS format applies RFC1349.
- The first 3 bits: Shows the priority.
  Set into “Media (RTP) Priority Level” (❹) with a decimal number.
- The next 4 bits: Shows the service type.
  Set into “Media (RTP) Service Type” (❹) with a decimal number.
  The larger number, the higher priority.
- The last 1 bit: Reserved and fixed to “0.”

- **Diffserv**: Outputs the VoIP packet to the TOS field (8 bit) in the IP header, in the Diffserv (Differentiated Service) format.

ⓘ The Diffserv format details:
- The former 6 bits: Shows the DSCP.
  Set “Media (RTP) DSCP” (❹) with a decimal number.
  The larger number, the higher priority.
- The next 2 bits: Reserved and fixed to “0.”

Connection Port Extension screen

Expert Settings > Connection Port Extension

■ VoIP Settings

TOS Type: Not Used

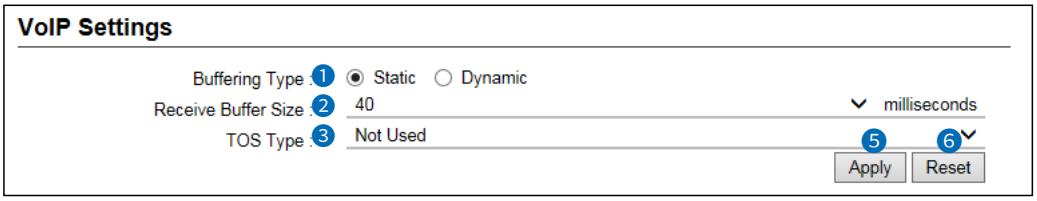

TOS Type: TOS

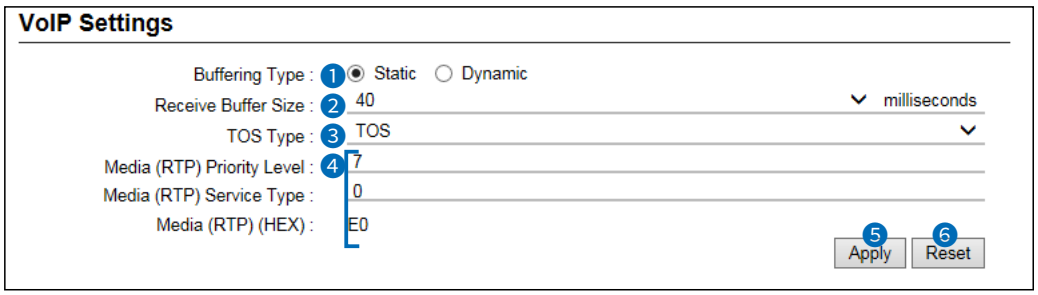

TOS Type: Diffserv

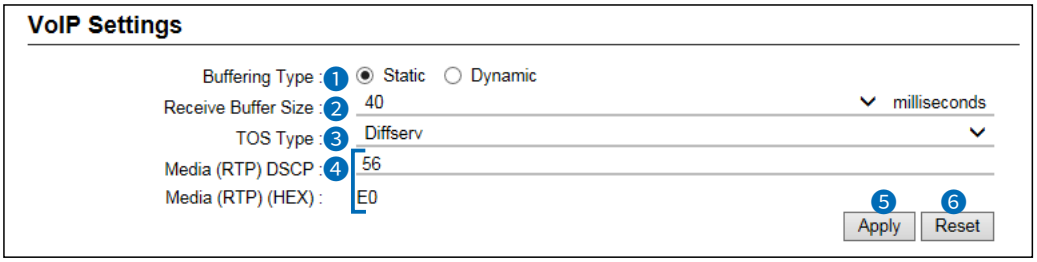

ⓘ The screens above show when the Buffering Type (❶) is set to “Static.”

❹ **Media (RTP)**..... Setting the Priority details for the TOS or Diffserv format options.

- **Priority Level**: Set the value of the priority level for TOS. (Default: 7)
  Range: 0 ~ 7 (in decimal)
- **Service Type**: Set the value of the service type for TOS. (Default: 0)
  Range: 0 ~15 (in decimal)
- **DSCP**: Set the value of DSCP (Differentiated Services Code Point) for Diffserv. (Default: 56)
  Range: 0 ~ 63 (in decimal)

❺ **<Apply>** ..... Click to apply the setting.

❻ **<Reset>** ..... Click to reset the setting.
ⓘ You cannot reset after clicking <Apply>.

Call Recording screen

Expert Settings > Call Recording

■ Common Setting

Set for recording the audio communication between the transceivers.
The audio is saved in a file in each transmitting or receiving.

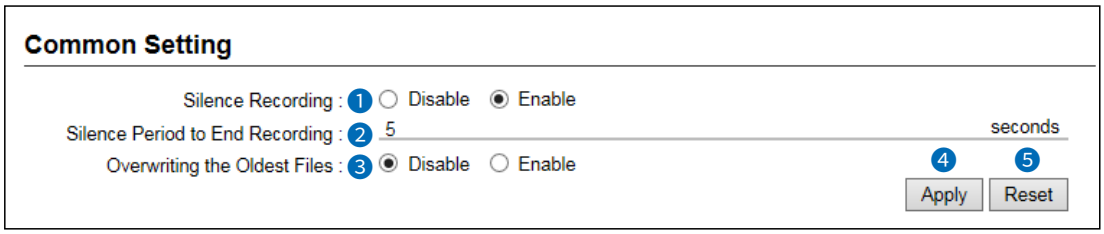

❶Silence Recording ..... Select whether or not to record a communication during there is no communication.
When enabling this option, the RoIP gateway continues recording for the set period of time in “Silence Period to End Recording,” after the communication has been terminated.
The second communication that begins while recording will be continuously recorded within the same file. (Default: Enable)

❷Silence Period to End Recording Set the period of time to stop recording when there is no communication. (Default: 5)
• Range: 1 ~30 seconds

❸Overwriting the Oldest Files Select whether or not to record and overwrite the older data, when the disk is full. (Default: Disable)

❹<Apply> ..... Click to apply the settings.

❺<Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Call Recording screen

Expert Settings > Call Recording

■ Recorder Setting

Records communication audio of the linked transceivers.

Target: Disable

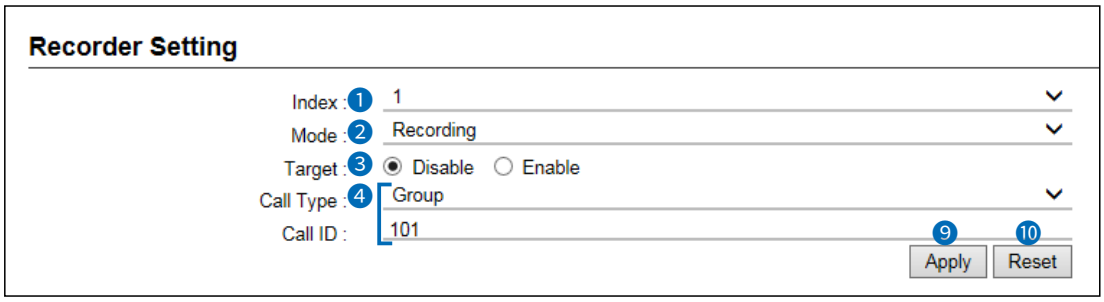

ⓘ The screens above show when the Call Type (❹) is set to “Group.”

Target: Enable



❶ Index ..... Select an index. You can enter up to 4 recording boxes. (Default: 1)

❷ Mode ..... Select the recording/monitor mode. (Default: Disable)

- **Disable**: Does not record or monitors communication audio.
- **Recording**: Records the communication audio to an external storage device.
- **Monitor**: Outputs the specified communication audio to a particular port.
- **Monitor + Recording**: Simultaneously records and monitors.

❸ Target ..... Select whether or not to set WLAN transceivers as recording targets. When enabling this option, select a target WLAN transceiver in Unit ID. (Default: Disable)

ⓘ When the target transceiver is deleted on the Transceiver Registration screen, the recording settings are disabled.
(Transceiver Controller > Transceiver Settings > Transceiver Registration)

❹ Call Type ..... Select the type of call to record or monitor. (Default: All)

- **Individual**: Individual Calls from or to the specified Call ID.
- **Group**: Group Calls to the specified Group.
- **All**: The All Calls.

ⓘ When you select “Individual” or “Group,” also set the Call ID from the list.

Call Recording screen

Expert Settings > Call Recording

■ Recorder Setting

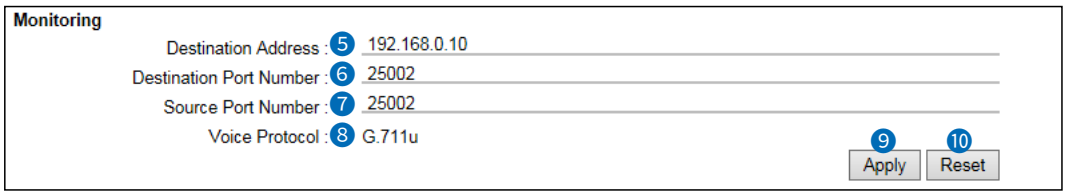

ⓘ Displayed when Mode (❷) is set to “Monitor” or “Monitor + Recording.”

❺ Destination Address ..... Enter the IP address of the destination to be monitored.

❻ Destination Port Number Enter the port number of the destination to be monitored.
(Default: 1: 25000
2: 25002
3: 25004
4: 25006)

❼ Source Port Number ..... Enter the number of the source port that is connected to the destination to be monitored.
(Default: 1: 25000
2: 25002
3: 25004
4: 25006)

❽ Voice Protocol ..... Displays the voice protocol. (Fixed to “G.711u”)

❾ <Apply> ..... Click to apply the settings.

❿ <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Call Recording screen

Expert Settings > Call Recording

■ List of Recording Box Entries

Displays the recording box entries.

List of Recording Box Entries

Index	Mode	Unit ID	Call Type	Call ID	Destination Address	Destination Port Number	Source Port Number	Voice Protocol
1	Recording	00101 (Sales1)	-	-	-	-	-	-
2	Monitor + Recording	00103 (Sales3)	-	-	192.168.0.10	25002	25002	G.711u
3	Disable	-	-	-	-	-	-	-
4	Disable	-	-	-	-	-	-	-

The example in above shows:
1: Recording the communication of the Unit ID 00101.
2: Transmitting the communication audio of the Unit ID 00103 toward the port 25002 of 192.168.0.10 while recording it.

Operating Mode Setting screen

Expert Settings > Operating Mode Settings > Operating Mode Setting

■ Operating Mode Setting

Set the operating mode.

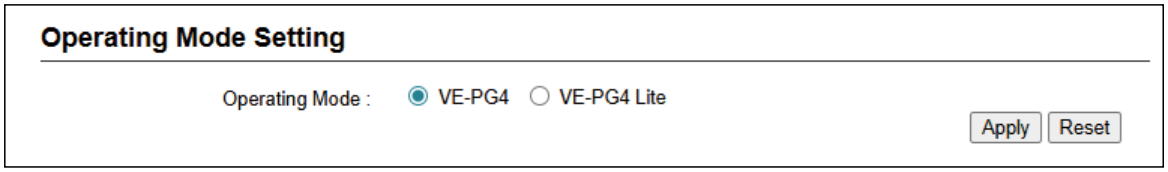

❶ **Operating Mode** ..... Set the operating mode of the RoIP Gateway. (Default: VE-PG4)
Do not change the setting unless you use the RoIP Gateway under the IP4000C system.

❷ **<Apply>** ..... Click to apply the settings.

❸ **<Reset>** ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

IP LINE SETTINGS

Section 10

IP Line screen 10-2
- ■ SIP Server 10-2
- ■ List of SIP Server Entries 10-3
- ■ SIP Server Batch Setting 10-4

Peer to Peer screen 10-5
- ■ Peer to Peer Common Setting 10-5
- ■ Peer to Peer 10-6
- ■ List of Peer to Peer Entries 10-7

VoIP Phonebook screen 10-8
- ■ Save or Write the VoIP Phonebook 10-8
- ■ VoIP Phonebook Entry 10-10
- ■ List of VoIP Phonebook Entries 10-11

IP Line screen

IP Line Settings > IP Line

■ SIP Server

Setting used for connecting the RoIP gateway to the Session Initiation Protocol (SIP) server.

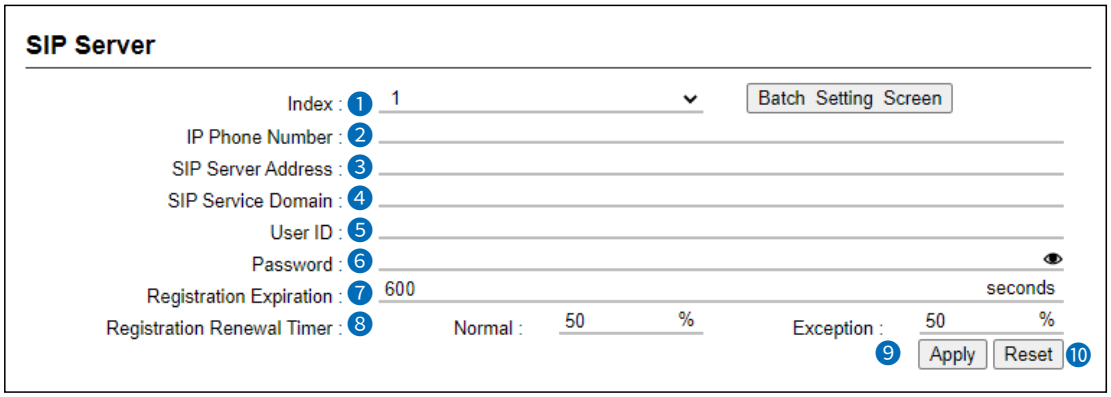

❶ Index ..... Assign the index number for each setting entry.
- Range: 1 ~ 100

ⓘ Click <Batch Setting Screen> if you want to enter 2 or more SIP servers at once. Refer to the SIP Server Batch Setting. (p.10-4)

❷ IP Phone Number ..... Enter an IP phone number to use as a client of SIP server of up to 31 characters (0~9, #, *).

ⓘ The number must be registered on the SIP server.

ⓘ Only when Use Letters for Phone Number is set to “Allow,” you can enter capital and small letters as a phone number.
(PBX Advanced > Advanced Settings > SIP Settings > Use Letters for Phone Number)

❸ SIP Server Address ..... Enter a server address or host name of up to 63 characters.

❹ SIP Service Domain ..... Enter a service domain name of up to 63 characters.

❺ User ID ..... Enter an authentication user ID of up to 63 characters. Use the IP phone number that is entered in (❷).

❻ Password ..... Enter an authentication password of up to 31 characters.

ⓘ The entered password is masked like as “******”.
You can check the entered characters by clicking the eye icon to the right.

❼ Registration Expiration ... Set the registration expiration time.
The connection information stored in the SIP server is discarded after the set time has passed. (Default: 600)
- Range: 60 ~ 28800 seconds.

❽ Registration Renewal Timer Set the registration renewal interval time to between 10 and 90%.
(Default: Normal: 50, Exception: 50)
The interval is expressed by the ratio of the value set in Registration Expiration (❼) to the period of the normal and exception conditions.

❾ <Apply> ..... Click to apply the settings.

❿ <Reset> ..... Click to reset the settings.

ⓘ You cannot reset after clicking <Apply>.

IP Line screen

IP Line Settings > IP Line screen

■ List of SIP Server Entries

You can edit the SIP server settings on the list.

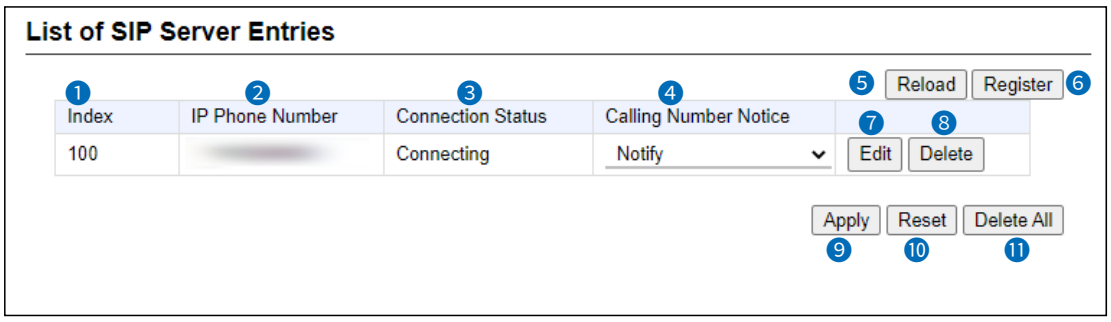

❶ Index ..... Displays the index number.

❷ IP Phone Number ..... Displays the IP phone number.

❸ Connection Status..... Displays the SIP server connection status as Connecting, Connection Successful, or Connection failure.

❹ Calling Number Notice..... Select whether or not to notify your IP phone number to the destination. (Default: Notify)

ⓘ Even if this option is set to “Not notified,” the IP phone number may be notified, according to the telephone or line environment.

❺ <Reload> ..... Click to reload the screen.

ⓘ When “Connection successful” is not displayed, check the registered settings.

❻ <Register> ..... Click to connect to the SIP server.

❼ <Edit> ..... Click to edit the entry.

❽ <Delete> ..... Click to delete the entry.

ⓘ You cannot restore after clicking <Delete>.

❾ <Apply> ..... Click to apply the entry.

❿ <Reset> ..... Click to reset the settings.

ⓘ You cannot reset after clicking <Apply>.

⓫ <Delete all> ..... Click to delete all entries.

ⓘ You cannot restore after clicking <Delete All>.

IP Line screen

IP Line Settings > IP Line

■ SIP Server Batch Setting

You can add 2 or more SIP servers at the same time.
This screen is displayed when the “**Batch Setting Screen**” is clicked.

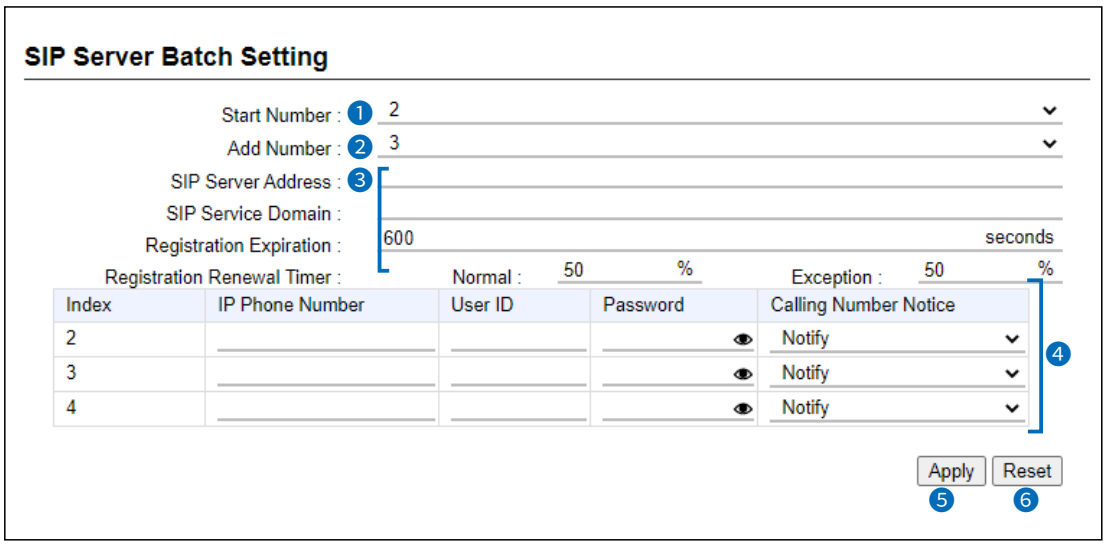

❶Start Number ..... Enter the start number to add more than 2 Phone Number settings at the same time.

❷Add Number ..... Enter the number of SIP servers you want to add to SIP Service Domains (❸).

❸SIP server settings ..... Enter the details on SIP server.
ⓘ Refer to the SIP Server Settings for each setting details.

❹Client settings ..... Enter IP Phone Number, User ID, and Password to each local SIP server (client), and select whether or not to notify the IP Phone Number to the destination.
ⓘ Refer to the SIP Server Settings for each setting details.

❺<Apply> ..... Click to <Apply> the entry.

❻<Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Peer to Peer screen

IP Line Settings > Peer to Peer

■ Peer to Peer Common Setting

You can edit the Peer to Peer call receive setting from the WAN.

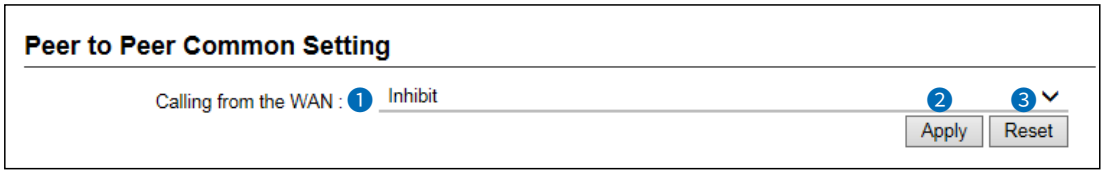

1 Calling from the WAN ..... Select whether or not to permit receiving the Peer to Peer call from the WAN. (Default: Inhibit)

ⓘ When you select “Allow,” Your SIP URI has to be registered to the “SIP URI” item on the “VoIP Phonebook” screen at the caller’s SIP server.
(IP Line Settings > VoIP Phonebook > VoIP Phonebook Entry > SIP URI)

ⓘ The Callee SIP URI must be registered on the VoIP phone book to receive the call through the WAN side.

2 <Apply> ..... Click to apply the settings.

3 <Reset> ..... Click to reset the settings.

ⓘ You cannot reset after clicking <Apply>.

Peer to Peer screen

IP Line Settings > Peer to Peer

■ Peer to Peer

You can edit SIP URI setting used for Peer to Peer call.

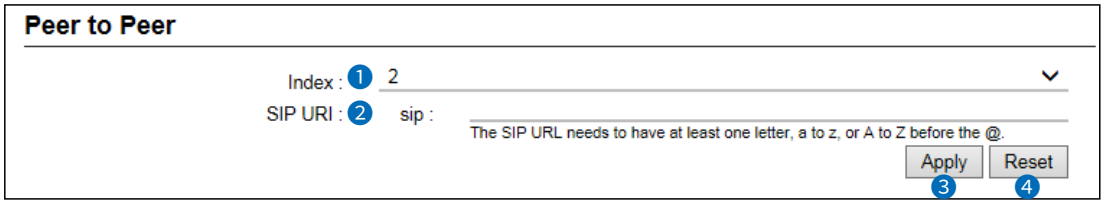

1 Index ..... Select the index number for each entry.
- Range: 1 ~ 500

2 SIP URI ..... Enter the SIP URI up to 63 characters in either format as shown below.
- sip: [SIP username]@[VE-PG4 IP address]
- sip: [SIP username]@[Host name.domain name]

About the [SIP username] part:
Enter an alphabet or number in the [SIP username].
ⓘ Must include at least one alphabet.

About the [Host name.domain name] part:
ⓘ When the VE-PG4 IP address is registered in your party's phonebook, enter the IP address (LAN).
ⓘ When the VE-PG4 host name is registered in the dynamic DNS or static IP address in your party's Phonebook, enter the specified host name (ex. telephone) or domain name (ex. icom.co.jp).

3 <Apply> ..... Click to apply the settings.

4 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Peer to Peer screen

IP Line Settings > Peer to Peer

■ List of Peer to Peer Entries

Displays the entered or edited Peer to Peer settings.



❶ Index ..... Displays the index assigned for the entry.

❷ SIP URI ..... Displays the SIP URI.

❸ <Edit> ..... Click to edit the entry.

❹ <Delete> ..... Click to delete the entry.
ⓘ You cannot restore after clicking <Delete>.

❺ <Delete All> ..... Click to delete all entries.
ⓘ You cannot restore after clicking <Delete All>.

VoIP Phonebook screen

IP Line Settings > VoIP Phonebook

■ Save or Write the VoIP Phonebook

You can save or write the entered VoIP phonebook.

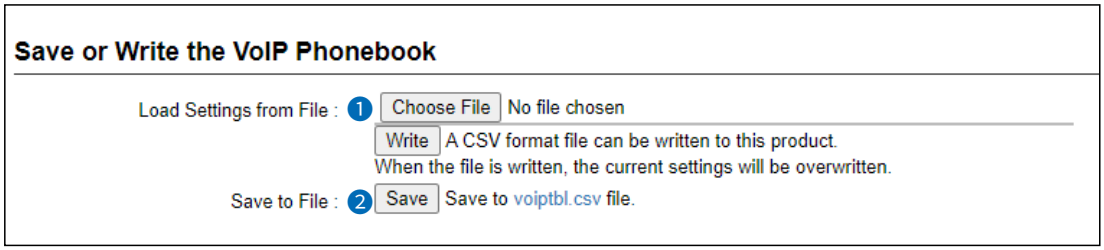

❶Load Settings from File … You can load the saved phonebook file in csv format and write it to the RoIP gateway. Click <Choose File>, and then select the phonebook file (Example: voiptbl.csv) to load. Verify that the selected file is displayed, and then click <Write>.

ⓘ The contents of the file are overwritten to “List of VoIP Phonebook Entries.”

ⓘ When the Setting file (Extension: .sav) is used to restore the setting, the VoIP phonebook will be overwritten.

❷Save to File …… Click to save the “List of VoIP Phonebook” as the [List of VoIP Phonebook Entries] file (voiptbl.csv).

ⓘ You can edit the saved file on a spreadsheet.

ⓘ You can share the saved file with more than 2 RoIP gateways.

VoIP Phonebook screen

IP Line Settings > VoIP Phonebook

■ Save or Write the VoIP Phonebook

❍ **About the rules of a CSV file for the VoIP phonebook**

When editing a saved CSV file, be sure to observe the following rules. Otherwise, the VoIP phonebook settings may not load properly into the RoIP gateway.

	A	B	C	D	E	F	G
1	#	VE-PG4	VoIP telephone directory	Setting file			
2	#	Firm Ver.					
3	#	File Ver.					
4	#Index	Name	Phone number	SIP URI	_	_	_
5	1	telephone1	tel:7000	sip:icom7000@telephone.voip.net	voip		
6	2	telephone2	tel:7100	sip:icom7100@telephone.voip.net	voip		

Column	Title	Description
A	Index	1 ~ 1000 Do not duplicate the number.
B	Name	Up to 30 characters
C	Phone Number	“tel:” and up to 31 digits (0~9, #,*)
D	SIP URI	Enter either of the following format, up to 63 characters sip:[SIP user name]@[Destination IP address] sip:[SIP user name]@[Destination host name or domain name]
E	--	Fixed to “voip”

• The lines that begins with “#” are comments.
• Delete unnecessary lines.

VoIP Phonebook screen

IP Line Settings > VoIP Phonebook

■ VoIP Phonebook Entry

Enter the VoIP phone number to use for the Peer to Peer telephone call.

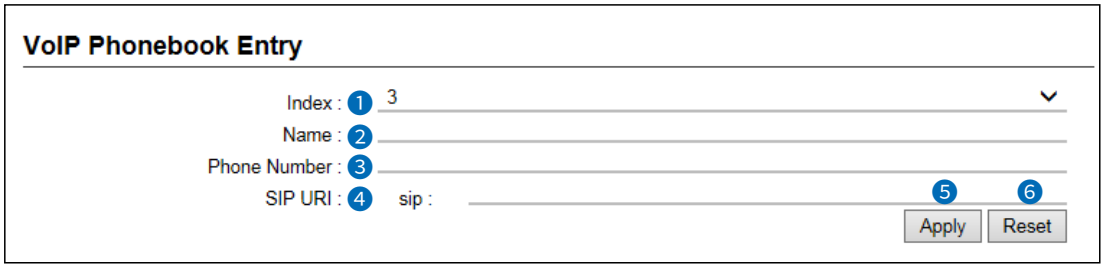

❶Index ..... Select the index number for each entry.
- Range: 1 ~1000

❷Name ..... Enter the callee name up to 31 characters.

❸Phone Number ..... Enter the phone number.
ⓘ When communicating in Peer to Peer, enter the numbers and symbol (#, *).
ⓘ Do not use numbers for the emergency calls in your area, otherwise, you cannot make an emergency call.

❹SIP URI ..... Enter the SIP URI up to 63 characters in either format as shown below.
- sip: [SIP username]@[VE-PG4 IP address]
- sip: [SIP username]@[Host name.domain name]

❺<Apply> ..... Click to apply the settings.

❻<Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

VoIP Phonebook screen

IP Line Settings > VoIP Phonebook

■ List of VoIP Phonebook Entries

Displays the list of VoIP phone numbers entered in “VoIP phonebook entry.”

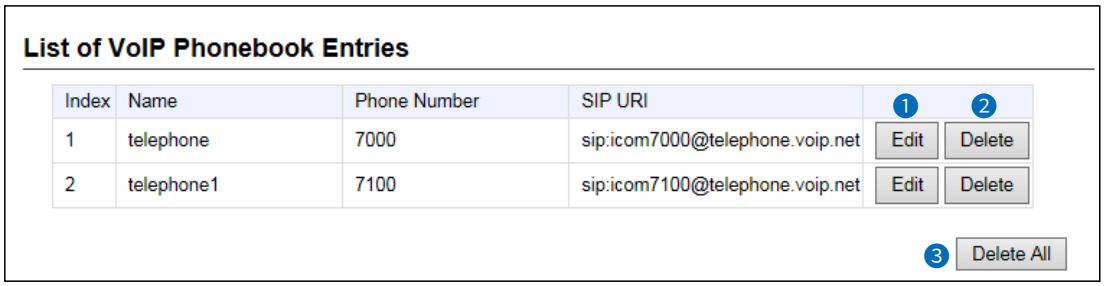

❶ **<Edit>** ..... Click to edit the entry.

❷ **<Delete>** ..... Click to delete the entry.
ⓘ You cannot restore after clicking <Delete>.

❸ **<Delete All>** ..... Click to delete all entries.
ⓘ You cannot restore after clicking <Delete All>.

Basic screen 11-2
■ Basic 11-2
Special Number screen 11-3
■ Common Special Number 11-3
■ Telephone Special Number 11-4
■ Transceiver Special Number 11-6
■ Transceiver Call Prefix 11-7
■ External Call Routing Number 11-7
Extension screen 11-8
■ Extension 11-8
■ List of Extension Entries 11-11
■ Extension Batch Setting 11-12
■ Extension Detail 11-13
Extension Group screen 11-15
■ Extension Group Entry 11-15
■ List of Extension Group Entries 11-18
Inbound Call screen 11-19
■ Inbound Call 11-19

Basic screen

PBX > Basic

■ Basic

The common setting for the telephones in the network system.

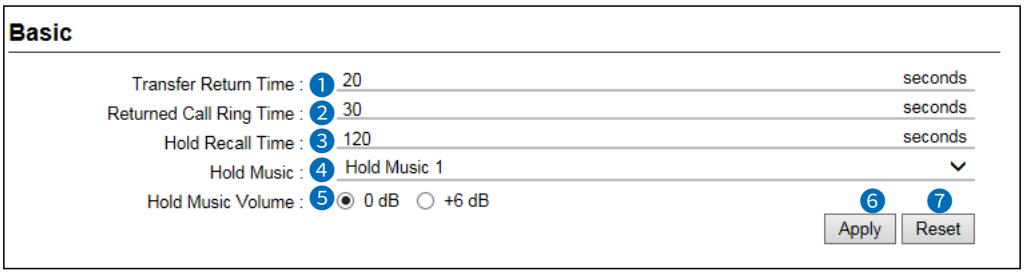

❶Transfer Return Time ..... Set the time period until a transferred call is returned, if the call is not picked up in that period of time. (Default: 20)
- Range: 0 ~ 99 (seconds)

ⓘ When “0” has set, you cannot turn back a transferred call.

❷Returned Call Ring Time ... Set the ring time when a transferred call has returned. (Default: 30)

ⓘ Range: 1 ~ 99 (seconds)

❸Hold Recall Time ..... Set the period of time until Notification tone rings, when no one picks up a held call. (Default: 120)
- Range : 0 ~600 (seconds)

ⓘ When “0” has been set, you cannot receive the Notification tone.

❹Hold Music ..... Set the music on hold. (Default: Hold Music 1)
- Hold Music 1: For Elise
- Hold Music 2: Greensleeves
- Hold Music 3: Home on the range
- Hold Music 4: Canon
- Hold Music 5: Minuet

❺Hold Music Volume ..... Set the audio volume of the music on hold (Default: 0 dB)
- Range: 0 dB (calm) or +6 dB (loud)

❻<Apply> ..... Click to apply the entries.

❼<Reset> ..... Click to reset the settings.

ⓘ You cannot reset after clicking <Apply>.

Special Number screen

PBX > Special Number

■ Common Special Number

Sets the common Special Numbers that can be used by both the transceiver and telephones.

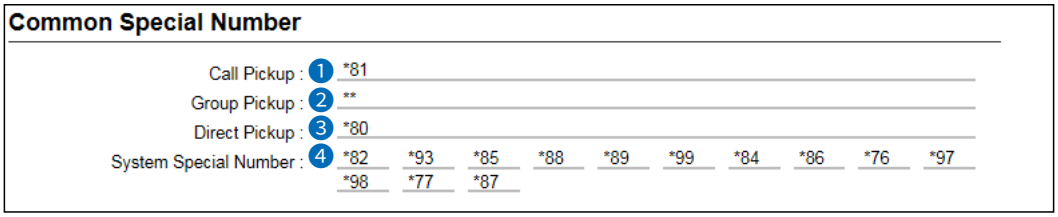

❶Call Pickup ..... The number to pick up a call from another extension. (Default: *81)

❷Group Pickup ..... The number to pick up a call from another extension in the same Group. (Default: **)

ⓘ You can pick up call from a particular group, by pushing the number set in this setting and the Pickup Group No. (See Section 13)

❸Direct Pickup ..... The number to pick up a call from a particular extension. (Default: *80)

ⓘ You can pick up call to a particular extension, by pushing the number set in this setting, and then the extension number.

❹System Special Number ... The Special Numbers are those for internal system management. You cannot assign these numbers as extension numbers or as other Special Numbers.

(Default: *82, *93, *85, *88, *89, *99, *84,*86, *76, *97, *98, *77, *87)

Special Number screen

PBX > Special Number

■ Telephone Special Number

Sets the special numbers that can be used only by the telephones.
Options: Up to 3 digit numbers and characters (0~9, #, *)

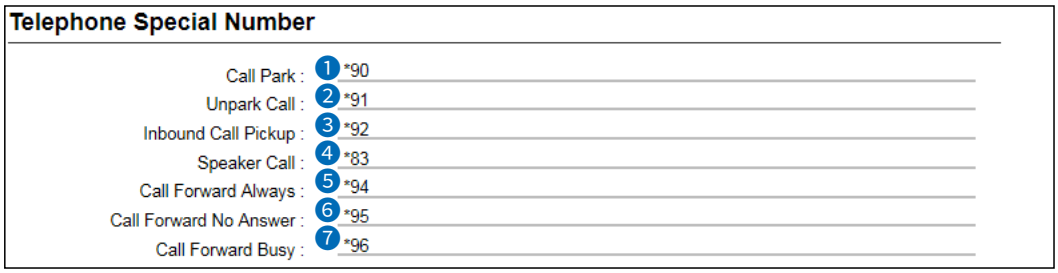

1 Call Park .....

You can park a call by pushing:
The number that has been set in this setting, and then the park number or the flexible button (01 ~24) that the Park function is assigned.
(Default: *90)

2 Unpark Call .....

You can unpark a call by pushing:
The number that has been set in this setting, and then the park number or the flexible button (01 ~24) that the Park function is assigned.
(Default: *91)

3 Inbound Call Pickup .....

The Special Number, to pick up or unpark an inbound call from an extension in the same Group. (Default: *92)

ⓘ To use this function, set “External Call Status” function to a flexible button (01 ~ 24) in the Button Assignment setting. (See Section 13.)

To pick up an inbound call from the KX series with another telephone:

- Dial the number in this setting (for example: *92), and the Button number (01 ~ 24) of the inbound or parked call.
  For example, dial “*9203” to pick up the parked call to the Button number 03.

To pick up an inbound call from another telephone than the KX series:

- Dialing “*81” is recommended because the incoming phone cannot recognize the External Call Status Button number.

4 Speaker Call .....

You can make a speaker call to an extension by pushing:
the number that has been set in this setting, and then the extension number. (Default: *83)

ⓘ This function is usable only for calls to KX series telephones.

5 Call Forward Always.....

The number to forward or cancel forwarding all the incoming call.
(Default: *94)

ⓘ To set the forwarding function, dial “*94“ and the destination extension number you want to forward a call. (The alarm “PiPi, PiPi” sounds.)
ⓘ To cancel forwarding, dial “*94.” (The alarm “Pi-Pi-, Pi-Pi-” sounds.)

Special Number screen

PBX > Special Number

■ Telephone Special Number

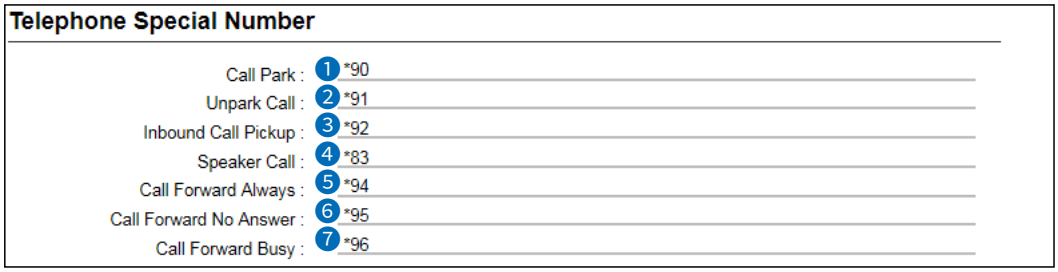

6 Call Forward No Answer … The number to forward when an incoming call does not answer in a certain period of time. (Default: *95)

ⓘ To set the forwarding function, dial “*95“ and the destination extension number you want to forward a call. (The alarm “PiPi, PiPi” sounds.)

ⓘ To cancel forwarding, dial “*95.” (The alarm “Pi-Pi-, Pi-Pi-” sounds.)

7 Call Forward Busy…… The number to forward when the extension is busy. (Default: *96)

ⓘ To set the forwarding function, dial “*96“ and the destination extension number you want to forward a call. (The alarm “PiPi, PiPi” sounds.)

ⓘ To cancel forwarding, dial “*96.” (The alarm “Pi-Pi-, Pi-Pi-” sounds.)

Special Number screen

PBX > Special Number

■ Transceiver Special Number

Sets the special numbers that can be used only by the transceivers.
Options: Up to 3 digit numbers and characters (0~9, #, *)

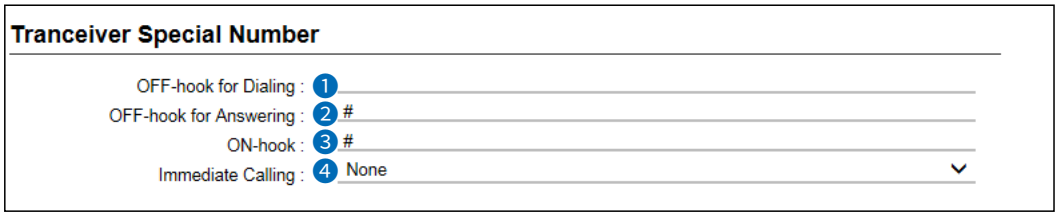

❶ OFF-hook for Dialing …… Set the tone signal starting to dial.
Hold down this key for a while, then push the number keys to call.
(Default: Blank)

ⓘ Only when this option is set to a 1 digit number, a transceiver enters off-hook condition by holding this key for the set period of time in OFF-hook Detect Timer, then you will be ready to dial.
Also you have to enable the DTMF settings in Connection Port Settings.

❷ OFF-hook for Answering … Set the tone signal to receive the telephone call on a transceiver.
(Default: #)

ⓘ Only when this option is set to a 1 digit number, a transceiver can answer a telephone call by holding this key for the set period of time in OFF-hook Detect Timer. Also you have to enable the DTMF settings in Connection Port Settings.

ⓘ When no tone signal has set, the call is automatically received.

❸ ON-hook …… Set the tone signal to end (disconnect) the call.
Push this key to hook the call on a transceiver. (Default: #)

ⓘ Only when this option is set to a 1 digit number, a transceiver can cancel a telephone call by holding this key for the set period of time in OFF-hook Detect Timer. Also you have to enable the DTMF settings in Connection Port Settings.

❹ Immediate Calling …… Set the DTMF code for immediately transmitting the code.
(Default: None)

Special Number screen

PBX > Special Number

■ Transceiver Call Prefix

Sets the prefix to call a transceiver from an extension, by dialing or using the DID (Direct Inward Dialing) function.

Options: Up to 4 digit numbers and characters (0~9, #, *)

ⓘ To make an individual call, dial the Individual Call prefix, and then dial the Individual number of the transceiver.
ⓘ To make a Group call, dial the Group Call prefix, and then dial the Group number of the transceiver.
ⓘ To make an all call, dial the All Call prefix.

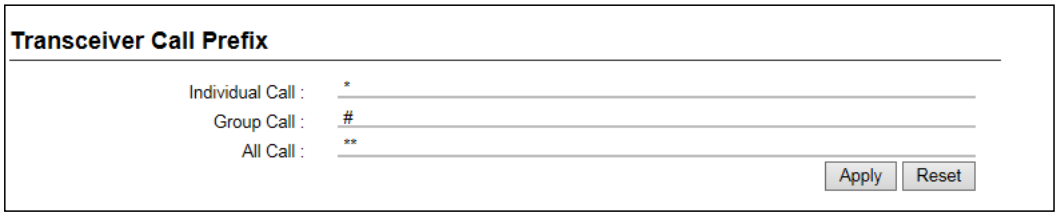

PBX > Special Number

■ External Call Routing Number

The routing number to acquire a specific outline telephone number, other than that has set in Extension Settings. (PBX > Extension > Extension Settings)

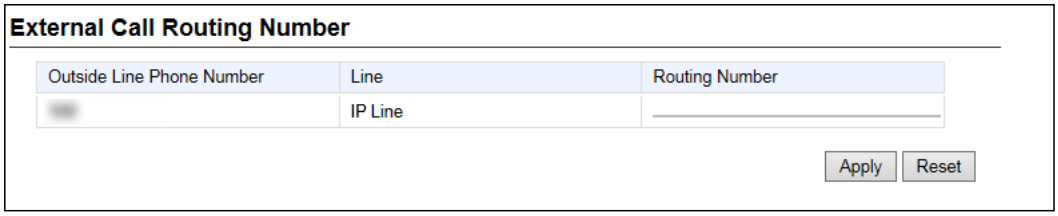

Routing Number ..... Enter up to 7 digit numbers and character (# or *) for each phone number.
When dialing a routing number first, you can make an outside line call using the specified outside line telephone number.
ⓘ Be sure that the routing number does not conflict with other Special Numbers or extension numbers.

Extension screen

PBX > Extension

■ Extension

Sets each extension (IP phone) details.
* Do not duplicate the Extension Group numbers and extension numbers.
The set status is displayed on the List of Extension Group Entries.
(PBX > Extension Group > List of Extension Group Entries)

Port Type: SIP Phone (Automatic Detection)

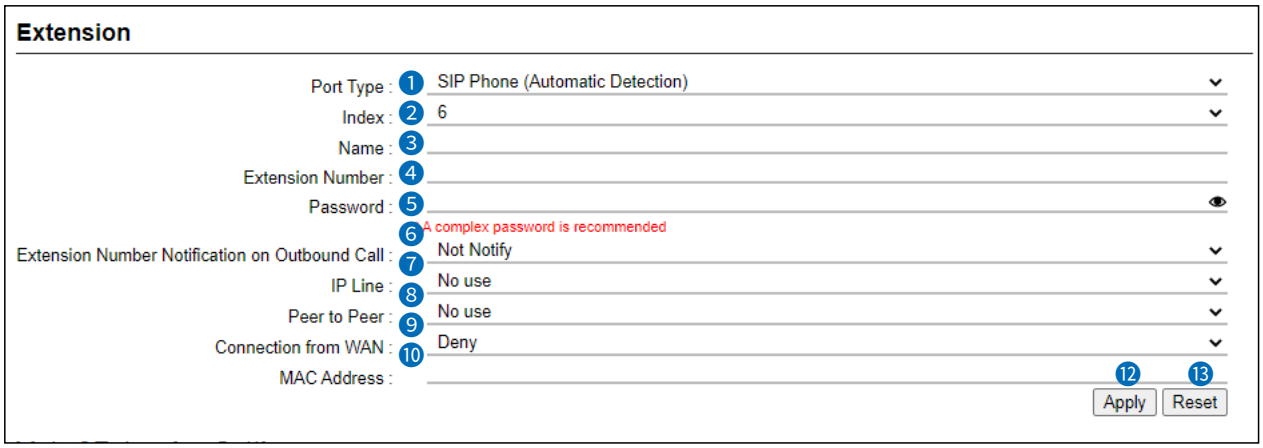

Port Type: Converter Bridge

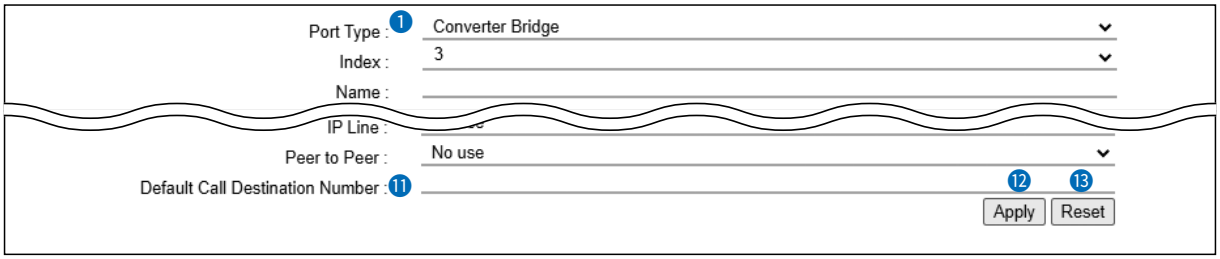

❶ Port Type ..... Set the type of connected device (port.)
(Default: SIP Phone (Automatic Detection))

❷ Index ..... Set the index of the device.
• Range: 1 ~ 25 for SIP phones, 1 ~ 20 for converter bridges

❸ Name ..... Set the name of the device up to 31 characters.

❹ Extension Number..... Set the extension to a 2 to 7 digit number.

❺ Password ..... Set the password to connect to the RoIP gateway up to 31 characters.
ⓘ The password is only for a SIP phone.

Extension screen

PBX > Extension

■ Extension

Port Type: SIP Phone (Automatic Detection)

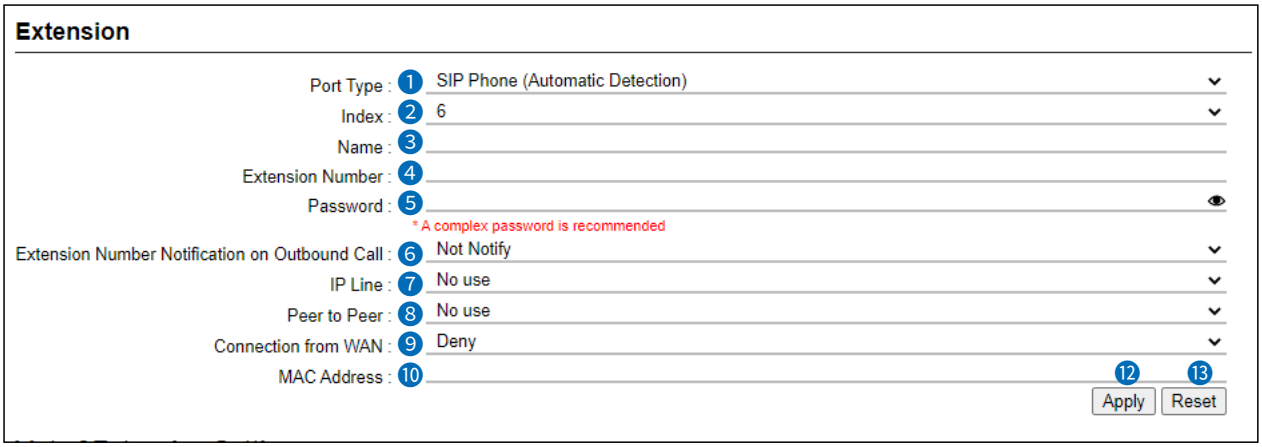

Port Type: Converter Bridge

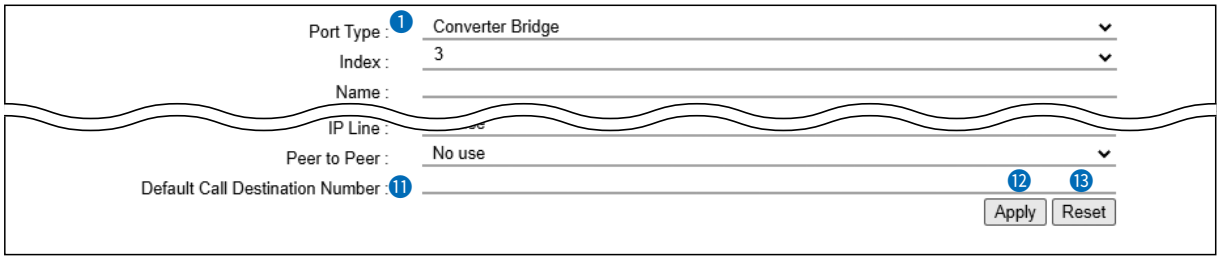

6 Extension Number Notification on Outbound Call ..... Set whether or not to notify your extension number to a destination on an outbound call. (Default: Not Notify)

- **Not Notify**: Depends on the setting in the Calling Number Notice setting. (IP Line settings > IP Line > List of SIP Server Entries > Calling Number Notice)
- **Notify**: Notifies the Extension Number to the destination.

7 IP Line ..... Set an IP phone number for the preset outbound. (Default: No use)

8 Peer to Peer..... Set a SIP Username for an outbound. (Default: No use)

Extension screen

PBX > Extension

■ Extension

Port Type: SIP Phone (Automatic Detection)

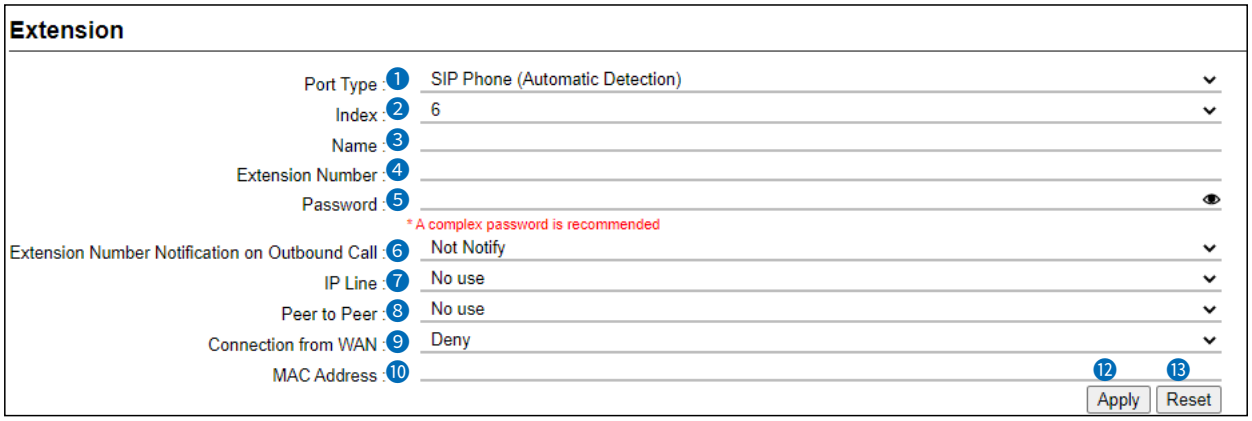

Port Type: Converter Bridge

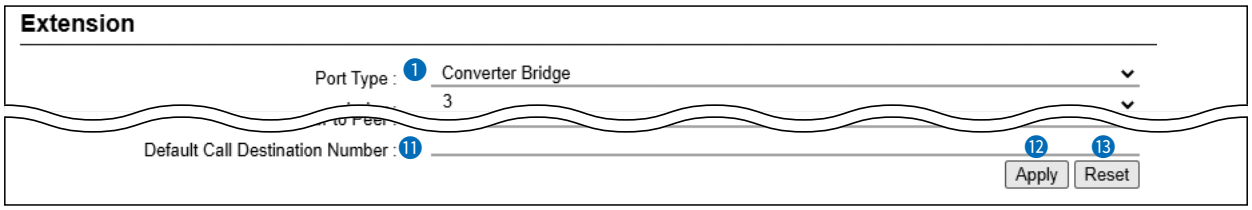

9 Connection from WAN ... Displayed only when the Port Type (1) has set to SIP phone.
Set whether or not to access the extension from the WAN.
ⓘ Be sure to set a long and complicated Password (5).

10 MAC Address ..... Enter the MAC Address of the Panasonic KX series SIP phone.
The MAC Address is settable only when the Port Type (1) is set to other than “SIP Phone (Standard),” “SIP Phone (WLAN),” “Transceiver Controller Telephone Connection,” and “Converter Bridge.”

11 Default Call Destination Number ..... Displayed when the Port Type (1) has set to “Converter Bridge.”
Enter a destination phone number when the device connected to the Port Type (1) makes a call.

12 <Apply> ..... Click to apply the entries.

13 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Extension screen

PBX > Extension

■ List of Extension Entries

The List of Extension entries.
ⓘ The Extension Group List is on the Extension Group screen. (PBX > Extension Group)

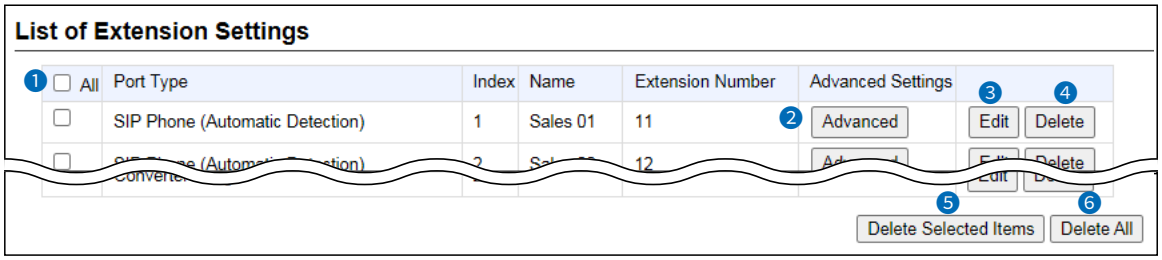

❶ Extension check box ..... Click to select that you want to delete or copy the setting. Click “All” to check or uncheck all the items in the list.

❷ <Advanced> ..... Click to display the Extension Detail sub window.

❸ <Edit> ..... Click to edit the settings in the Extension Settings.

❹ <Delete> ..... Click to delete an entry.

❺ <Delete Selected Items> ... Click to delete the selected entries.
ⓘ You cannot restore after clicking <Delete Selected Items>.

❻ <Delete All> ..... Click to delete all the entries.
ⓘ You cannot restore after clicking <Delete All>.

Extension screen

PBX > Extension

■ Extension Batch Setting

You can register extensions by serial numbering, or copy the setting contents to another extension at once.

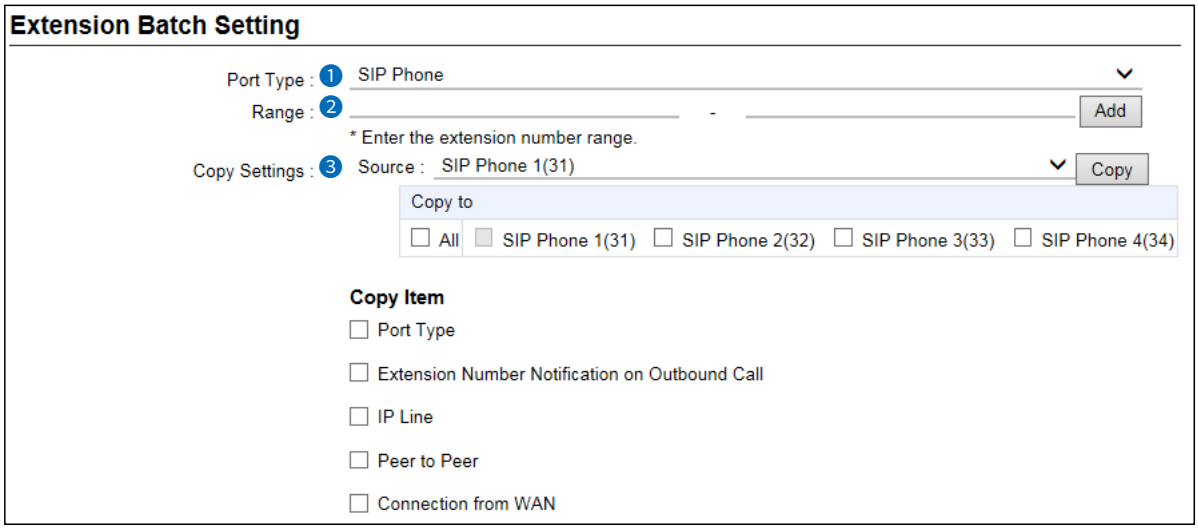

1 Port Type ..... Select the Port Type that you want to copy the settings.
(Default: SIP Phone)

2 Range ..... Enter the start number and the end number of the extension number range you want to copy to, and then click <Add> to add the entries.

3 Copy Settings ..... Select the setting options you want to copy and then click <Copy> to copy the settings.

Copying the settings

1. Set the source extension details in the “Extension” above on the screen.
2. Enter the range of extension numbers to those you want to copy.
3. Click <Add> to add the extension numbers.
4. In “Source,” select a source extension number that you want to copy.
5. In “Copy to,” check the extensions to those you want to copy the source settings.
6. In “Copy Item,” check the settings to those you want to copy the source settings.
7. Click <Copy> to copy the settings.

Extension screen

PBX > Extension

■ Extension Detail

Displayed by clicking <Advanced> in “List of Extension Settings.”
(PBX > Extension > List of Extension Settings)

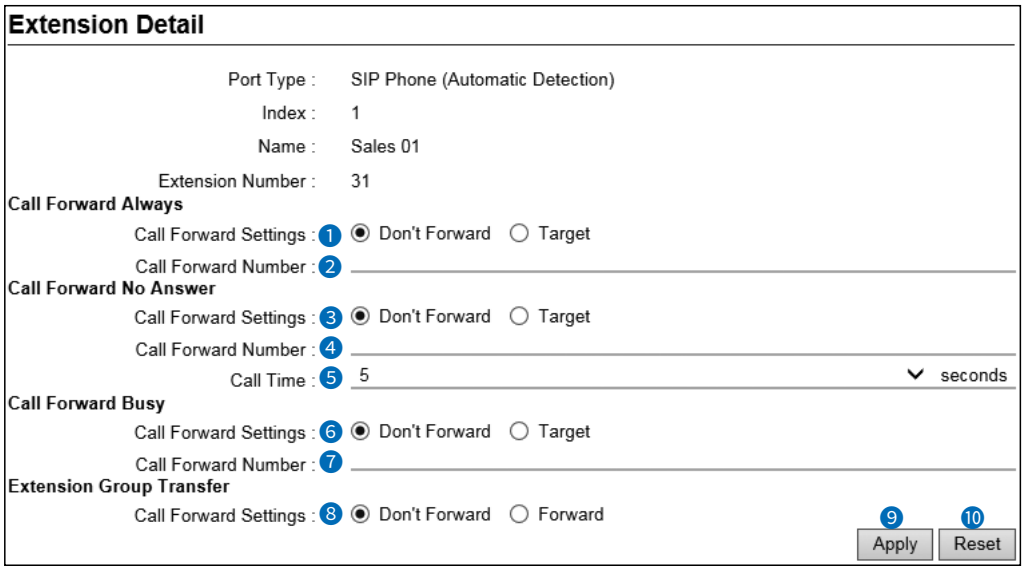

❶ Call Forward Settings ..... Select whether or not to forward calls when a call cannot arrive at the destination. (Default: Don’t Forward)

❷ Call Forward Number ..... Set the destination phone number of up to 31 digits. (Default: Blank)
ⓘ The KX series telephone automatically forwards calls to the set destinations.

❸ Call Forward Settings ..... Select whether or not to forward calls when the extension does not answer in the set period of time. (Default: Don’t Forward)

❹ Call Forward Number ..... Set the destination phone number of up to 31 digits. (Default: Blank)

❺ Call Time ..... Set the delay time to start forwarding. (Default: 5)
• Range: 5 ~ 60 (seconds) in 5 second steps

Extension screen

PBX > Extension

■ Extension Detail

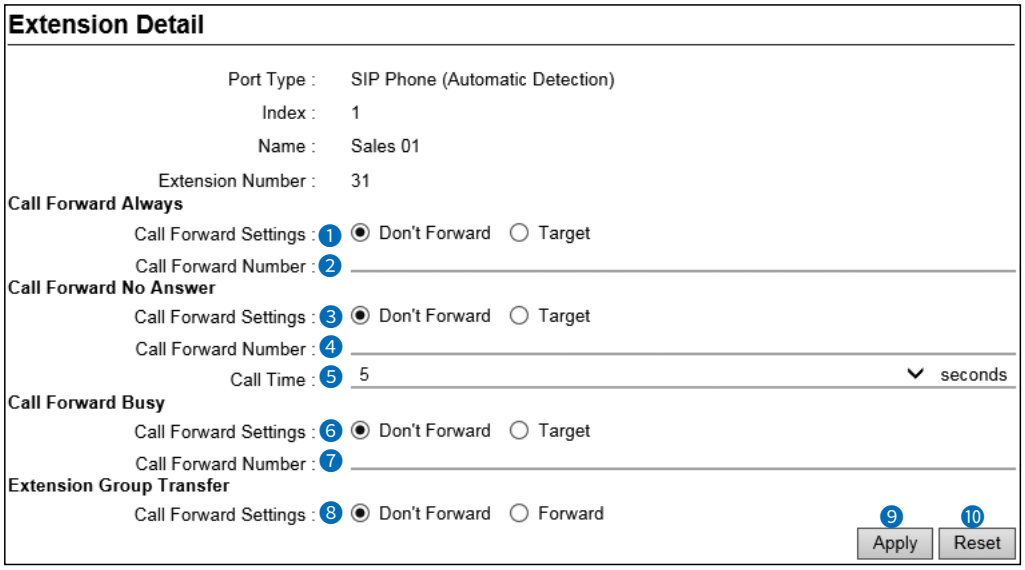

⑥ Call Forward Settings ..... Select whether or not to forward calls from another extension when the extension is busy. (Default: Don't Forward)

⑦ Call Forward Number ..... Set the destination phone number of up to 31 digits. (Default: Blank)

⑧ Call Forward Settings ..... Select whether or not to forward inbound calls to the Extension Group. (Default: Don't Forward)

⑨ <Apply> ..... Click to apply the entries.

⑩ <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Extension Group screen

PBX > Extension Group

You can group up to 50 extension numbers into an Extension Group. You can select the extension (SIP phone) to be incoming and the extension not to receive incoming within the set group.

■ Extension Group Entry

Used to newly enter an extension group number.
* Do not duplicate the Extension numbers and Extension Group numbers.
You can check the extension number and its model name on the “Extension” screen. (PBX > Extension)

Ringing Sequence: Simultaneous

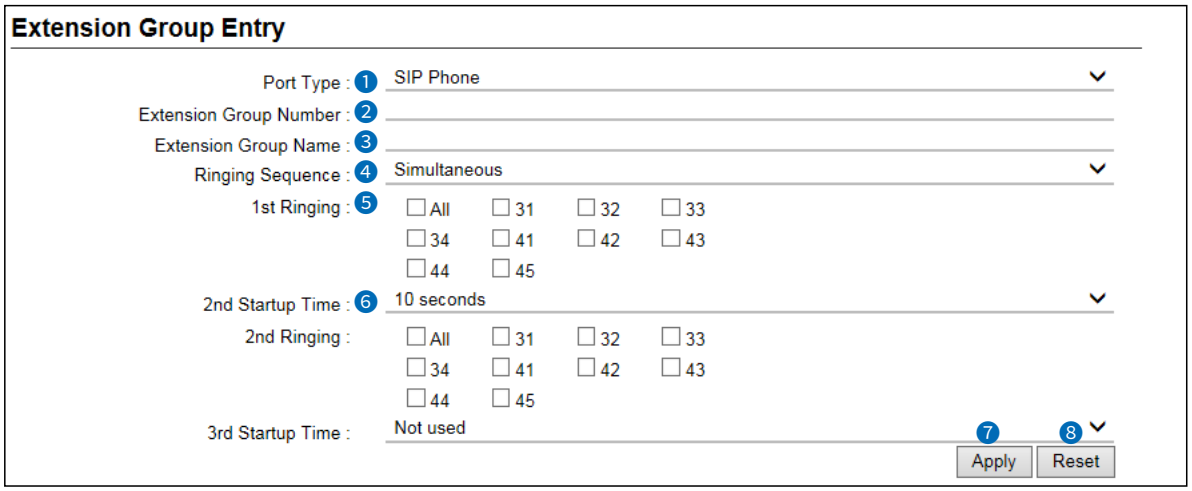

❶Port Type ..... Select the Port Type that you want to copy the settings.
(Default: SIP Phone)

❷Extension Group Number Enter an Extension Group number.
• Range: Number in 2 ~ 7 digits

❸Extension Group Name ... Enter the Extension Group name of up to 31 characters.

❹Ringing Sequence..... Select the action when a call is incoming.
Simultaneous: In Simultaneous ringing sequence, when the primary receiver cannot respond for a certain period of time, you can change to the secondary receiver. You can set the receiver’s extension from the primary to the tertiary for a call.
Sequential: In Sequential ringing, you can set the ringing extension group.

Extension Group screen

PBX > Extension Group

■ Extension Group Entry

Ringing Sequence: Simultaneous

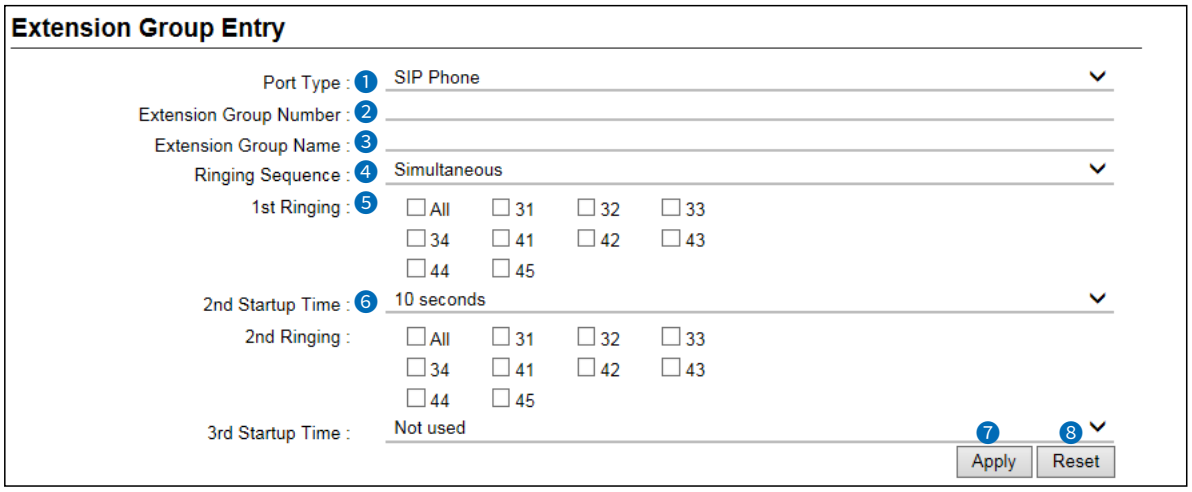

5 1st Ringing ..... Check the extension numbers to Ring when a call has arrived at the Extension Group.
- You can also set “2nd Ringing” and “3rd Ringing” by setting the “2nd Startup Time” (6) and “3rd Startup Time.”

6 2nd Startup Time ..... Set the period of time until the secondary ring starts when the 1st Ringing extensions do not answer. (Default: Not used)
- Range: Not used, or 10 ~ 60 (seconds) in 5 second steps

7 <Apply> ..... Click to apply entries.

8 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Extension Group screen

PBX > Extension Group

■ Extension Group Entry

Ringing Sequence: Sequential

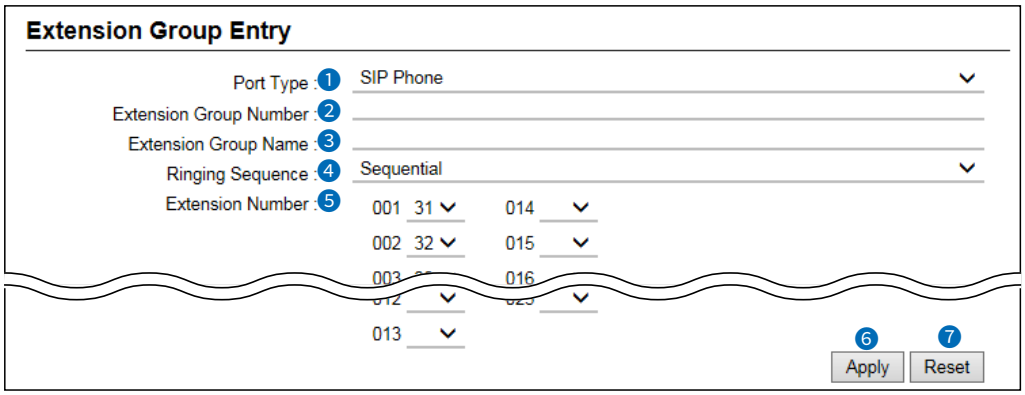

1 Port Type ..... Select the Port Type that you want to copy the settings.
(Default: SIP Phone)

2 Extension Group Number Enter a phone number to an Extension Group.
Range: number in 2 ~ 7 digits

3 Extension Group Name ... Enter the Extension Group name of up to 31 characters.

4 Ringing Sequence ..... Select the action when a call is incoming.
Simultaneous: In simultaneous ringing sequence, when the primary receiver cannot respond for a certain period of time, you can change to the secondary receiver. You can set the receiver's extension from the primary to the tertiary for a call.
Sequential: In Sequential ringing, you can set the ringing extension group.

5 Extension Number..... Select the action when a call is incoming.

6 <Apply> ..... Click to apply entries.

7 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Extension Group screen

PBX > Extension Group

■ List of Extension Group Entries

Displays the list of Extension Group entries.

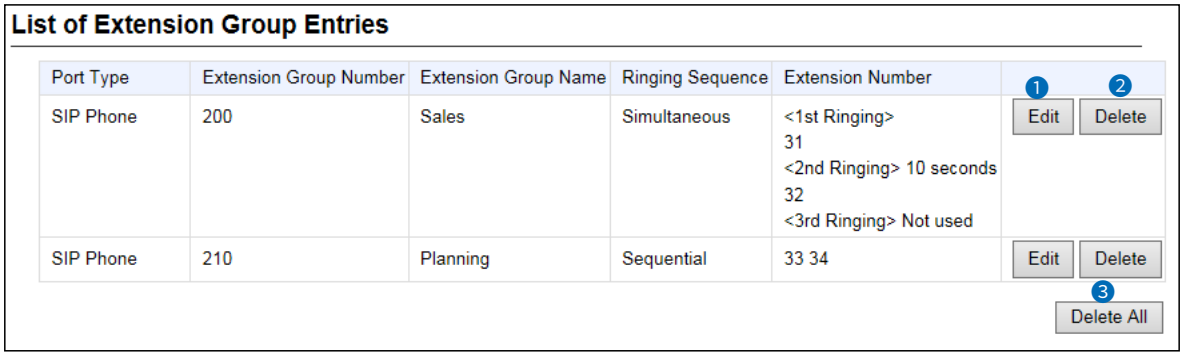

❶ **<Edit>** ..... Click to edit an entry.

❷ **<Delete>** ..... Click to delete an entry.
ⓘ You cannot restore after clicking <Delete>.

❸ **<Delete All>** ..... Click to reset all the entries.
ⓘ You cannot restore after clicking <Delete All>.

Inbound Call screen

PBX > Inbound Call

■ Inbound Call

Sets the destination extension or queuing of Inbound Calls.

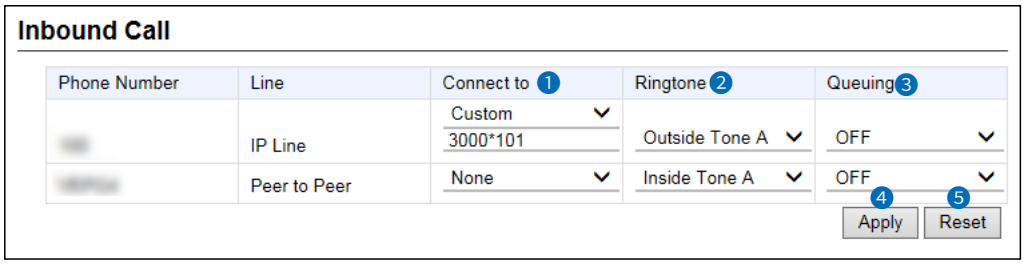

1 Connect to ..... Set the destination extension of Inbound calls to the specified phone number (dial-in number.) (Default: None)
You can set an extension number or an extension group number.
ⓘ If you select “Custom,” you can set the Individual ID of a transceiver like an example above.
ⓘ To set a Dial-in number, select a DID box in the “DID Settings.” (PBX Advanced Settings > DID > DID Settings)

2 Ringtone ..... This setting is only for the KX series SIP phones.
Set a Ringtone (pattern) for each phone number.
(Default for IP Line: Outside Tone A, for Peer to Peer: Inside Tone A)

- **Outside Tone A ~ C**: Ringtone pattern for an external call.
- **Inside Tone A ~ C**: Ringtone pattern for an internal call.
- **Discrimination in the number**: Automatically selects a Ringtone, depending on the phone number of an incoming call.

3 Queuing ..... If set to ON, the Ringing Tone is returned to a caller until the destination phone number is ready to arrive the call, even when the destination phone number is busy, or another request is incoming to it.
(Default: OFF)

4 <Apply> ..... Click to apply the entries.

5 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

PBX TRANSCEIVER CALL SETTINGS

Section 12

Callee ID to Phone Number screen 12-2
- ■ Save or Write the Callee ID to Phone Number Setting 12-2
- ■ Callee ID to Phone Number 12-3
- ■ List of Callee ID to Phone Number Entries 12-4

Outbound Call Restriction screen 12-5
- ■ Outbound Call Restriction 12-5
- ■ Target ID Entry 12-6
- ■ List of Target ID Entries 12-6

Callee ID to Phone Number screen

PBX Transceiver Call Settings > Callee ID to Phone Number

■ Save or Write the Callee ID to Phone Number Setting

The common setting for the telephones in the network system.

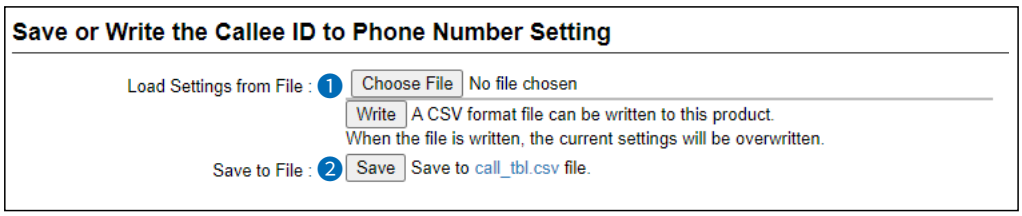

❶Load Settings from File … You can load the saved Callee ID to Phone Number settings from a CSV format file.
Click <Choose File> and select the setting file (call_tbl.csv) from the displayed list, and then click <Open>.
Confirm the correct file is selected, and then click <Write> to load the settings from the selected file.
ⓘ Note that the previous settings are deleted when the setting file is loaded.

❷Save to File …… Saves the settings in the “List of Callee ID to Phone Number Entries” to a CSV format file.
Click <Save> and select a folder to save the file into.
You can edit the saved file in a spreadsheet.

Callee ID to Phone Number screen

PBX Transceiver Call Settings > Callee ID to Phone Number

■ Callee ID to Phone Number

Enter phone numbers that the RoIP gateway dials to call up SIP phones, when making calls from linked transceivers.

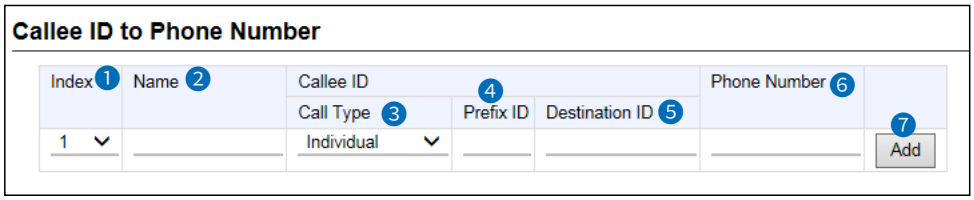

❶ Index ..... The index assigned for entry.
- Range: 1 ~ 1000

❷ Name ..... Enter a name of up to 31 characters.

❸ Call Type ..... Select the type of call.
Call the destinations that match both of Prefix ID (❹) and Destination ID (❺) settings.

- Individual: Call only a specified radio.
- Group: Call all radios that belong to a specified group.
- All: Call all radios.

❹ Prefix ID ..... Enter the prefix ID of the destination.
- ID range: (Depends on the system mode)

❺ Destination ID ..... Enter the ID of the destination.
- ID range: (Depends on the system mode)

❻ Phone Number ..... Enter the phone number of up to 31 digits.

❼ <Add> ..... Click to add the entry.
ⓘ The registered contents are displayed on the List of Callee ID to Phone Number Entries screen.

Callee ID to Phone Number screen

PBX Transceiver Call Settings > Callee ID to Phone Number

■ List of Callee ID to Phone Number Entries

List of the Callee ID entries.

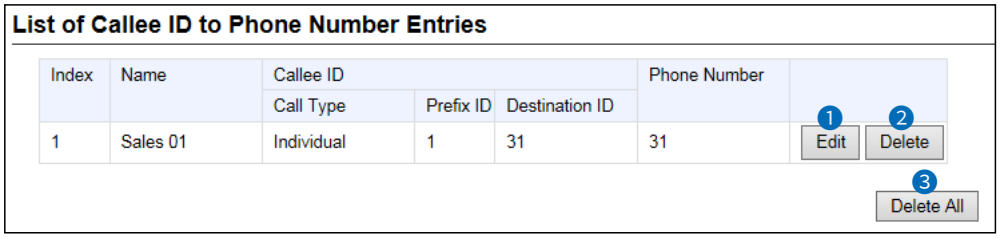

❶ **<Edit>** ..... Click to edit an entry.

❷ **<Delete>** ..... Click to delete an entry.
ⓘ You cannot restore after clicking <Delete>.

❸ **<Delete All>** ..... Click to delete all the entries.
ⓘ You cannot restore after clicking <Delete All>.

Outbound Call Restriction screen

PBX Transceiver Call Settings > Outbound Call Restriction

■ Outbound Call Restriction

Set the restriction rules for making outbound calls by the client transceivers.

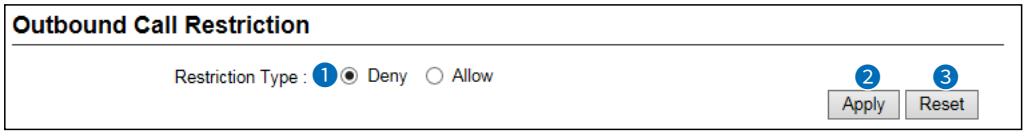

❶ Restriction Type..... Select the type of restriction on the transceivers in the "List of Target ID Entries." (See the next page.) (Default: Deny)
Deny: Inhibits the listed transceivers to make phone calls.
Allow: Allows the listed transceivers to make phone calls.

❷ <Apply> ..... Click to apply the entries.

❸ <Reset> ..... Click to reset the entries.
ⓘ You cannot restore after clicking <Apply>.

Outbound Call Restriction screen

PBX Transceiver Call Settings > Outbound Call Restriction

■ Target ID Entry

Enter the transceivers for the Outbound Call Restriction.

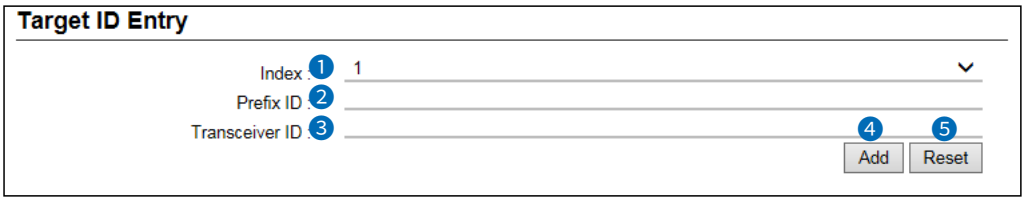

❶Index ..... The index assigned for entry. (Default: 1)
• Range: 1 ~ 1000

❷Prefix ID ..... Enter the prefix ID of the client transceiver.
• ID range: (Depends on the system mode)

❸Transceiver ID..... Enter the ID of the client transceiver.
• ID range: (Depends on the system mode)

❹<Add> ..... Click to add the entry.
ⓘ The registered contents are displayed on the [List of Target ID Entries] screen.

❺<Reset> ..... Click to reset the entries.
ⓘ You cannot restore after clicking <Reset>.

PBX Transceiver Call Settings > Outbound Call Restriction

■ List of Target ID Entries

List of transceivers for the Outbound Call Restriction.

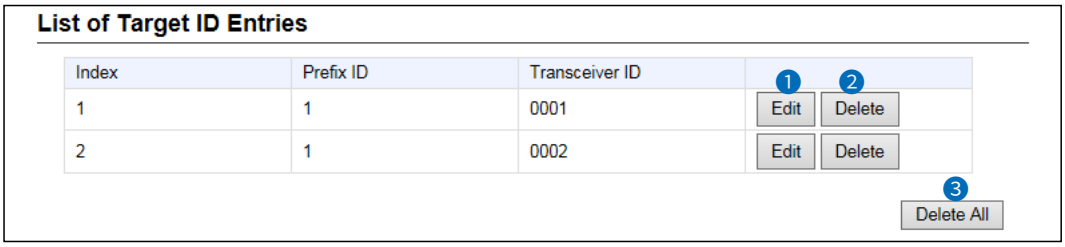

❶<Edit> ..... Click to edit the entry.
ⓘ The registered contents are displayed on the [Target ID Entry] screen.

❷<Delete> ..... Click to delete an entry.
ⓘ You cannot restore after clicking <Delete>.

❸<Delete All> ..... Click to delete all the entries.
ⓘ You cannot restore after clicking <Delete All>.

PBX EXTENSION

Section 13

Telephone (KX-UT Series) screen 13-3
- ■ Telephone Maintenance 13-3
- ■ Telephone Group 13-5
- ■ Telephone Individual Settings (KX-UT Series) **Common Setting** 13-5
- ■ Dial Tone **Common Setting** 13-6
- ■ Busy Tone **Common Setting** 13-7
- ■ Reorder Tone **Common Setting** 13-8
- ■ Ring Back Tone **Common Setting** 13-9
- ■ Hold Alarm **Common Setting** 13-10
- ■ Ringtone Pattern **Common Setting** 13-11
- ■ Ringtone Pattern Assignment **Common Setting** 13-12
- ■ Telephone Common Settings **Group 1 ~ 30** 13-13
- ■ Telephone Individual Settings (KX-UT Series) **Group 1 ~ 30** 13-14
- ■ Button Assignment 13-16

Telephone (KX-HDV Series) screen 13-20
- ■ Telephone Maintenance 13-20
- ■ Telephone Group 13-22
- ■ Dial Tone **Common Setting** 13-23
- ■ Busy Tone **Common Setting** 13-24
- ■ Reorder Tone **Common Setting** 13-25
- ■ Ring Back Tone **Common Setting** 13-26
- ■ Hold Alarm **Common Setting** 13-27
- ■ Ringtone Pattern **Common Setting** 13-28
- ■ Ringtone Pattern Assignment **Common Setting** 13-29
- ■ Telephone Common Settings **Group 1 ~ 30** 13-30
- ■ Telephone Individual Settings (KX-HDV Series) **Group 1 ~ 30** 13-31

Expand Unit (KX-HDV230) Expand Unit 1 ~ 5 screen 13-38
- ■ Telephone Maintenance 13-38
- ■ Telephone Group 13-40
- ■ Telephone Individual Settings (KX-HDV230) 13-41

Phonebook screen 13-42
- ■ Select Group Setting 13-42
- ■ Save or Write the Phonebook 13-43
- ■ Phonebook Entry 13-45
- ■ List of Phonebook Entries 13-47

Transceiver Controller Telephone Connection screen 13-48
■ Transceiver Controller Telephone Connection 13-48
■ Communication 13-49
■ Control 13-50
■ PTT Control Setting 13-56
■ Call Initiation Setting 13-57
■ Notice Tone on the Telephone 13-58
■ Release Timer 13-59
Converter Bridge screen 13-60
■ Converter Bridge 13-60
■ Connection 13-61
■ Communication 13-64
■ Control 13-65
■ DTMF Dialing 13-69
■ PTT Control Setting 13-70
■ Call Initiation Setting 13-71
■ Notice Tone on the Telephone 13-72
■ Release Timer 13-73

Telephone (KX-UT Series) screen

PBX Extension > Telephone (KX-UT Series)

■ Telephone Maintenance

Assigns a Group to each extension number.
The settings for each extension detail can be edited in “List of Extension Entries” (PBX > Extension > List of Extension Entries).

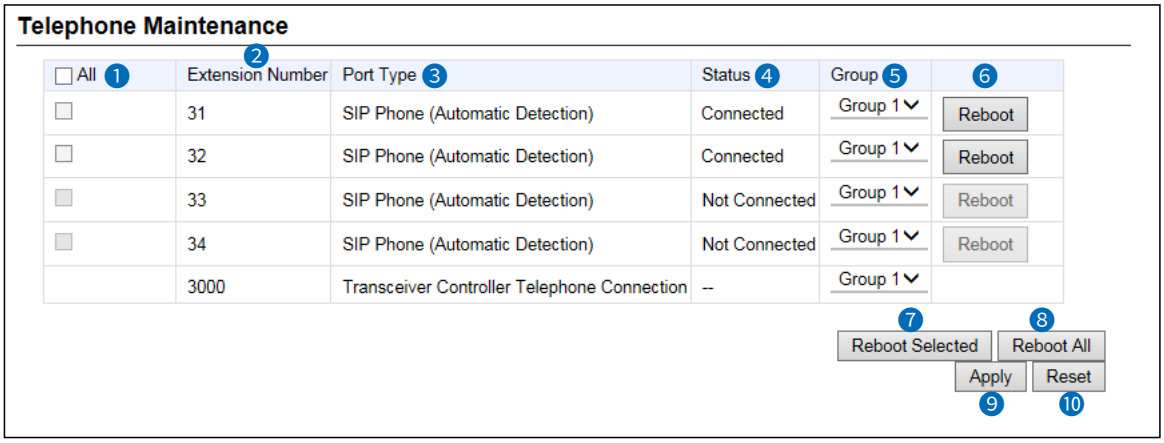

1 Check Box ..... Click to select the extensions if you want to reboot one or more KX series telephones. Click “All” to select all the entries.
ⓘ The extensions where Status (4) is “Not Connected” cannot be selected.

2 Extension Number..... Displays the extension number.

3 Port Type ..... Displays the port type of the Extension.

4 Status ..... Displays the connection status of the telephone.
ⓘ “Not Connected” is displayed for the telephone that is not registered to the SIP server of this RoIP gateway.
ⓘ “—” is displayed for the Converter bridge or the Transceiver Controller Telephone Connection.

5 Group ..... Set the setting Group of the extension. (Default: Group 1)
• Options: Group 1 ~ 30
ⓘ You can customize the flexible function button assignments for each Group.

Telephone (KX-UT Series) screen

PBX Extension > Telephone (KX-UT Series)

■ Telephone Maintenance

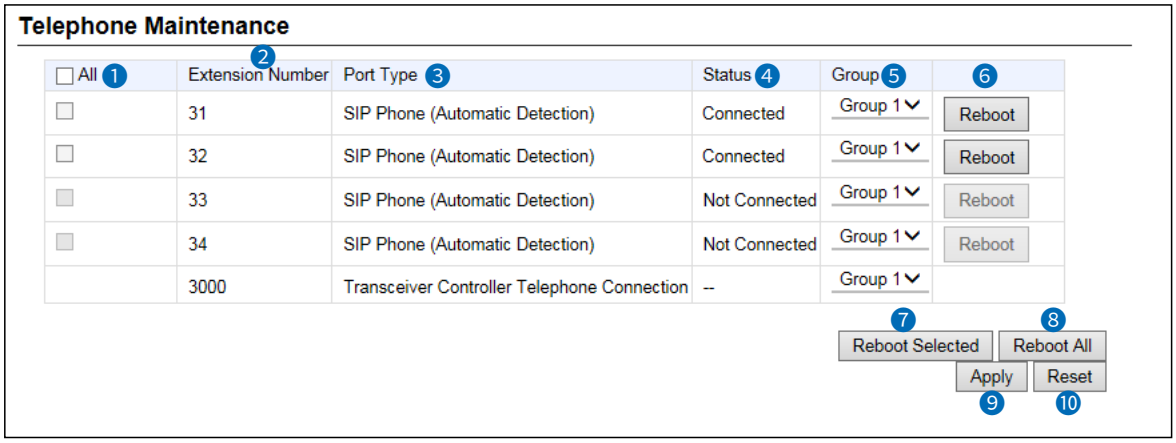

6 <Reboot> ..... Click to reboot the KX series telephone.

7 <Reboot Selected> ..... Click to reboot the selected (with check marks) KX series telephones.

8 <Reboot All> ..... Click to reboot all the KX series telephones whose Status (4) is "Connected" in the list.

9 <Apply> ..... Click to apply the entries.

10 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Telephone (KX-UT Series) screen

PBX Extension > Telephone (KX-UT Series)

■ Telephone Group

Edits the Group setting of the entered extension (telephone)



Select Group Setting ..... Select the setting mode.

- **Common Setting**
  Common settings for the KX-UT Series that are connected to the RoIP gateway, such as tone patterns or volume levels.
- **Group 1 ~ Group 30**
  The custom settings for the KX-UT Series in the selected Group that are connected to the RoIP gateway, such as the flexible button assignments.

PBX Extension > Telephone (KX-UT Series)

■ Telephone Individual Settings (KX-UT Series) Common Setting

The Group setting of the entered extension (telephone)

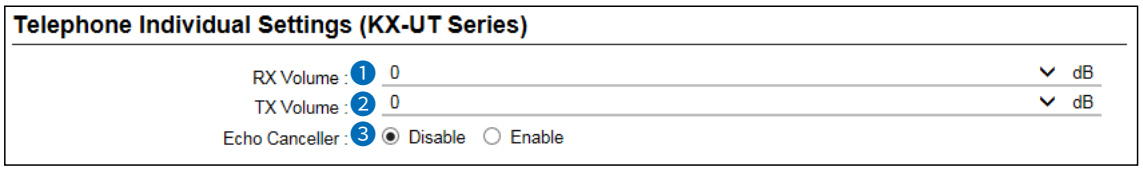

1 RX Volume ..... Set the telephone's receiving audio level. (Default: 0)
- Range: –6 (minimum) ~ +6 (maximum) (dB)

2 TX Volume ..... Set the telephone's transmitting audio level. (Default: 0)
- Range: –6 (minimum) ~ +6 (maximum) (dB)

3 Echo Canceller ..... Enabling this option prevents an echo when transmitting and receiving. (Default: Disable)

Telephone (KX-UT Series) screen

PBX Extension > Telephone (KX-UT Series)

■ Dial Tone Common Setting

Sets the tone when off-hook.

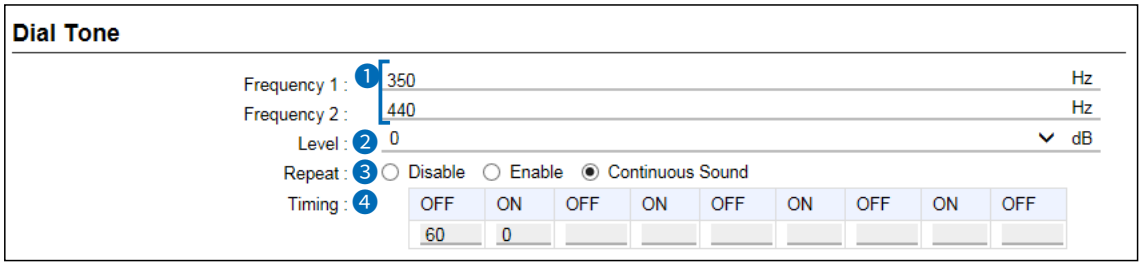

❶ Frequency 1/2 ..... Set the tone frequencies of the Dial tone.
(Default: Frequency 1: 350 / Frequency 2: 440)
- Range: 0 (inaudible), 200 ~ 2000 (Hz)

ⓘ The 350 Hz and 440 Hz tones simultaneously sound at default.

❷ Level ..... Set the audio level of the Dial tone. (Default: 0)
- Range: –24 (minimum) ~ +6 (maximum) (dB)

❸ Repeat ..... Set whether or not to repeat the set tone pattern.
(Default: Continuous Sound)
- **Disable**: Sounds the set pattern in Timing (❹) only once
- **Enable**: Continuously repeats the set pattern in Timing (❹)
- **Continuous Sound**: Continuously sounds frequencies 1 and 2 (❶)

❹ Timing ..... Set the pattern of tone rings and mutes using up to 9 values. The tone sounds for the set period of time in the ON settings, and mutes for the set period of time in the OFF settings.
(Default: 60, 0)
- Range of the first “OFF”: 60 ~ 16000 (milliseconds)
- Range of the others: 51 ~ 16000 (milliseconds)

Telephone (KX-UT Series) screen

PBX Extension > Telephone (KX-UT Series)

■ Busy Tone Common Setting

Sets the tone when the line is busy.

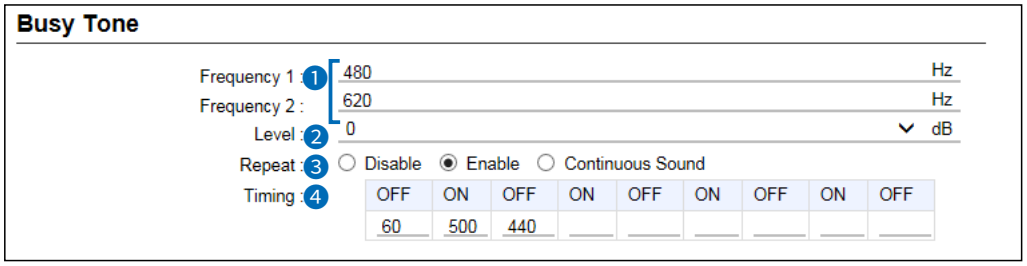

❶ Frequency 1/2 ..... Set the tone frequencies of the Busy tone.
(Default: Frequency 1: 480 / Frequency 2: 620)

- Range: 0 (inaudible), 200 ~ 2000 (Hz)

ⓘ The 480 Hz and 620 Hz tones simultaneously sound at default.

❷ Level ..... Set the audio level of the Busy tone. (Default: 0)

- Range: –24 (minimum) ~ +6 (maximum) (dB)

❸ Repeat ..... Set whether or not to repeat the set tone pattern.
(Default: Enable)

- **Disable**: Sounds the set pattern in Timing (❹) only once
- **Enable**: Continuously repeats the set pattern in Timing (❹)
- **Continuous Sound**: Continuously sounds frequencies 1 and 2 (❶)

❹ Timing ..... Set the pattern of tone rings and mutes using up to 9 values. The tone sounds for the set period of time in the ON settings, and mutes for the set period of time in the OFF settings.
(Default: 60, 500, 440)

- Range of the first “OFF”: 60 ~ 16000 (milliseconds)
- Range of the others: 51 ~ 16000 (milliseconds)

Telephone (KX-UT Series) screen

PBX Extension > Telephone (KX-UT Series)

■ Reorder Tone Common Setting

Sets the Reorder tone.

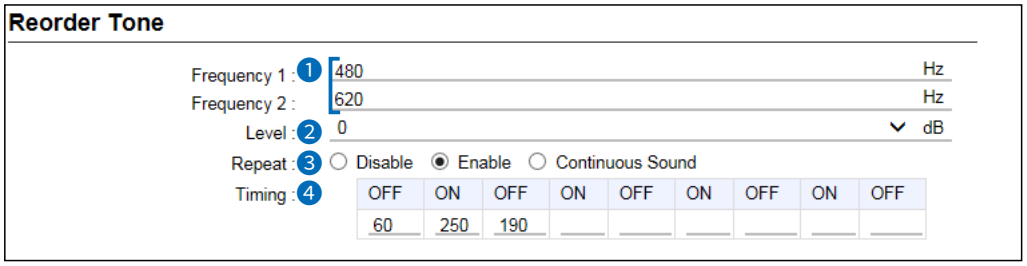

1 Frequency 1/2 ..... Set the tone frequencies of the Reorder tone.
(Default: Frequency 1: 480 / Frequency 2: 620)

- Range: 0 (inaudible), 200 ~ 2000 (Hz)

ⓘ The 480 Hz and 620 Hz tones simultaneously sound at default.

2 Level ..... Set the audio level of the Recorder tone. (Default: 0)

- Range: –24 (minimum) ~ +6 (maximum) (dB)

3 Repeat ..... Set whether or not to repeat the set tone pattern.
(Default: Enable)

- **Disable**: Sounds the set pattern in Timing (4) only once
- **Enable**: Continuously repeats the set pattern in Timing (4)
- **Continuous Sound**: Continuously sounds frequencies 1 and 2 (1)

4 Timing ..... Set the pattern of tone rings and mutes using up to 9 values. The tone sounds for the set period of time in the ON settings, and mutes for the set period of time in the OFF settings.
(Default: 60, 250, 190)

- Range of the first “OFF”: 60 ~ 16000 (milliseconds)
- Range of the others: 51 ~ 16000 (milliseconds)

Telephone (KX-UT Series) screen

PBX Extension > Telephone (KX-UT Series)

■ Ring Back Tone Common Setting

Sets the Ring Back tone.

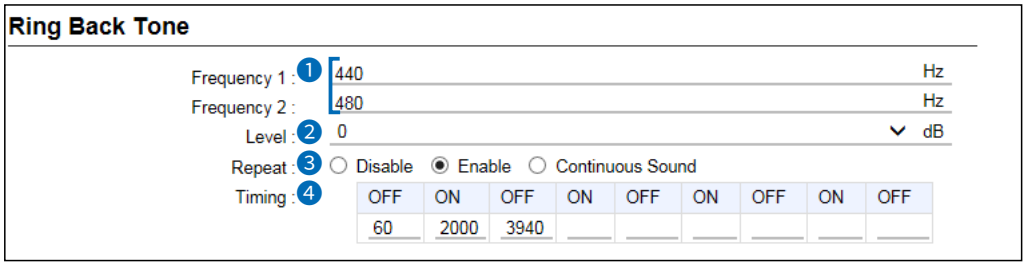

1 Frequency 1/2 ..... Set the tone frequencies of the Ring Back tone.
(Default: Frequency 1: 440 / Frequency 2: 480)
- Range: 0 (inaudible), 200 ~ 2000 (Hz)

ⓘ The 440 Hz and 480 Hz tones simultaneously sound at default.

2 Level ..... Set the audio level of the Ring Back tone. (Default: 0)
- Range: –24 (minimum) ~ +6 (maximum) (dB)

3 Repeat ..... Set whether or not to repeat the set tone pattern.
(Default: Enable)
- **Disable**: Sounds the set pattern in Timing (4) only once
- **Enable**: Continuously repeats the set pattern in Timing (4)
- **Continuous Sound**: Continuously sounds frequencies 1 and 2 (1)

4 Timing ..... Set the pattern of tone rings and mutes using up to 9 values. The tone sounds for the set period of time in the ON settings, and mutes for the set period of time in the OFF settings.
(Default: 60, 2000, 3940)
- Range of the first “OFF”: 60 ~ 16000 (milliseconds)
- Range of the others: 51 ~ 16000 (milliseconds)

Telephone (KX-UT Series) screen

PBX Extension > Telephone (KX-UT Series)

■ Hold Alarm Common Setting

Sets the Hold alarm tone that sounds to alert you that a second call has been held for certain period of time.

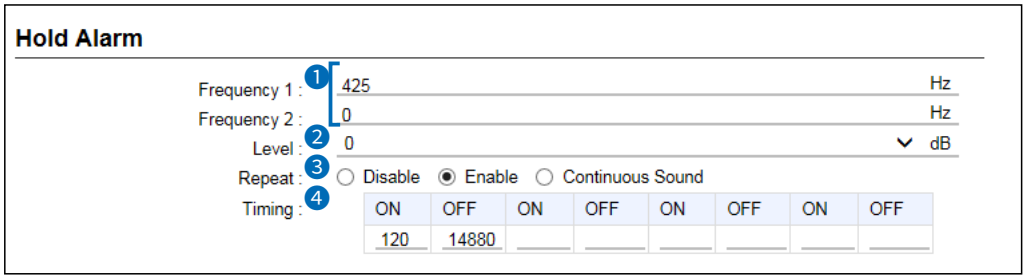

❶ Frequency 1/2 ..... Set the tone frequencies of the Hold alarm.
(Default: Frequency 1: 425 / Frequency 2: 0)
- Range: 0 (inaudible), 200 ~ 2000 (Hz)

❷ Level ..... Set the audio level of the Hold alarm. (Default: 0)
- Range: –24 (minimum) ~ +6 (maximum) (dB)

❸ Repeat ..... Set whether or not to repeat the set tone pattern.
(Default: Enable)
- **Disable**: Sounds the set pattern in Timing (❹) only once
- **Enable**: Continuously repeats the set pattern in Timing (❹)
- **Continuous Sound**: Continuously sounds frequencies 1 and 2 (❶)

❹ Timing ..... Set the pattern of tone rings and mutes using up to 9 values. The tone sounds for the set period of time in the ON settings, and mutes for the set period of time in the OFF settings.
(Default: 120, 14880)
- Range of the first “OFF”: 60 ~ 16000 (milliseconds)
- Range of the others: 51 ~ 16000 (milliseconds)

Telephone (KX-UT Series) screen

PBX Extension > Telephone (KX-UT Series)

■ Ringtone Pattern Common Setting

Sets the Ringtone patterns.

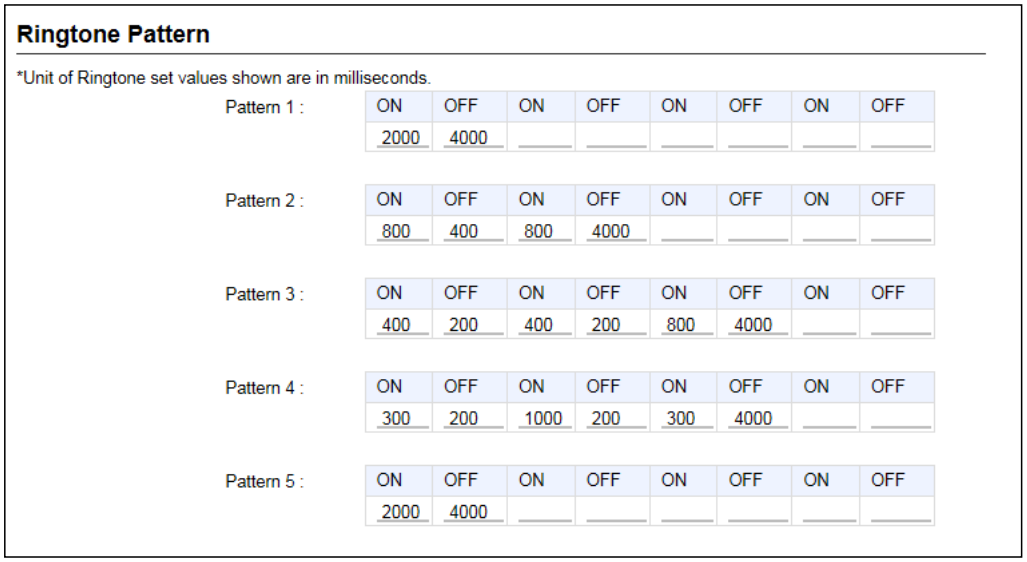

Pattern 1 ~ 5.....

Set the pattern of tone rings and mutes using up to 8 values. The tone sounds for the set period of time in the ON settings, and mutes for the set period of time in the OFF settings.

❍ The default values of Ringtone Patterns

Pattern	ON	OFF	ON	OFF	ON	OFF	ON	OFF
Pattern 1	2000	4000	–	–	–	–	–	–
Pattern 2	800	400	800	4000	–	–	–	–
Pattern 3	400	200	400	200	800	4000	–	–
Pattern 4	300	200	1000	200	300	4000	–	–
Pattern 5	2000	4000	–	–	–	–	–	–

• Range : 51 ~ 5000 (milliseconds)
ⓘ A ring pattern must end with OFF.
ⓘ The ring patterns can be assigned, according to the incoming call type. See the next item for details.

Telephone (KX-UT Series) screen

PBX Extension > Telephone (KX-UT Series)

■ Ringtone Pattern Assignment Common Setting

Assigns the Ringtone pattern of each incoming call group.

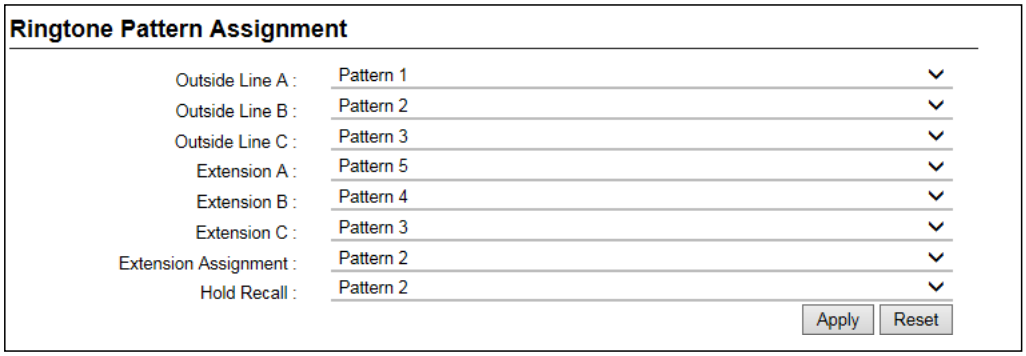

Assign a Ringtone pattern for each incoming call type, according to the setting on the Inbound Call screen. (PBX > Inbound Call)

ⓘ Information

- The incoming call group depends on the notified number of incoming calls.
- The calls from the phone numbers that are entered into extensions A to C are treated as the internal calls.
- For an internal call from other than the entered extensions on the Inbound Call screen, the Ringtone pattern set in the “Extension Assignment” sounds.
- When recalling to a parked telephone, the Ringtone set in the “Hold Recall” sounds.

Telephone (KX-UT Series) screen

PBX Extension > Telephone (KX-UT Series)

■ Telephone Common Settings Group 1 ~ 30

Sets the rules for incoming calls for each Extension Group.

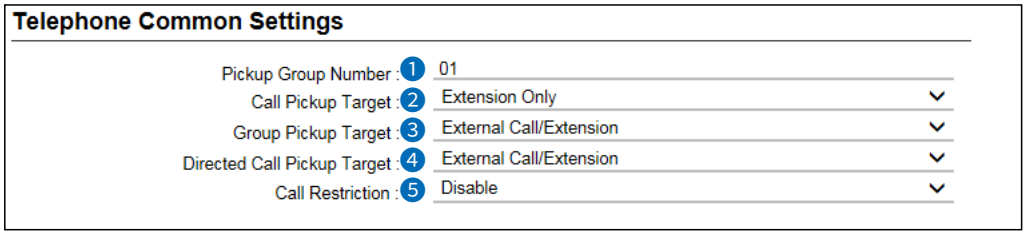

1 Pickup Group Number ..... Enter a pickup group number of up to 7 digits.
(Default: 01 (for the Group1))

ⓘ You can pick up an incoming call of another group extension by dialing the Special Number for the Group Pickup and the Group Number of the group. (For example: Dial "**01" to pick up the call to Group 1.)

2 Call Pickup Target ..... Set the incoming call type that the group can pick up.
(Default: Extension Only)

- Options: External Call/Extension, External Call Only, or Extension Only

3 Group Pickup Target..... Set the incoming call type that you can pick up, that arrives at an extension in the same Group. (Default: External Call/Extension)

- Options: External Call/Extension, External Call Only, or Extension Only

4 Directed Call Pickup Target Set the type of directed call that you can pick up
(Default: External Call/Extension)

- Options: External Call/Extension, External Call Only, or Extension Only

5 Call Restriction ..... Select whether or not to restrict making an external call.
(Default: Disable)

- **Disable**: You can make external calls.
- **Call Restriction Rule 1 ~ 16**: Restricts external calls according to the rules. The rules can be set in "Outbound Call Restriction Rule Settings." (PBX Advanced Settings > Numbering Plan > Outbound Call Restriction Rule Settings)
- **External Call Restriction**: You cannot make any external calls but you can make internal calls (including Peer to Peer calls.)

Telephone (KX-UT Series) screen

PBX Extension > Telephone (KX-UT Series)

■ Telephone Individual Settings (KX-UT Series) Group 1 ~ 30

Sets the rules for the incoming calls, and so on, to each Extension group.

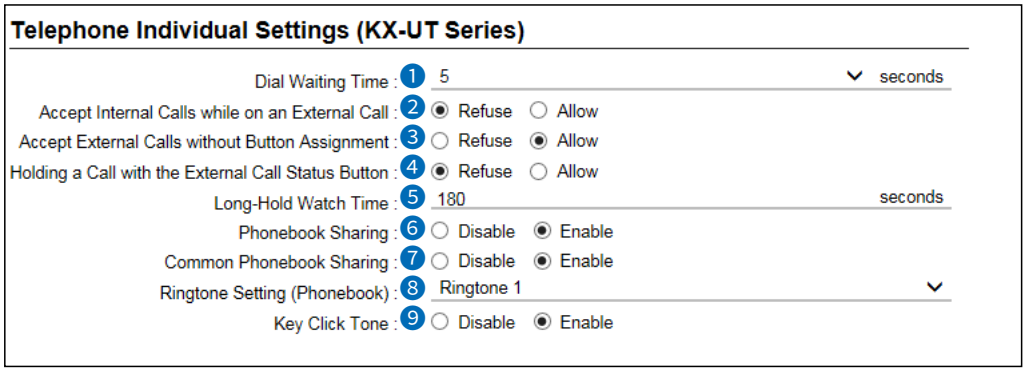

1 Dial Waiting Time ..... The waiting time to start dialing after you finished dialing. (Default: 5)

- Range: 1 ~ 15 (seconds)

2 Accept Internal Calls while on an External Call ..... Set whether or not to accept an incoming extension call (including a Peer to Peer call) while you are talking on an external call. (Default: Refuse)

ⓘ When setting to “Refuse,” the busy tone will be returned to an incoming extension call.

3 Accept External Calls without Button Assignment Set whether or not to accept an inbound call to a <DN key> button when an <External Call Status> button is not assigned or all <External Call Status> buttons are busy. (Default: Allow)

- **Allow**: Accepts an inbound call to a <DN key> button.
- **Refuse**: Rejects an inbound call and returns the busy tone.

4 Holding a Call with the External Call Status Button When selecting “Allow,” you can hold an external call using an <External Call Status> button. (Default: Refuse)

5 Long-Hold Watch Time..... Sounds an alert if you hold a call for time longer than the set period of time. (Default: 180)

- Range: 30 ~ 240 (seconds)

Telephone (KX-UT Series) screen

PBX Extension > Telephone (KX-UT Series)

■ Telephone Individual Settings (KX-UT Series)

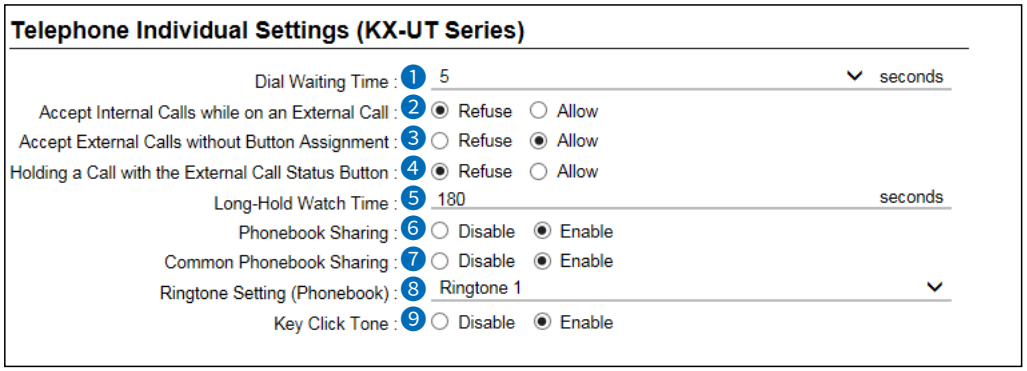

6 Phonebook Sharing ..... Set whether or not to download the Phonebook data from the RoIP gateway at every boot up of a KX series telephone.
You can download up to 300 entries to the common phonebook and up to 100 entries to the Group phonebook. (Default: Enable)

7 Common Phonebook Sharing Displayed only when “Phonebook Sharing” (6) is enabled.
Set whether or not to download the Common Phonebook data from the RoIP gateway at every boot up of KX series telephones.
(Default: Enable)

8 Ringtone Setting (Phonebook) Select a ringtone from the Ringtone 1 ~ 32.
(Default: Ringtone 1)

9 Key Click Tone ..... Set whether or not to sound a tone when you push a key of a KX series telephone. (Default: Enable)

Telephone (KX-UT Series) screen

PBX Extension > Telephone (KX-UT Series)

■ Button Assignment

Sets the functions of the flexible buttons on the telephone.

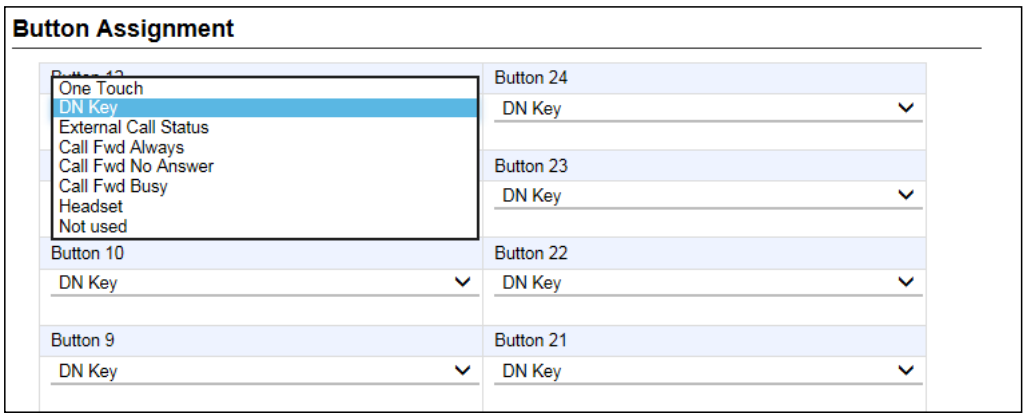

Button Assignments 1 ~ 24 … Assign a key function to each Flexible button. (Default: DN Key)

• **One Touch:**
Used as an alias to a favorite number.
You can assign a frequently used telephone number, a special number, prefix, and so on.

ⓘ You can enter an external phone number with a prefix to use a special number for a Transceiver Individual Call.



• **DN key: (Directory Number)**
Checks the line assigned to the DN button. When a call arrives on the DN button, pressing the button answers the call.
Be sure to assign 2 or more DN keys.

The indicator status
- Quickly blinks green: An external or an extension call has arrived
- Slowly blinks green: Holding on your terminal
- Lights green: The line is in use on your terminal

ⓘ The shared line is assigned to the order of the DN key button number.
ⓘ The number of sharable lines is the total number of DN keys. Also, it depends on the setting on the “External Call Limiting” screen.
(PBX Advanced Settings > External Call Limiting)

NOTE: At least two DN keys are required, the one for incoming or talking, the other one for holding or keeping a call. Be sure to assign enough DN keys to manage the shared lines.

Telephone (KX-UT Series) screen

PBX Extension > Telephone (KX-UT Series)

■ Button Assignment

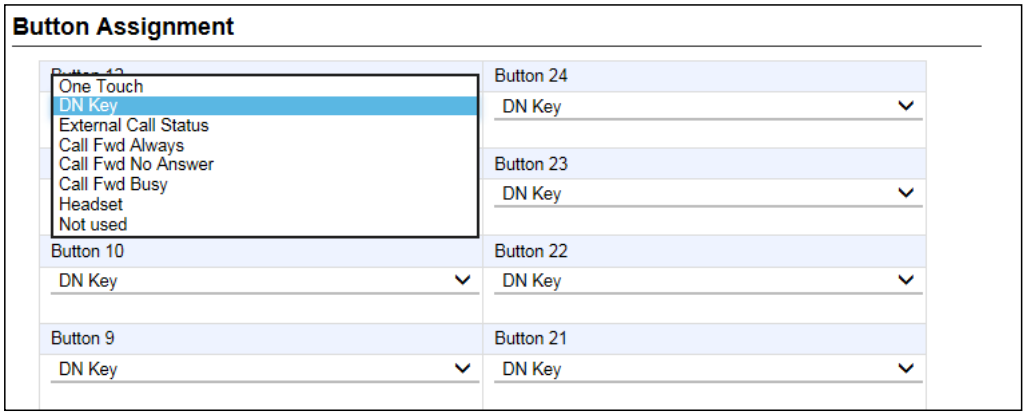

Button Assignments 1 ~ 24 (Continued)

• **External Call Status**

Checks the assigned External line (IP line) status. When a call arrives on the External Call Status button, pressing the button answers the call.



The indicator status

- Blinks red: An External Call is incoming or held
- Lights red: The line is in use on another terminal
- Lights green: The line is in use on your terminal

ⓘ Assign the same number of External Call Status buttons as the channels you are allowed.

Telephone (KX-UT Series) screen

PBX Extension > Telephone (KX-UT Series)

■ Button Assignment

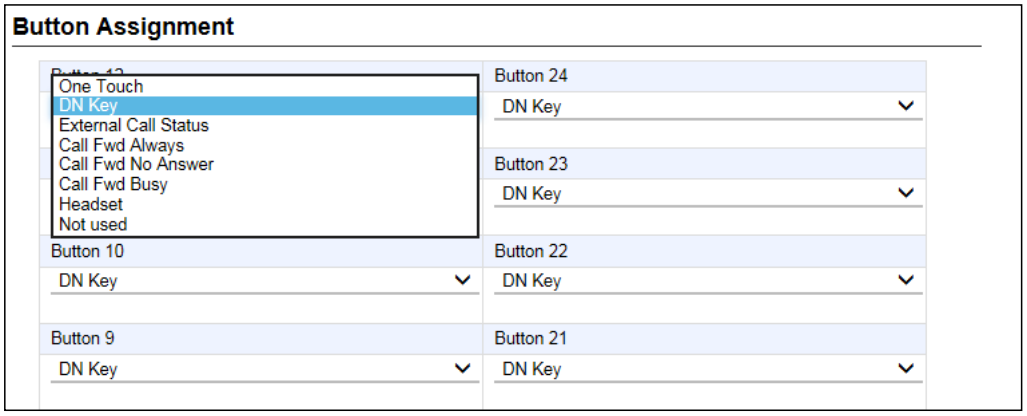

Button Assignments 1 ~ 24 (Continued)

• **Call Fwd Always**

Forwards incoming calls to the specified extension while the indicator on this key lights red. Enter the extension number (with a special number, if required) of the forwarding destination.
Push the button to start or stop forwarding.

The indicator status

- Lights red: Forwards calls
- Not lit: Does not forward calls

ⓘ You can also start or stop forwarding by dialing the special number for “Call Forward Always” (Default: *94) and the extension number of the forwarding destination.
(PBX > Special Number > Telephone Special Number > Call Forward Always)

• **Call Fwd No Answer**

Forwards an incoming call to the specified extension when you don’t answer the call for a certain period of time, such as when you are busy on another call.
Enter the extension number (with a special number, if required) of the forwarding destination.
Push the button to start or stop forwarding.

The indicator status

- Lights red: Forwards calls
- Not lit: Does not forward calls

ⓘ You can also start or stop forwarding by dialing the special number for “Call Forward No Answer” (Default: *95) and the extension number of the forwarding destination.
(PBX > Special Number > Telephone Special Number > Call Forward No Answer)

Telephone (KX-UT Series) screen

PBX Extension > Telephone (KX-UT Series)

■ Button Assignment

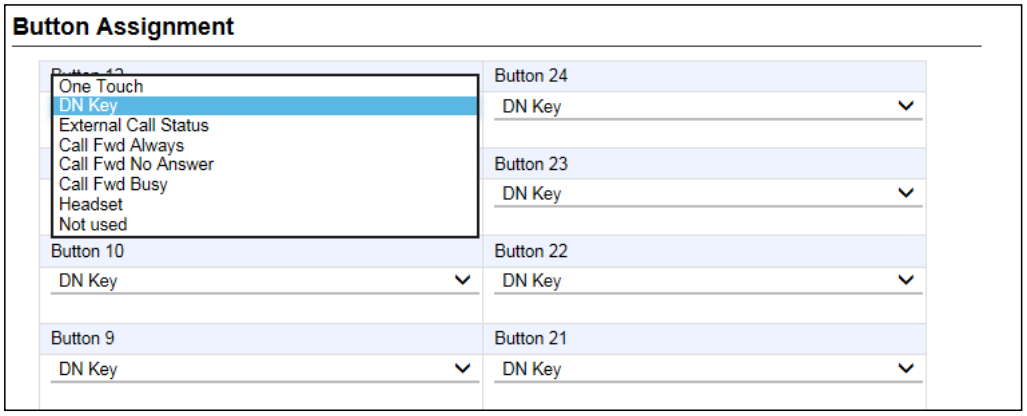

Button Assignments 1 ~ 24 (Continued)

• **Call Fwd Busy**

Forwards an incoming call to the specified extension when you are busy on another call.
Enter the extension number (with a special number, if required) of the forwarding destination.
Push the button to start or stop forwarding.

The indicator status

- Lights red: Forwards calls
- Not lit: Does not forward calls

ⓘ You can also start or stop forwarding by dialing the special number of “Call Forward Busy” (Default: *96) and the extension number of forwarding destination.
(PBX > Special Number > Telephone Special Number > Call Forward Busy)

• **Headset**

Assign to talk using a headset if it is connected to the KX series telephone. The indicator lights red while the headset is in use.

• **Not used**

Does not assign any function.

Telephone (KX-HDV Series) screen

PBX Extension > Telephone (KX-HDV Series)

■ Telephone Maintenance

Assigns a Group to each extension number.
The settings for each extension detail can be edited in “List of Extension Entries” (PBX > Extension > List of Extension Entries).

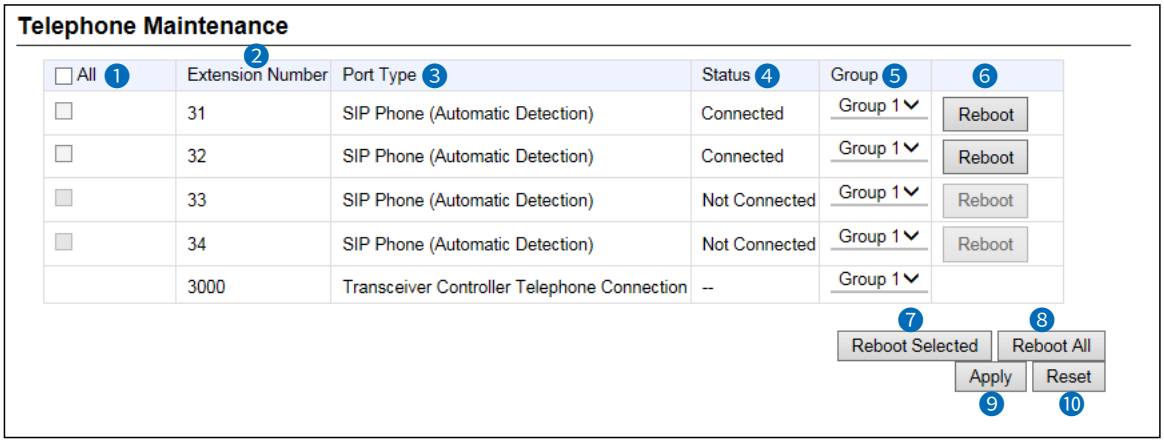

1 Check Box ..... Click to select the extensions if you want to reboot one or more KX series telephones. Click “All” to select all the entries.
ⓘ The extensions where Status (4) is “Not Connected” cannot be selected.

2 Extension Number..... Displays the extension number.

3 Port Type ..... Displays the port type of the telephone.

4 Status ..... Displays the connection status of the telephone.
ⓘ “Not Connected” is displayed for the telephone that is not registered to the SIP server of this RoIP gateway.
ⓘ “—” is displayed for the Converter bridge or the Transceiver Controller Telephone Connection.

5 Group ..... Set the setting Group of the extension.
You can customize the flexible function button assignments for each Group. (Default: Group 1)
• Range: Group 1 ~ 30

Telephone (KX-HDV Series) screen

PBX Extension > Telephone (KX-HDV Series)

■ Telephone Maintenance

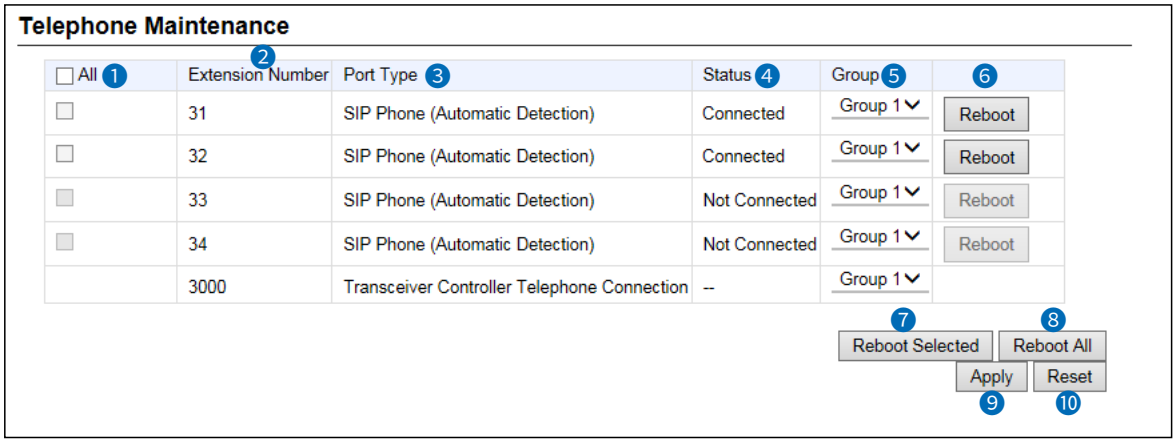

6 <Reboot> ..... Click to reboot the KX series telephone.

7 <Reboot Selected> ..... Click to reboot the selected (with check marks) KX series telephones.

8 <Reboot All> ..... Click to reboot all the KX series telephones whose Status (4) is "Connected" in the list.

9 <Apply> ..... Click to apply the entries.

10 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Telephone (KX-HDV Series) screen

PBX Extension > Telephone (KX-HDV Series)

■ Telephone Group

Edits the Group setting of the entered extension (telephone.)



Select Group Setting ..... Select the setting mode, and then click <Edit>.
- The setting screen for the selected Group is displayed.

- **Common Setting**
  Common settings for the KX-HDV Series that are connected to the RoIP gateway, such as the tone patterns or volume levels.

- **Group 1 ~ Group 30**
  The custom settings for the KX-HDV Series in the selected Group that are connected to the RoIP gateway, such as the flexible button assignments.

Telephone (KX-HDV Series) screen

PBX Extension > Telephone (KX-HDV Series)

■ Dial Tone Common Setting

Sets the tone when off-hook.

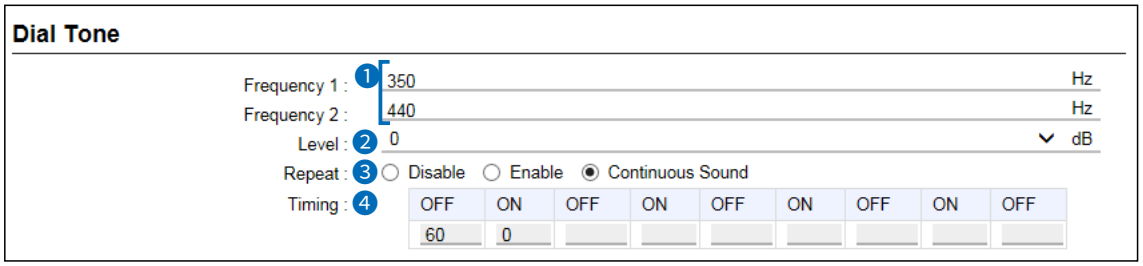

❶ Frequency 1/2 ..... Set the tone frequencies of the Dial tone.
(Default: Frequency 1: 350 / Frequency 2: 440)
- Range: 0 (inaudible), 200 ~ 2000 (Hz)

ⓘ The 350 Hz and 440 Hz tones simultaneously sound at default.

❷ Level ..... Set the audio level of the Dial tone. (Default: 0)
- Range: –24 (minimum) ~ +6 (maximum) (dB)

❸ Repeat ..... Set whether or not to repeat the set tone pattern.
(Default: Continuous Sound)
- **Disable**: Sounds the set pattern in Timing (❹) only once
- **Enable**: Continuously repeats the set pattern in Timing (❹)
- **Continuous Sound**: Continuously sounds frequencies 1 and 2

❹ Timing ..... Set the pattern of tone rings and mutes using up to 9 values. The tone sounds for the set period of time in the ON settings, and mutes for the set period of time in the OFF settings.
(Default: 60, 0)
- Range of the first “OFF”: 60 ~ 16000 (milliseconds)
- Range of the others: 51 ~ 16000 (milliseconds)

Telephone (KX-HDV Series) screen

PBX Extension > Telephone (KX-HDV Series)

■ Busy Tone Common Setting

Sets the tone when the line is busy.

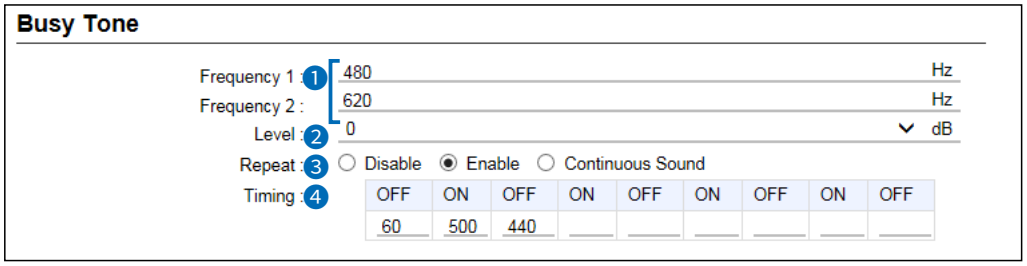

❶ Frequency 1/2 ..... Set the tone frequencies of the Busy tone.
(Default: Frequency 1: 480 / Frequency 2: 620)

- Range: 0 (inaudible), 200 ~ 2000 (Hz)

ⓘ The 480 Hz and 620 Hz tones simultaneously sound at default.

❷ Level ..... Set the audio level of the Busy tone. (Default: 0)

- Range: –24 (minimum) ~ +6 (maximum) (dB)

❸ Repeat ..... Set whether or not to repeat the set tone pattern.
(Default: Enable)

- **Disable**: Sounds the set pattern in Timing (❹) only once
- **Enable**: Continuously repeats the set pattern in Timing (❹)
- **Continuous Sound**: Continuously sounds frequencies 1 and 2

❹ Timing ..... Set the pattern of tone rings and mutes using up to 9 values. The tone sounds for the set period of time in the ON settings, and mutes for the set period of time in the OFF settings.
(Default: 60, 500, 440)

- Range of the first “OFF”: 60 ~ 16000 (milliseconds)
- Range of the others: 51 ~ 16000 (milliseconds)

Telephone (KX-HDV Series) screen

PBX Extension > Telephone (KX-HDV Series)

■ Reorder Tone Common Setting

Sets the Reorder tone.

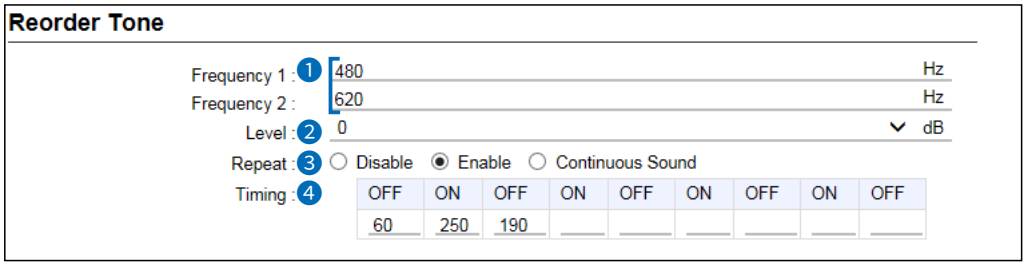

1 Frequency 1/2 ..... Set the tone frequencies of the Reorder tone.
(Default: Frequency 1: 480 / Frequency 2: 620)

- Range: 0 (inaudible), 200 ~ 2000 (Hz)

ⓘ The 480 Hz and 620 Hz tones simultaneously sound at default.

2 Level ..... Set the audio level of the Reorder tone. (Default: 0)

- Range: –24 (minimum) ~ +6 (maximum) (dB)

3 Repeat ..... Set whether or not to repeat the set tone pattern.
(Default: Enable)

- **Disable**: Sounds the set pattern in Timing (4) only once
- **Enable**: Continuously repeats the set pattern in Timing (4)
- **Continuous Sound**: Continuously sounds frequencies 1 and 2

4 Timing ..... Set the pattern of tone rings and mutes using up to 9 values. The tone sounds for the set period of time in the ON settings, and mutes for the set period of time in the OFF settings.
(Default: 60, 250, 190)

- Range of the first “OFF”: 60 ~ 16000 (milliseconds)
- Range of the others: 51 ~ 16000 (milliseconds)

Telephone (KX-HDV Series) screen

PBX Extension > Telephone (KX-HDV Series)

■ Ring Back Tone Common Setting

Sets the Ring Back tone.

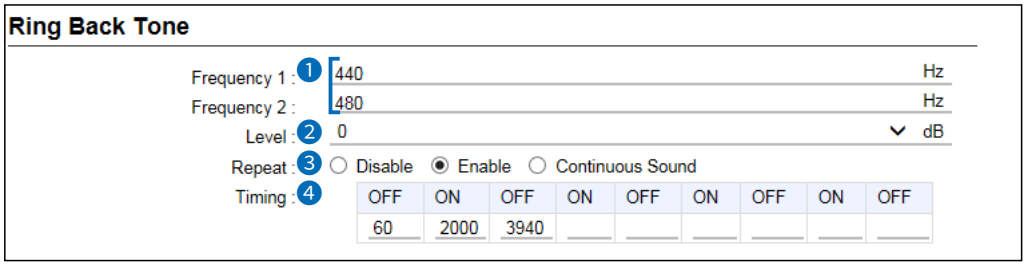

1 Frequency 1/2 ..... Set the tone frequencies of the Ring Back tone.
(Default: Frequency 1: 440 / Frequency 2: 480)
- Range: 0 (inaudible), 200 ~ 2000 (Hz)

ⓘ The 440 Hz and 480 Hz tones simultaneously sound at default.

2 Level ..... Set the audio level of the Ring Back tone. (Default: 0)
- Range: –24 (minimum) ~ +6 (maximum) (dB)

3 Repeat ..... Set whether or not to repeat the set tone pattern. (Default: Enable)
- **Disable**: Sounds the set pattern in Timing (4) only once
- **Enable**: Continuously repeats the set pattern in Timing (4)
- **Continuous Sound**: Continuously sounds frequencies 1 and 2

4 Timing ..... Set the pattern of tone rings and mutes using up to 9 values. The tone sounds for the set period of time in the ON settings, and mutes for the set period of time in the OFF settings. (Default: 60, 2000, 3940)
- Range of the first “OFF”: 60 ~ 16000 (milliseconds)
- Range of the others: 51 ~ 16000 (milliseconds)

Telephone (KX-HDV Series) screen

PBX Extension > Telephone (KX-HDV Series)

■ Hold Alarm Common Setting

Sets the Hold alarm tone that sounds to alert you a second call has been held for certain period of time.

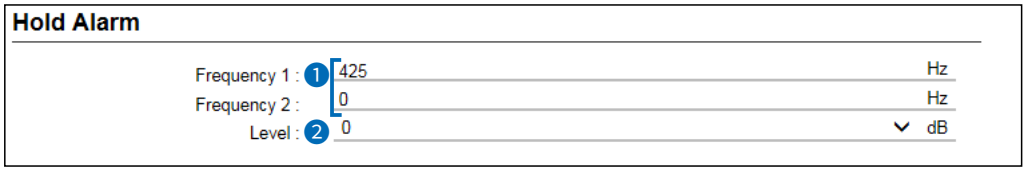

❶ Frequency 1/2 ..... Set the tone frequencies of the Hold alarm.
(Default: Frequency 1: 425 / Frequency 2: 0)
• Range: 0 (inaudible), 200 ~ 2000 (Hz)

❷ Level ..... Set the audio level of the Hold alarm. (Default: 0)
• Range: –24 (minimum) ~ +6 (maximum) (dB)

Telephone (KX-HDV Series) screen

PBX Extension > Telephone (KX-HDV Series)

■ Ringtone Pattern Common Setting

Sets the Ringtone patterns. The Ringtone patterns can be assigned to the

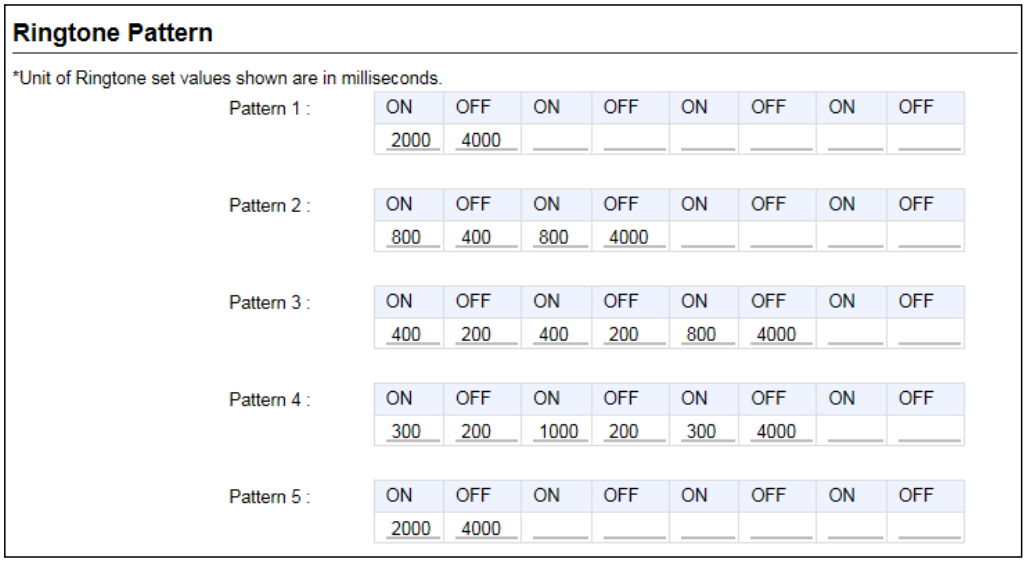

Pattern 1 ~ 5..... Set the pattern of tone rings and mutes using up to 8 values. The tone sounds for the set period of time in the ON settings, and mutes for the set period of time in the OFF settings.

❍ The default values of Ringtone Patterns

Pattern	ON	OFF	ON	OFF	ON	OFF	ON	OFF
Pattern 1	2000	4000	–	–	–	–	–	–
Pattern 2	800	400	800	4000	–	–	–	–
Pattern 3	400	200	400	200	800	4000	–	–
Pattern 4	300	200	1000	200	300	4000	–	–
Pattern 5	2000	4000	–	–	–	–	–	–

• Range : 51 ~ 5000 (milliseconds)
ⓘ A ring pattern must end with OFF.
ⓘ The ring patterns can be assigned, according to the incoming call type. See the next item for details.

Telephone (KX-HDV Series) screen

PBX Extension > Telephone (KX-HDV Series)

■ Ringtone Pattern Assignment Common Setting

Assigns the Ringtone pattern of each incoming call group.

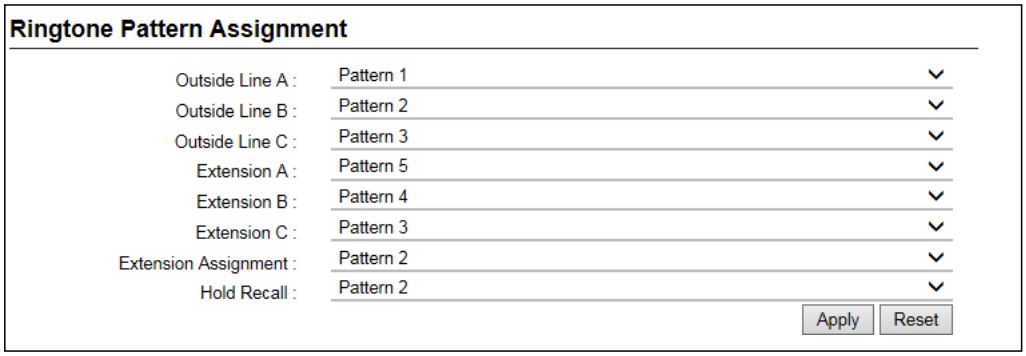

Assign a Ringtone pattern for each incoming call type according to the setting on the Inbound Call screen. (PBX > Inbound Call)

ⓘ Information

- The incoming call group depends on the notified number of incoming calls.
- The calls from the phone numbers that are entered into extensions A to C are treated as internal calls.
- For an internal call from other than the entered extensions on the Inbound Call screen, the Ringtone pattern set in the “Extension Assignment” sounds.
- When recalling to a parked telephone, the Ringtone set in the “Hold Recall” sounds.

Telephone (KX-HDV Series) screen

PBX Extension > Telephone (KX-HDV Series)

■ Telephone Common Settings Group 1 ~ 30

Sets the rules for incoming calls for each Extension Group.

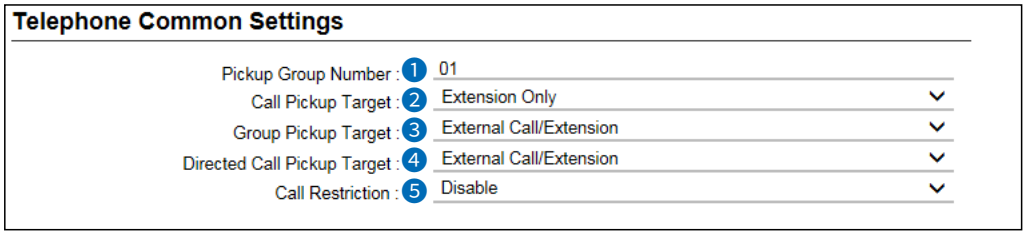

1 Pickup Group Number ..... Enter a pickup group number of up to 7 digits.
(Default: 01 (for the Group1))

ⓘ You can pick up an incoming call of another group extension by dialing the Special Number for the Group Pickup and the Group Number of the group. (For example: Dial "**01" to pick up the call to Group 1.)

2 Call Pickup Target ..... Set the incoming call type that the group can pick up.
(Default: Extension Only)

- Options: Extension Only, External Call Only, or External Call/Extension

3 Group Pickup Target..... Set the incoming call type that you can pick up, that arrives at an extension in the same Group. (Default: External Call/Extension)

- Options: Extension Only, External Call Only, or External Call/Extension

4 Directed Call Pickup Target Set the type of directed call that you can pick up, that arrives at an extension in the same Group. (Default: External Call/Extension)

- Options: Extension Only, External Call Only, or External Call/Extension

5 Call Restriction ..... Select whether or not to restrict making an external call.
(Default: Disable)

- **Disable**: You can make external calls.
- **Call Restriction Rule 1 ~ 16**: Restricts external calls according to the rules. The rules can be set in "Outbound Call Restriction Rule Settings." (PBX Advanced Settings > Numbering Plan > Outbound Call Restriction Rule Settings)
- **External Call Restriction**: You cannot make any external calls but you can make internal calls (including Peer to Peer calls.)

Telephone (KX-HDV Series) screen

PBX Extension > Telephone (KX-HDV Series)

■ Telephone Individual Settings (KX-HDV Series) Group 1 ~ 30

Sets the rules for the incoming calls, and so on, to each Extension group.

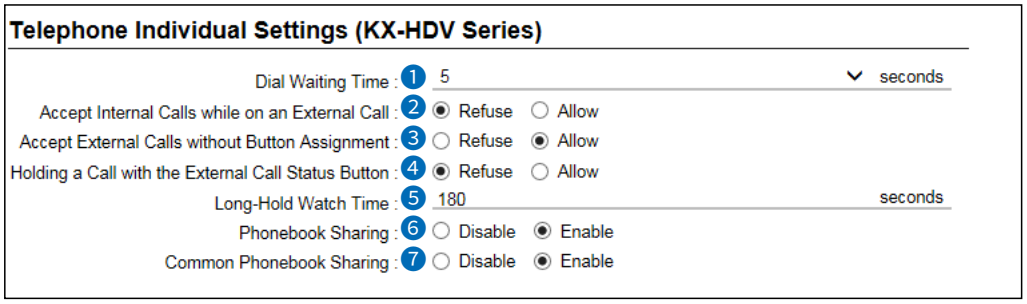

1 Dial Waiting Time ……

The waiting time to start dialing after you finished dialing. (Default: 5)

- Range: 1 ~ 15 (seconds)

2 Accept Internal Calls while on an External Call ……

Set whether or not to accept an incoming extension call (including a Peer to Peer call) while you are talking on an external call.

(Default: Refuse)

ⓘ When setting to “Refuse,” the busy tone will be returned to an incoming extension call.

3 Accept External Calls without Button Assignment

Set whether or not to accept an inbound call to a <DN key> or <Not Used> button when an <External Call Status> button is not assigned or all <External Call Status> buttons are busy. (Default: Allow)

- **Allow**: Accepts an inbound call to a <DN key> or a <Not used> button.
- **Refuse**: Rejects an inbound call and returns the busy tone.

4 Holding a Call with the External Call Status Button

When selecting “Allow,” you can hold an external call using an <External Call Status> button. (Default: Refuse)

5 Long-Hold Watch Time……

Sounds an alert if you hold a call for time longer than the set period of time. (Default: 180)

- Range: 30 ~ 240 (seconds)

Telephone (KX-HDV Series) screen

PBX Extension > Telephone (KX-HDV Series)

■ Telephone Individual Settings (KX-HDV Series)

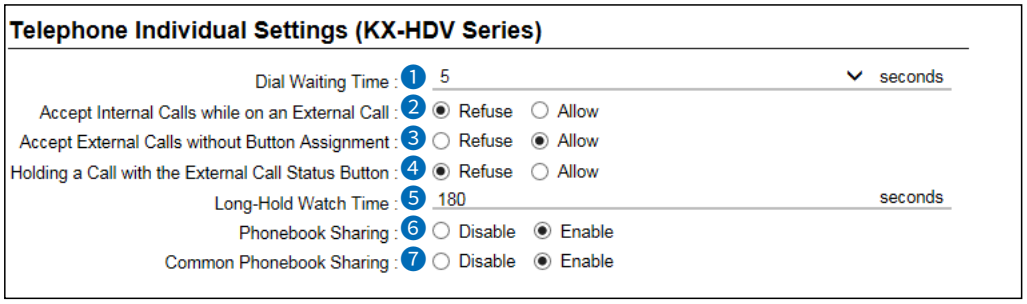

6 Phonebook Sharing ..... Set whether or not to download the Phonebook data from the RoIP gateway at every boot up of a KX series telephone.
You can download up to 300 entries to the common phonebook and up to 100 entries to the Group phonebook. (Default: Enable)

ⓘ If disabling this setting, the phonebook is not downloaded even if the SIP phone is booted up.

7 Common Phonebook Sharing Displayed only when “Phonebook Sharing” (6) is enabled.
Set whether or not to download the Common Phonebook data from the RoIP gateway at every boot up of KX series telephones.
(Default: Enable)

Telephone (KX-HDV Series) screen

PBX Extension > Telephone (KX-HDV Series)

■ Telephone Individual Settings (KX-HDV Series)

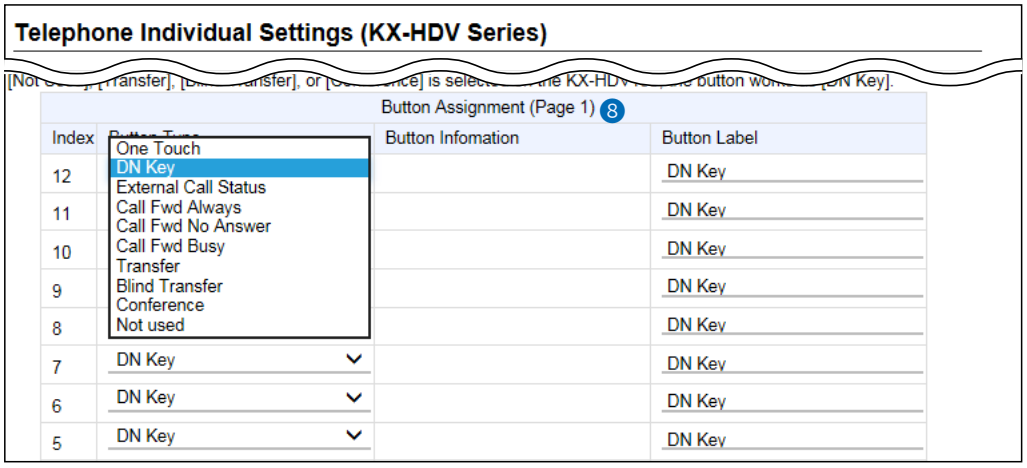

8 Button Assignment 1 ~ 24 Assign a key function to each Flexible button. (Default: DN Key)

- **One Touch:**
  Used as an alias to a favorite number.
  You can assign a frequently used telephone number, a special number, prefix, and so on.
  The entered Button Lavel will be displayed on the KX-HDV series telephone.
  ⓘ You can enter an external phone number with a prefix to use a special number for an external call.



Telephone (KX-HDV Series) screen

PBX Extension > Telephone (KX-HDV Series)

■ Telephone Individual Settings (KX-HDV Series)

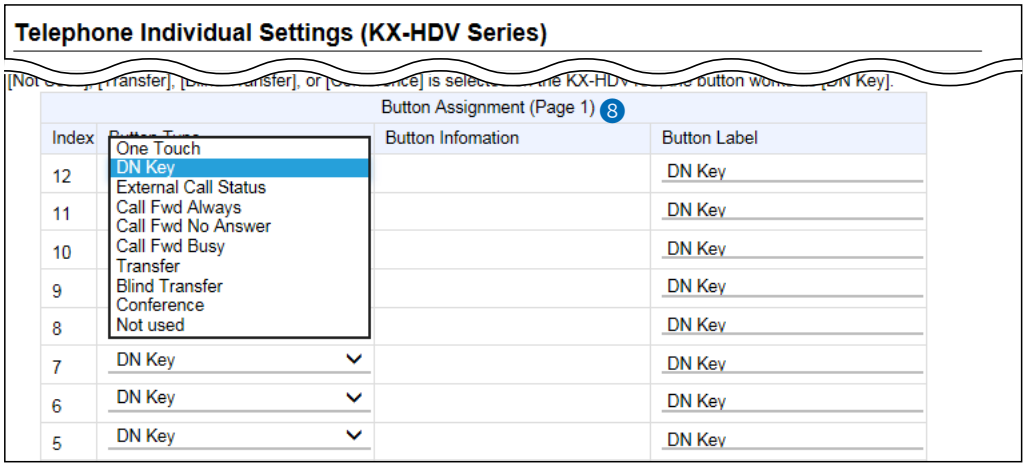

8 Button Assignment 1 ~ 24 (Continued)

- **DN Key: (Directory Number)**
  Checks the line assigned to the DN button. When a call arrives on the DN button, pressing the button answers the call.
  Be sure to assign 2 or more DN keys.

  The indicator status
  - Quickly blinks blue: An external or an extension call has arrived
  - Slowly blinks blue: Holding on your terminal
  - Lights blue: The line is in use on your terminal

  ⓘ The shared line is assigned to the order of the DN key button number.
  ⓘ The number of sharable lines is the total number of DN keys. Also it depends on the setting on the “External Call Limiting” screen. (PBX Advanced Settings > External Call Limiting)

NOTE: At least two DN keys are required, the one for incoming or talking, the other one for holding or keeping a call. Be sure to assign enough DN keys to manage the shared lines.

- **External Call Status**
  Checks the assigned External line (IP line) status. When a call arrives on the External Call Status button, pressing the button answers the call.



  The indicator status
  - Blinks red: An External Call is incoming or held
  - Lights red: The line is in use

ⓘ Assign the same number of External Call Status buttons as the channels you are allowed.

Telephone (KX-HDV Series) screen

PBX Extension > Telephone (KX-HDV Series)

■ Telephone Individual Settings (KX-HDV Series)

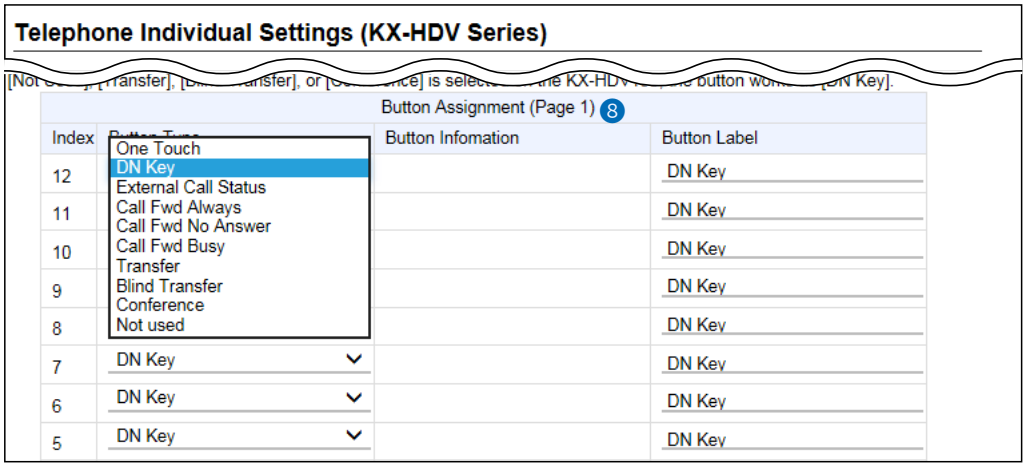

8 Button Assignment 1 ~ 24 (Continued)

- **Call Fwd Always**

  Forwards incoming calls to the specified extension while the indicator on this key lights red. Enter the extension number (with a special number, if required) of the forwarding destination.
  Push the button to start or stop forwarding.

  The indicator status
  - Lights red: Forwards calls
  - Not lit: Does not forward calls

ⓘ You can also start or stop forwarding by dialing the special number for “Call Forward Always” (Default: *94) and the extension number of the forwarding destination.
(PBX > Special Number > Telephone Special Number > Call Forward Always)

- **Call Fwd No Answer**

  Forwards an incoming call to the specified extension when you don’t answer the call for a certain period of time, such as when you are busy on another call.
  Enter the extension number (with a special number, if required) of the forwarding destination.
  Push the button to start or stop forwarding.

  The indicator status
  - Lights red: Forwards calls
  - Not lit: Does not forward calls

ⓘ You can also start or stop forwarding by dialing the special number for “Call Forward No Answer” (Default: *95) and the extension number of the forwarding destination.
(PBX > Special Number > Telephone Special Number > Call Forward No Answer)

Telephone (KX-HDV Series) screen

PBX Extension > Telephone (KX-HDV Series)

■ Telephone Individual Settings (KX-HDV Series)

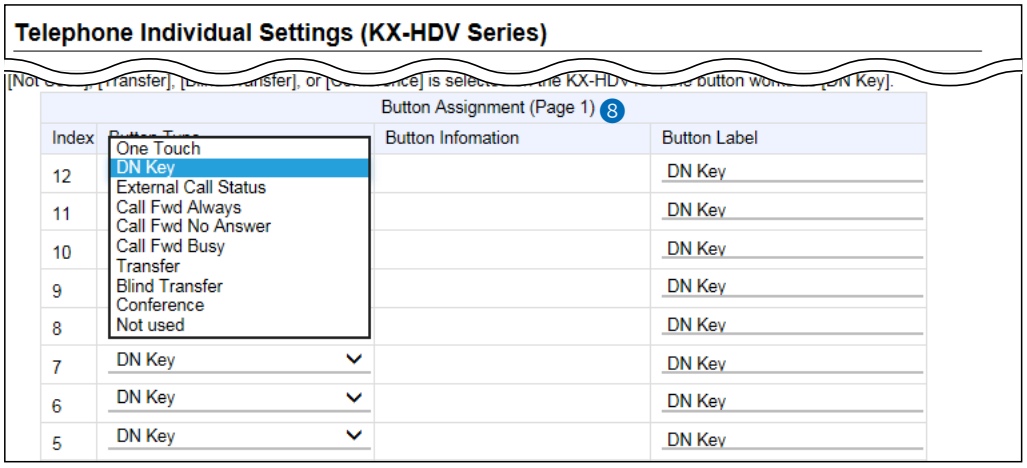

8 Button Assignment 1 ~ 24 (Continued)

- **Call Fwd Busy**
  Forwards an incoming call to the specified extension when you are busy on another call.
  Enter the extension number (with a special number, if required) of the forwarding destination.
  Push the button to start or stop forwarding.

  The indicator status
  - Lights red: Forwards calls
  - Not lit: Does not forward calls

ⓘ You can also start or stop forwarding by dialing the special number of “Call Forward Busy” (Default: *96) and the extension number of forwarding destination.
(PBX > Special Number > Telephone Special Number > Call Forward Busy)

Telephone (KX-HDV Series) screen

PBX Extension > Telephone (KX-HDV Series)

■ Telephone Individual Settings (KX-HDV Series)

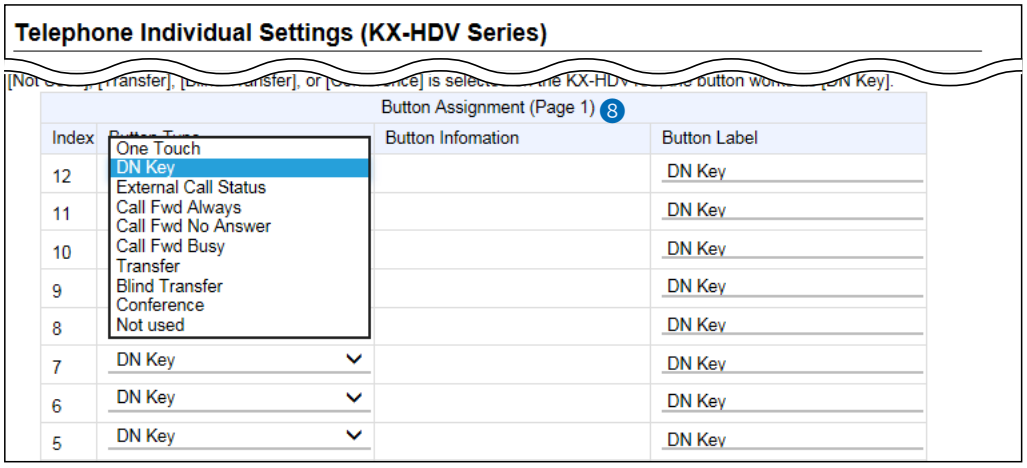

8 Button Assignment 1 ~ 24 (Continued)

- **Transfer**
  Holds and forwards a call to the specified extension. After the forwarding destination answers, push [OK] or hang up to transfer a call.

- **Blind Transfer**
  Holds and immediately forwards a call to the specified extension.
  Enter the extension number of the destination and hang up the telephone.

- **Conference**
  Holds a call and makes a conference call to the specified extension.
  Enter the extension number of the destination.
  After the destination answers, push the <CONF> button to start the conference call.

- **Not used**
  Does not assign any function.

Expand Unit (KX-HDV230) Expand Unit 1 ~ 5 screen

PBX Extension > Expand Unit (KX-HDV230) Expand Unit 1 ~ 5

■ Telephone Maintenance

Enters the common phonebook or the phonebook that is shared in the particular Group for the KX series SIP phones. The settings of each extension details can be edited in “List of Extension Entries” (PBX > Extension > List of Extension Entries).

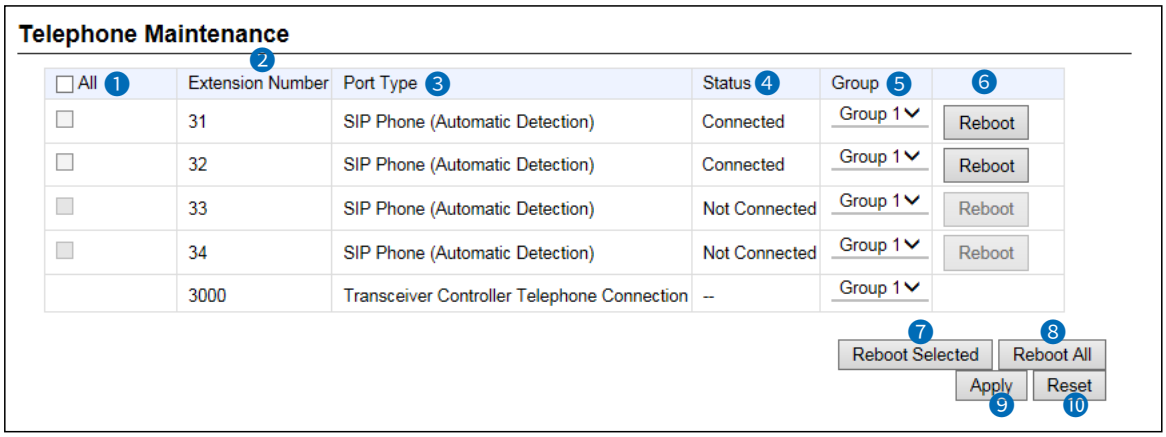

1 Check Box ..... Click to select the extensions if you want to reboot one or more KX series telephones. Click “All” to select all the entries.
ⓘ The extensions where Status (4) is “Not Connected” cannot be selected.

2 Extension Number..... Displays the extension number.

3 Port Type ..... Displays the port type of the telephone.

4 Status ..... Displays the connection status of the telephone.
ⓘ “Not Connected” is displayed for the telephone that is not registered to the SIP server of this RoIP gateway.
ⓘ “– –” is displayed for the Converter Bridge or the Transceiver Controller Telephone Connection.

5 Group ..... Set the line Group of the extension.
You can customize the flexible function button assignments for each Group. Assign the same Group if you want to use the button functions from other telephones by dialing the special number and button number.
(For example: When picking up a parked telephone call)
• Range: Group 1 ~ 30

Expand Unit (KX-HDV230) Expand Unit 1 ~ 5 screen

PBX Extension > Expand Unit (KX-HDV230) Expand Unit 1 ~ 5

■ Telephone Maintenance

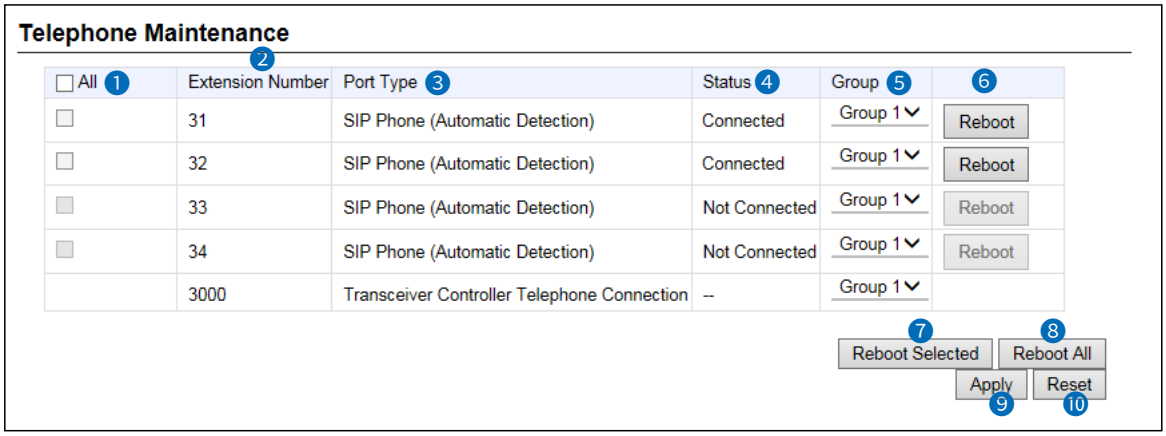

6 <Reboot> ..... Click to reboot the KX series telephone.

7 <Reboot Selected> ..... Click to reboot the selected (with check marks) KX series telephones.

8 <Reboot All> ..... Click to reboot all the KX series telephones whose Status (4) is "Connected" in the list.

9 <Apply> ..... Click to apply the entries.

10 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Expand Unit (KX-HDV230) Expand Unit 1 ~ 5 screen

PBX Extension > Expand Unit (KX-HDV230) Expand Unit 1 ~ 5

■ Telephone Group

Edits the Group setting of the entered extension (telephone)

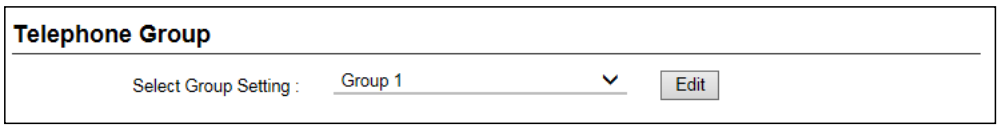

Select Group Setting…… Select a Group from Group 1 to Group 30 that you want to edit, and then click <Edit> to enter the edit mode.

Expand Unit (KX-HDV230) Expand Unit 1 ~ 5 screen

PBX Extension > Expand Unit (KX-HDV230) Expand Unit 1 ~ 5

■ Telephone Individual Settings (KX-HDV230)

Assigns the function to each flexible button on the expand units 1 to 5.

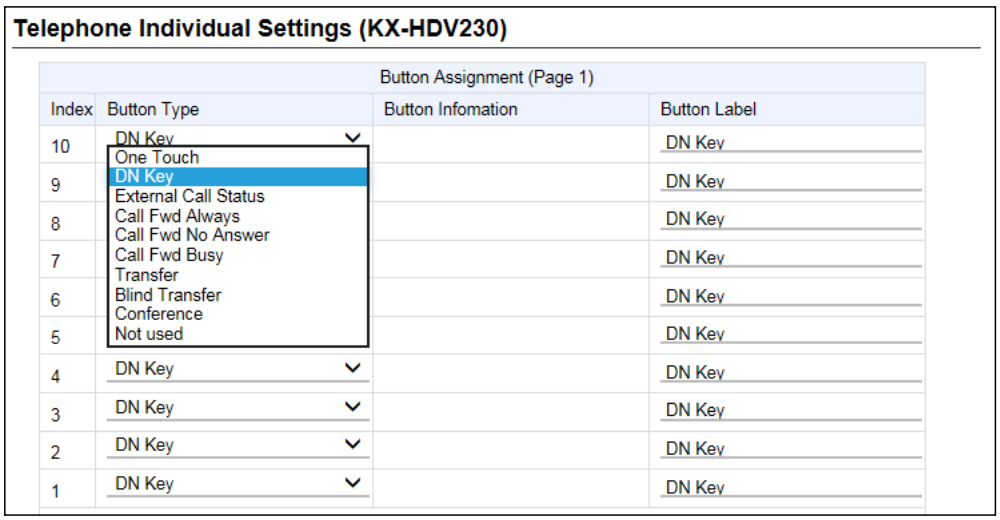

Button Assignment .....

Expand Unit 1 (1 ~ 40)
Expand Unit 2 (41 ~ 80)
Expand Unit 3 (81 ~ 120)
Expand Unit 4 (121 ~ 160)
Expand Unit 5 (161 ~ 200)

Assign a button function to each flexible button.
The Assignable functions:

- **One Touch**
- **DN Key (Directory Number)***
- **External Call Status***
- **Call Fwd Always***
- **Call Fwd No Answer***
- **Call Fwd Busy***
- **Transfer**
- **Blind Transfer**
- **Conference**
- **Not used**

* Assignable only to Expand unit 1 (Button 1 ~ 40)

ⓘ Refer to the “Button Assignment” on pages 13-33 ~13-37 for details on each button function.

Phonebook screen

PBX Extension > Phonebook

■ Select Group Setting

Edits the phonebook to the Common phonebook and the Group phonebooks.

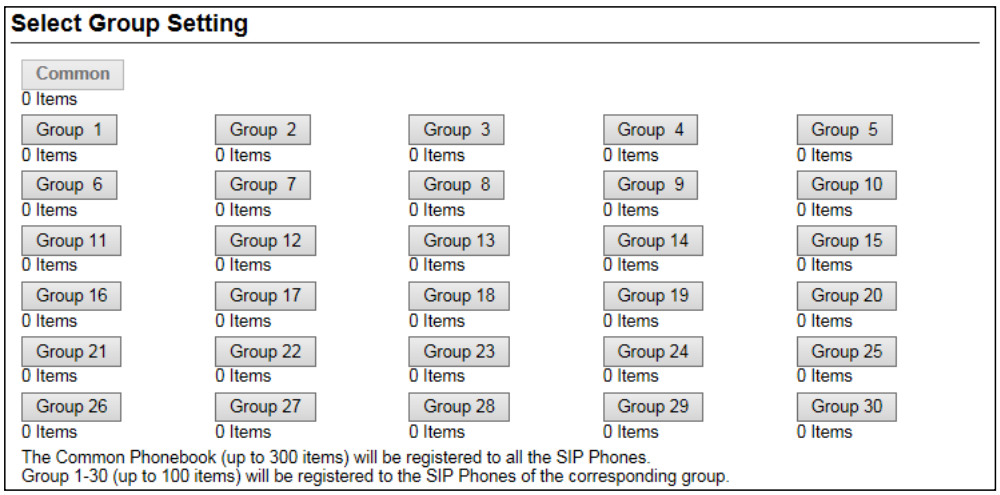

Select Group Setting……

Click the button that you want to edit its phonebook.

ⓘ The entries in the selected phonebook are displayed in the “List of Phonebook Entries” below on the screen. (See page 13-47.)

ⓘ The number of entries is displayed below the Group buttons.

ⓘ You can edit the Group setting in “Telephone Maintenance.”
(PBX Extension > Telephone (KX-UT Series) > Telephone Maintenance)
(PBX Extension > Telephone (KX-HDV Series) > Telephone Maintenance)

Phonebook screen

PBX Extension > Phonebook

■ Save or Write the Phonebook

You can save or load the selected phonebook to or from a CSV format file.

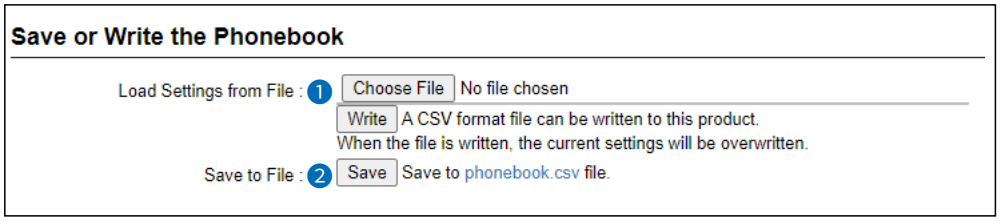

❶Load Settings from File … You can load the saved phonebook from a CSV format file.
Click <Choose File> and select the setting file (phonebook.csv) from the displayed list, and then click <Open>.
Confirm the correct file is selected, and then click <Write> to load the phonebook from the selected file.

ⓘ Note that the phonebook settings will be overwritten when the phonebook is loaded.
ⓘ The setting backup file on the “Settings Backup/Restore” includes the phonebook data. If the setting file is loaded on the ”Settings Backup/Restore” screen (Management > Settings Backup/Restore > Settings Restore), the phonebook settings will be overwritten.
ⓘ A file that is saved by other than the following procedures may not work properly:
- Saved file using the <Save> (❷) button.
- A CSV file in the same format as described on the next page.

❷Save to File …… Saves the settings in the “List of Phonebook Entries,” on the screen, to a CSV format file.
Click <Save> and select a folder to save the file into.
ⓘ You can edit the saved file in a spreadsheet.
ⓘ The saved file name depends on the selected Group.
(For example: The phonebook for Group 1 is saved to phonebook01.csv)

Phonebook screen

PBX Extension > Phonebook

■ Save or Write the Phonebook

❍ **About the rules of a CSV file for the phonebook**

When editing a saved CSV file, be sure to observe the following rules. Otherwise, the phonebook settings may not load properly into the RoIP gateway.

	A	B	C	D	E	F	G	H	I	J
1	#	VE-PG4	Phonebook	config file						
2	#	Firm Ver.								
3	#	File Ver.								
4	#No.	Name	Phone Number	_	_	Nickname	Speed Dial	Display Type (0=Phone Number/1=Speed Dial Number)	Line Type(0=Outside call/1=Extension)	group
5	1	Sales 1	tel:0123456788			Sales 1	tel:201	0	0	1
6	2	Sales 2	tel:0123456789			Sales 2	tel:202	0	0	1
7	3	John Smith	tel:0123456790			John	tel:	0	0	1
8										

Column	Header	Description
A	Index	1 ~ 300 for the Common phonebook, 1 ~ 100 for a Group phonebook Do not duplicate the number.
B	Name	Up to 30 characters
C	Phone Number	“tel:” and up to 22 digits or prefix
D	– (Reserved)	Do not edit or delete this column.
E	– (Reserved)	Do not edit or delete this column.
F	Nickname	Up to 30 characters
G	Speed Dial Number	“tel:” and up to 7 characters, leave blank if you do not use the Speed Dial Number.
H	Display Type	0: Phone Number, 1: Speed Dial Number
I	Line Type	0: External line, 1: Extension Do not edit or delete this column.
J	group	1 ~ 10 Do not edit or delete this column.

• The lines that begin with “#” are comments.
• Delete unnecessary lines.

Phonebook screen

PBX Extension > Phonebook

■ Phonebook Entry

You can enter frequently used or commonly used phone numbers into a phonebook.
Refer to the Installation guide for details on using a phonebook.

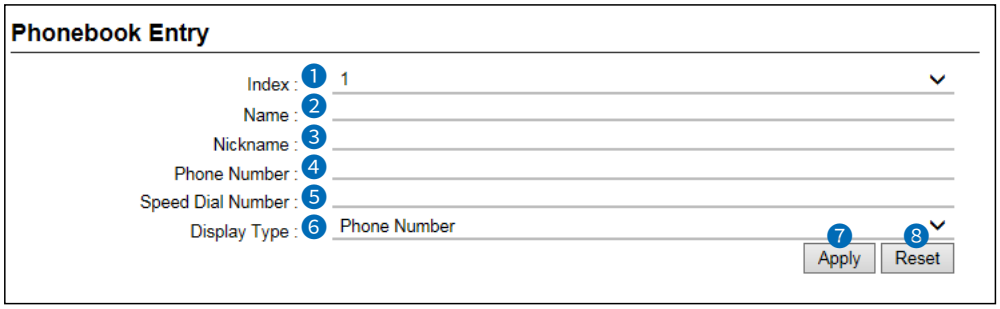

❶ Index ..... Select a number from the list.
- Range for the Common phonebook: 1 ~ 300
- Range for the Group phonebooks: 1 ~ 100

❷ Name* ..... Enter a destination name of up to 30 characters.

❸ Nickname* ..... Enter a nickname of up to 30 characters.

❹ Phone Number* ..... Enter the telephone number (with a special number and prefix, if required) of the destination.
ⓘ You cannot enter an alias number of up to 22 digits with a special number or a prefix.

❺ Speed Dial Number ..... Enter an alias number of up to 7 digits.
The Speed Dial Number is used when making an external call, or a Peer to Peer call (that does not go through the SIP server.)
ⓘ You cannot dial a Speed Dial Number after any special number and/or a prefix.
ⓘ A Speed Dial Number is usable on the line that is set in “Extension.”
ⓘ The Speed Dial Number is usable for telephones other than the KX series.

About the Speed Dial numbers
Setting numbers other than the emergency telephone numbers in your area are recommended as Speed Dial numbers.

*Required to enter a phonebook.

Phonebook screen

PBX Extension > Phonebook

■ Phonebook Entry

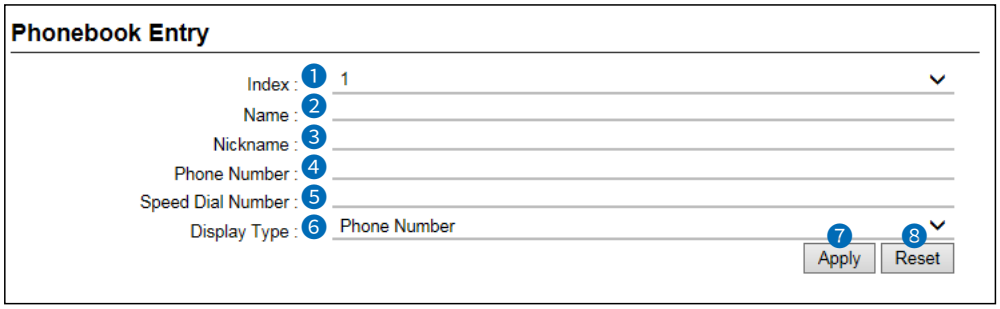

6 Display Type ..... Select “Phone Number” or “Speed Dial Number” to display a phonebook on the telephone. (Default: Phone Number)

7 <Apply> ..... Click to apply the entries.

8 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Phonebook screen

PBX Extension > Phonebook

■ List of Phonebook Entries

Lists the phonebook entries.

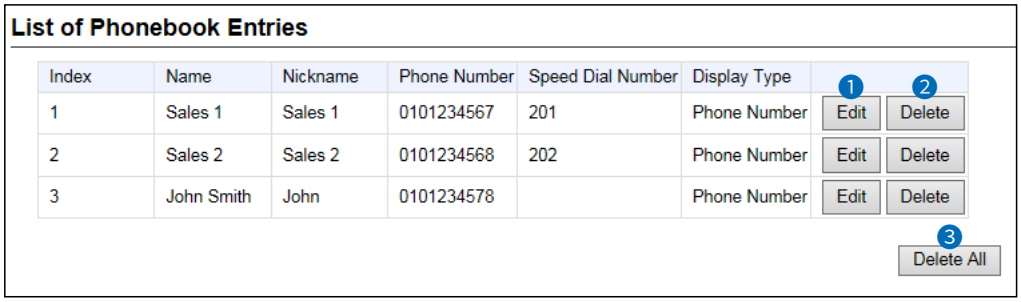

❶ **<Edit>** ..... Click to edit an entry.

❷ **<Delete>** ..... Click to delete an entry.
ⓘ You cannot restore after clicking <Delete>.

❸ **<Delete All>** ..... Click to delete all the entries.
ⓘ You cannot restore after clicking <Delete All>.

Transceiver Controller Telephone Connection screen

PBX Extension > Transceiver Controller Telephone Connection

■ Transceiver Controller Telephone Connection

Settings for communication between an IP transceiver and a SIP phone.



Extension Number …… Displays the extension number of the Transceiver Controller Telephone Connection that is set in “Extension.”
(PBX > Extension > Extension)

Transceiver Controller Telephone Connection screen

PBX Extension > Transceiver Controller Telephone Connection

■ Communication

Settings to communicate between a SIP phone and a transceiver that belongs to a group set in the RoIP gateway.

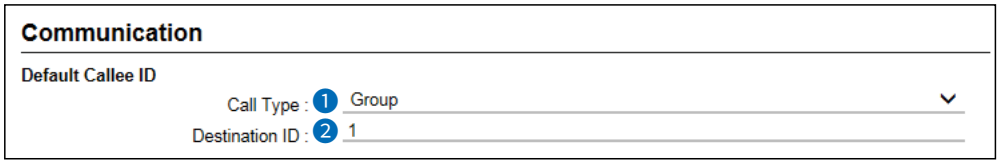

❶Call Type ..... Set the call type to send from a SIP phone to a transceiver that belongs to the RoIP gateway. (Default: Group)
- Options: Individual, Group, or All

❷Destination ID ..... Does not displayed when the Call Type (❶) is set to “All.”
Enter the Individual ID or Group ID of the destination transceiver. (Default: 1)
- Range: 1 ~ 60000

Transceiver Controller Telephone Connection screen

PBX Extension > Transceiver Controller Telephone Connection

■ Control

The settings for communication control between a SIP phone and a transceiver that are linked to the RoIP gateway.

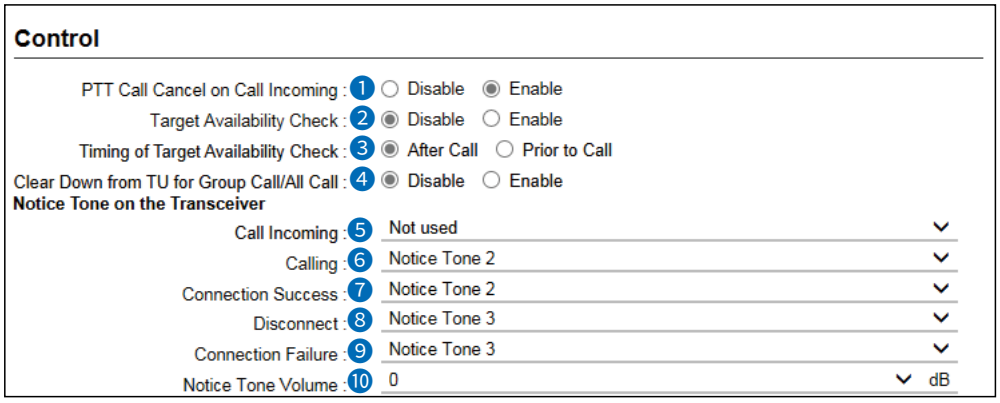

❶ PTT Call Cancel on Call Incoming ……

Select “Enable” to cancel the current call if a SIP phone receives another call from the same transceiver while a call is incoming.
(Default: Disable)

❷ Target Availability Check…

Select whether or not to check the availability of a destination transceiver when a SIP phone makes a call to it.
If this setting is enabled, the RoIP gateway will stop sending a call to a linked transceiver if the destination transceiver is busy, or it does not answer in 5 seconds. (Default: Enable)

❸ Timing of Target Availability Check ……

Set when the Target Availability Check (❷) will occur.
(Default: After Call)

- **After Call**: Checks after a call is established
- **Prior to Call**: Checks before a call is established

❹ Clear Down from TU for Group Call/All Call……

Select whether or not to allow the transceiver to clear down a received All, Group, or Talkgroup call. (Default: Disable)

ⓘ The IP501H, IP503H, IP504H, and IP501M are compatible with this function. (As of April 2026)

Transceiver Controller Telephone Connection screen

PBX Extension > Transceiver Controller Telephone Connection

■ Control

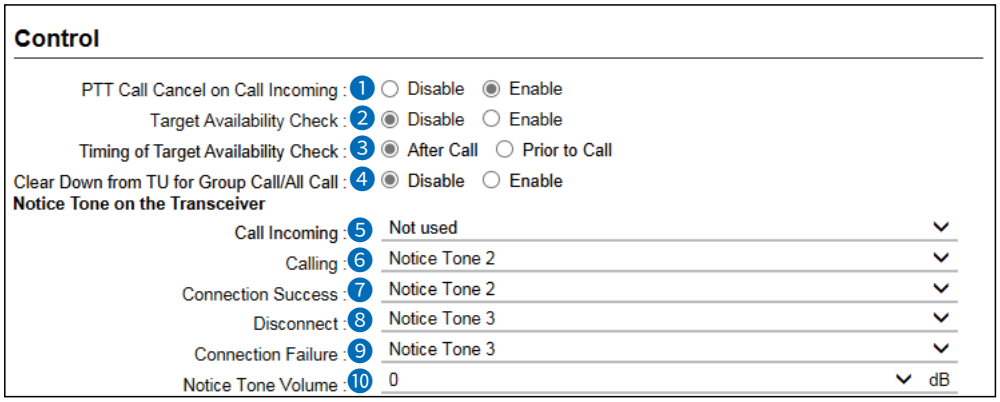

5 Call Incoming ..... Select a Notice Tone to send to notify a transceiver that a call from a SIP phone has arrived. (Default: Not used)

- **Not used**: Does not send a Notice Tone (The transceiver automatically answers.)
- **Notice Tone 1 ~ 3**: Sends the selected Notice Tone (The transceiver can answer by pushing [PTT] between the Notice Tones.)

6 Calling ..... The Notice Tone to send to a transceiver while calling a target SIP phone. (Default: Notice Tone 2)

7 Connection Success..... The Notice Tone to send to a transceiver alerting that the target SIP phone answered the call. (Default: Notice Tone 2)

8 Disconnect ..... The Notice Tone to send to a transceiver alerting that the target SIP phone has hung up the call. (Default: Notice Tone 3)

9 Connection Failure ..... The Notice Tone to send to a transceiver alerting that the call could arrive at the target SIP phone. (Default: Notice Tone 3)

10 Notice Tone Volume ..... Set the volume level of the Notice Tones (5 ~ 9). (Default: 0)

- Range: –12 (minimum) ~ +6 (maximum) (dB)

Transceiver Controller Telephone Connection screen

PBX Extension > Transceiver Controller Telephone Connection

■ Control

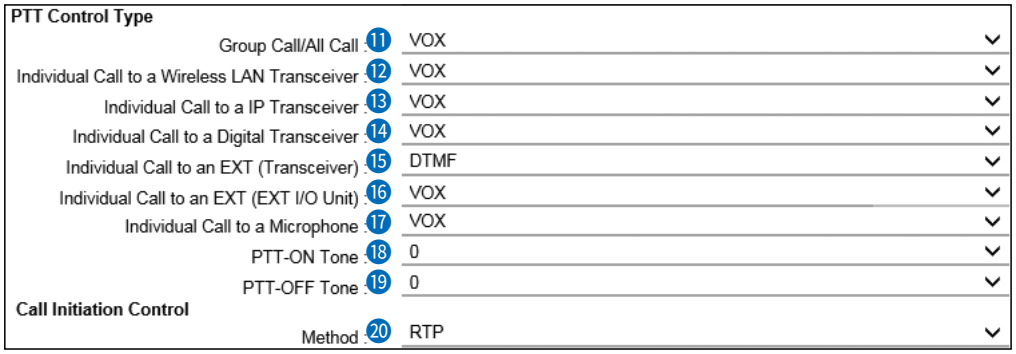

ⓘ "PTT-ON Tone" (⑱) and "PTT-OFF Tone" (⑲) are displayed only when any PTT Control Types from "Group Call/All Call" (⑪) to "Individual Call to a Microphone" (⑰) are set to "DTMF."

❍ PTT Control Type

Sets the type of signal that SIP phones use to communicate for each call type or destination device type.

• Options: VOX (Voice signal,) DTMF (Tone signal,) or Constant Transmission during Call

ⓘ When "Constant Transmission during Call" is selected, the No Voice Release Timer detects the communication status only by the signal received from the specified destination.
(PBX Extension > Transceiver Controller Telephone Connection > Release Timer)
If a signal from the specified destination is not received for the set period of time, the call may be terminated because of the No Vice Release Timer function.

⑪ Group Call/ All Call ……

Set the signal type for Group Calls and All Calls to the linked transceivers. (Default: VOX)

- **VOX**: When a voice signal is received from a SIP phone, the target transceiver enters the transmit mode.
- **DTMF**: When a tone signal is received from a SIP phone, the target transceiver enters the transmit mode.
- **Constant Transmission during Call**:
  As soon as the communication is established, the target transceiver enters the transmit mode.
  The No Voice Release Timer detects only the signal (VOX or RTP) received from the Converter Bridge connection destination.

⑫ Individual Call to a Wireless LAN Transceiver

Set the signal type for Individual calls to WLAN transceivers. (Default: VOX)

- **VOX**: When detecting a voice signal from a SIP phone, the target Wireless LAN transceiver enters the receive mode.
- **DTMF**: When detecting a tone signal from a SIP phone, the target Wireless LAN transceiver enters the receive mode.
- **Constant Transmission during Call**:
  As soon as the communication is established, the target Wireless LAN transceiver enters the receive mode.
  The No Voice Release Timer detects only the signal (VOX or RTP) received from the WLAN transceiver.

Transceiver Controller Telephone Connection screen

PBX Extension > Transceiver Controller Telephone Connection

■ Control

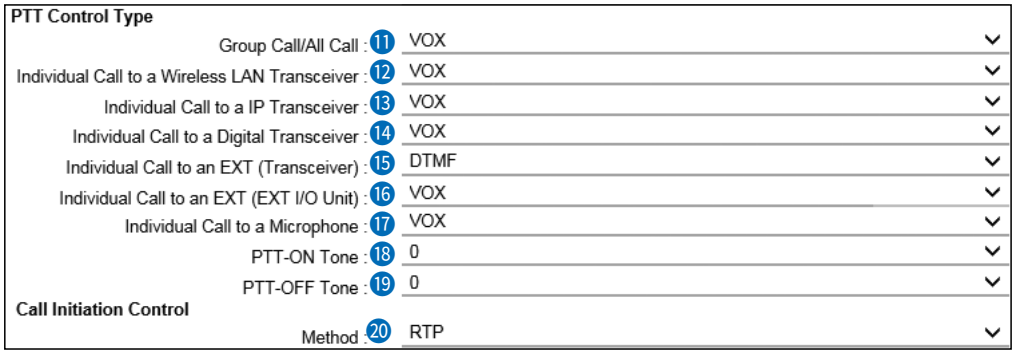

ⓘ "PTT-ON Tone" (18) and "PTT-OFF Tone" (19) are displayed only when any PTT Control Types from "Group Call/All Call" (11) to "Individual Call to a Microphone" (17) are set to "DTMF."

13 Individual Call to a IP Transceiver.....

Set the signal type for Individual calls to IP transceivers.

(Default: VOX)

- **VOX**: When detecting a voice signal from a SIP phone, the IP transceiver connected to the RoIP Gateway enters the transmit mode.
- **DTMF**: When detecting a tone signal from a SIP phone, the target IP transceiver enters the receive mode.
- **Constant Transmission during Call**:
  As soon as the communication is established, the IP transceiver connected to the RoIP Gateway enters the transmit mode.
  The No Voice Release Timer detects only the signal (VOX or RTP) received from the IP transceiver.

14 Individual Call to a Digital Transceiver .....

Set the signal type for Individual Calls to digital transceivers.

(Default: VOX)

- **VOX**: When a voice signal is received from a SIP phone, the Digital Transceiver enters the transmit mode.
- **DTMF**: When a tone signal is received from a SIP phone, the Digital Transceiver enters the transmit mode.
- **Constant Transmission during Call**:
  As soon as the communication is established, the Digital Transceiver enters the receive mode.
  The No Voice Release Timer detects only the signal (VOX or RTP) received from the Digital Transceiver.

15 Individual Call to an EXT (Transceiver) .....

Set the signal type for Individual Calls to EXT (transceivers.)

(Default: VOX)

- **VOX**: When a voice signal is received from a SIP phone, the EXT (transceiver) enters the transmit mode.
- **DTMF**: When a tone signal is received from a SIP phone, the EXT (transceiver) enters the transmit mode.
- **Constant Transmission during Call**:
  As soon as the communication is established, the EXT (transceiver) enters the transmit mode.
  The No Voice Release Timer detects only the signal (VOX or RTP) received from the EXT (transceiver.)

Transceiver Controller Telephone Connection screen

PBX Extension > Transceiver Controller Telephone Connection

■ Control

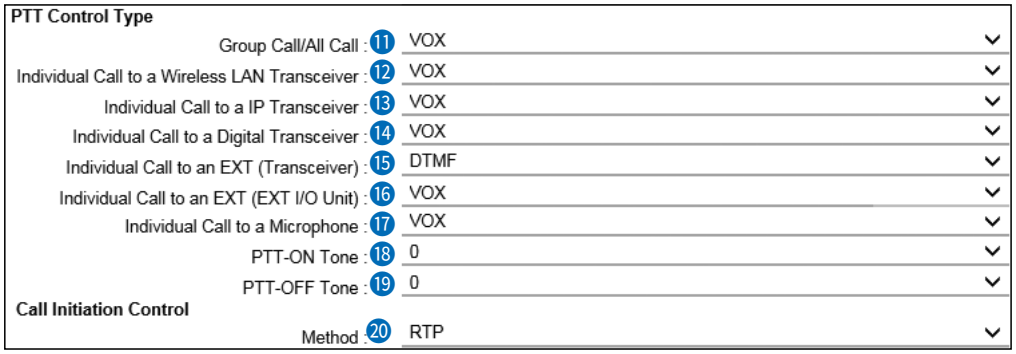

ⓘ "PTT-ON Tone" (18) and "PTT-OFF Tone" (19) are displayed only when any PTT Control Types from "Group Call/All Call" (11) to "Individual Call to a Microphone" (17) are set to "DTMF."

16 Individual Call to an EXT (EXT I/O Unit) ..... Set the signal type for Individual Calls to EXT (I/O units.)

(Default: VOX)

- **VOX**: When a voice signal is received from a SIP phone, the EXT (I/O Unit) enters the transmit mode.
- **DTMF**: When a tone signal is received from a SIP phone, the EXT (I/O Unit) enters the transmit mode.
- **Constant Transmission during Call**:
  As soon as communication is established, the EXT (I/O Unit) enters the transmit mode.
  The No Voice Release Timer detects only the signal (VOX or RTP) received from the EXT (I/O Unit.)

17 Individual Call to a Microphone ..... Set the signal type for Individual Calls to a speaker microphone.

(Default: VOX)

- **VOX**: When a voice signal is received from a SIP phone, the speaker microphone enters the receive mode.
- **DTMF**: When a tone signal is received from a SIP phone, the speaker microphone enters the receive mode.
- **Constant Transmission during Call**:
  As soon as communication is established, the microphone enters the receive mode.
  The No Voice Release Timer detects only the signal (VOX or RTP) received from the speaker microphone.

Transceiver Controller Telephone Connection screen

PBX Extension > Transceiver Controller Telephone Connection

■ Control

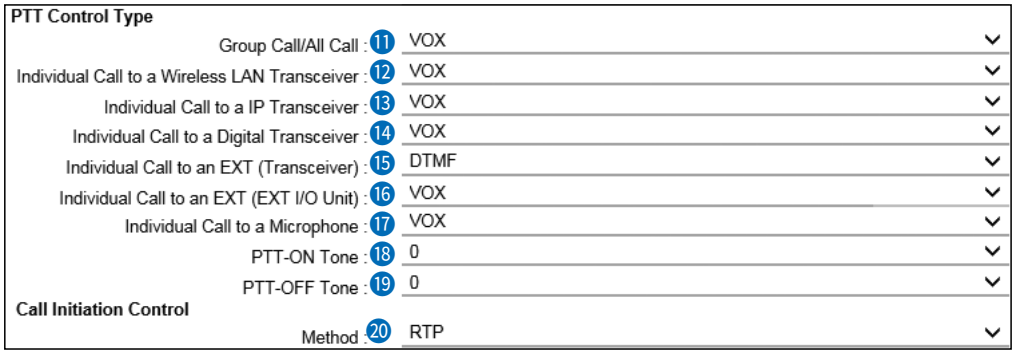

ⓘ "PTT-ON Tone" (⑱) and "PTT-OFF Tone" (⑲) are displayed only when any PTT Control Types from "Group Call/All Call" (⑪) to "Individual Call to a Microphone" (⑰) are set to "DTMF."

⑱ PTT-ON Tone ..... Select the PTT-ON tone when any signal types shown above (⑪ ~ ⑰) is set to "DTMF." (Default: 0)

- Range: 0 ~ 9, *, or #

ⓘ Dial this number on the SIP phone to make a destination device start transmitting.

ⓘ If you enter the same value in both the PTT-ON Tone and the PTT-OFF Tone, you can toggle the destination device status by dialing this number.

⑲ PTT-OFF Tone..... Select the PTT-OFF tone when any signal types shown above (⑪ ~ ⑰) is set to "DTMF." (Default: 0)

- Range: 0 ~ 9, *, or #

ⓘ Dial this tone on the SIP phone to make the destination device stop transmitting.

ⓘ If you enter the same value in both the PTT-ON Tone and PTT-OFF Tone, you can toggle the destination device status by dialing this number.

⑳ Method ..... Set the transmitting trigger to make a call from a transceiver controller to the IP telephone system. (Default: RTP)

- **VOX**: Starts dialing when the VOX detects voice data in the voice packet that is received by the bridge interface through the RTP (Real-time Transport Protocol).
- **RTP**: Starts dialing when the RTP (voice data packet) is longer than the set period time in the Attack Time setting is received, regardless of if the RTP includes voice data or not.

Transceiver Controller Telephone Connection screen

PBX Extension > Transceiver Controller Telephone Connection

■ PTT Control Setting

The VOX (voice operated transmission) function automatically switches the connected transceiver to transmit, when the RoIP gateway receives an audio signal through the network.

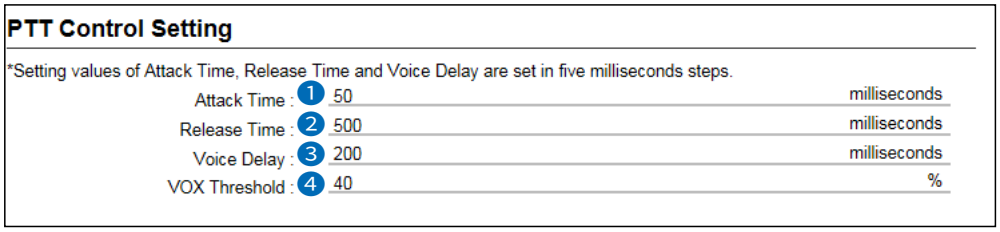

❶Attack Time ..... Enter the TX delay time. (Default: 50)
• Range: 5 ~ 500 (milliseconds) in 5 millisecond steps
After the continuous signal for the set period of time is received from a SIP phone, the transceiver controller starts to transmit.

❷Release Time ..... Select the RX delay time. (Default: 500)
• Range: 5 ~ 2000 (milliseconds) in 5 millisecond steps
This is the delay time for the VOX to turn OFF, after no audio signal is received through the network.

❸Voice Delay ..... Set the audio signal buffer time to prevent intermittent audio. (Default: 200)
• Range: 0 ~ 1500 (milliseconds) in 5 millisecond steps
The voice delay is the amount of time the RoIP gateway stores the transmitted audio to prevent missing the first part of the speech.

❹VOX Threshold ..... Set the voice threshold level. (Default: 40)
• Range: 0 ~ 100 (%)
The VOX function automatically switches between receive and transmit according to this threshold level. The lower values make the VOX function more sensitive to the voice input.

Transceiver Controller Telephone Connection screen

PBX Extension > Transceiver Controller Telephone Connection

■ Call Initiation Setting

Sets the details on voice transmission to the SIP phone when there is voice input from the transceiver controller.

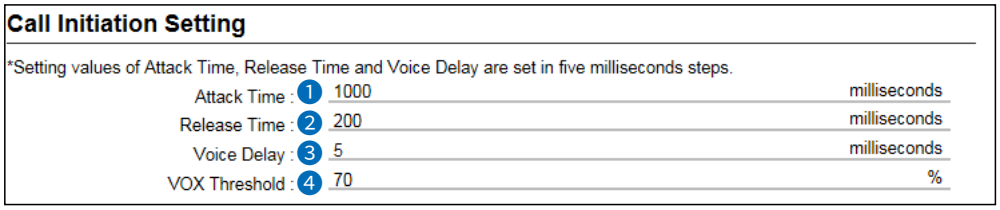

❶Attack Time ..... Enter the TX attack time in 5 millisecond steps. It is the delay time before the VOX switch turns ON after an audio signal is received through the network. (Default: 1000)
• Range: 5 ~ 2000 (milliseconds) in 5 millisecond steps

❷Release Time ..... Select the RX delay time in 5 millisecond steps. It is the delay time for the VOX switch to turn OFF after no audio signal is received through the network. (Default: 200)
• Range: 5 to 2000 (milliseconds) in 5 millisecond steps

❸Voice Delay ..... Set the audio signal buffer time to prevent intermittent audio. (Default: 5)
• Range: 0 ~ 500 (milliseconds) in 5 millisecond steps

❹VOX Threshold ..... The VOX function automatically switches between receive and transmit according to this threshold level. (Default: 70)
• Range: 0 ~ 100 (%)
ⓘ Lower values make the VOX function more sensitive to the audio signal.

Transceiver Controller Telephone Connection screen

PBX Extension > Transceiver Controller Telephone Connection

■ Notice Tone on the Telephone

Sets the details on the notification to a SIP phone, when a call has arrived on a transceiver controller from a SIP phone.

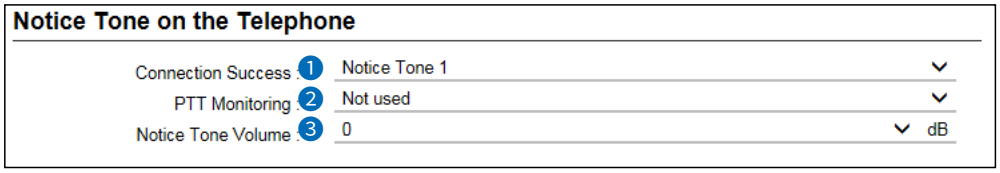

❶Connection Success …… Select a Notice Tone to notify a SIP phone that a call has arrived on the transceiver controller and the SIP phone is ready to transmit.
(Default: Notice Tone 1)

- **Not used**: Does not send a Notice Tone
- **Notice Tone 1 ~ 3**: Sends the selected Notice Tone

❷PTT Monitoring …… Select a Notice Tone to alert you to switch receiving and transmitting.
(Default: Not used)

- **Not used**: Does not send a Notice Tone
- **Notice Tone 1 ~ 3**: Sends the selected Notice Tone

❸Notice Tone Volume …… Set the volume level of the Notice Tones (❶ ~ ❷). (Default: 0)

- Range: –12 (minimum) ~ +6 (maximum) (dB)

Transceiver Controller Telephone Connection screen

PBX Extension > Transceiver Controller Telephone Connection

■ Release Timer

Sets the timers for canceling or disconnecting a call.

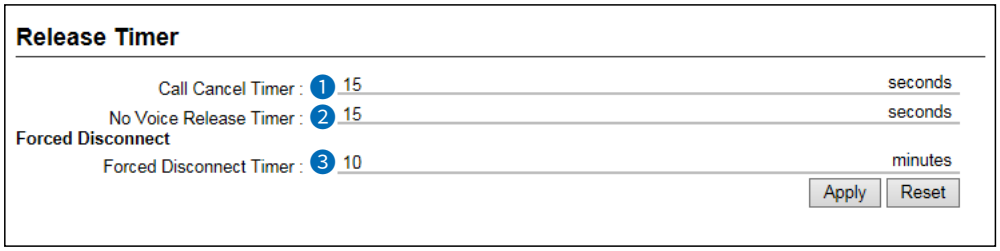

❶Call Cancel Timer ..... Enter the period of time to cancel the call. When the set time has passed without a response from the SIP phone, the call is canceled. (Default: 15)

- Range: 0 (OFF) or 5 ~ 60 (seconds)

❷No Voice Release Timer ... Enter the period of time to stop transmitting. When the set time has passed with no audio signal, transmitting is stopped. (Default: 15)

- Range: 0 (OFF) or 5 ~ 600 (seconds)

❸Forced Disconnect Timer Enter the period of time to be forcibly stop transmitting. When the set time has passed, transmitting is stopped, even when communication is ongoing. (Default: 10)

- Range: 0 (OFF) or 5 ~ 120 (minutes)

Converter Bridge screen

PBX Extension > Converter Bridge

■ Converter Bridge

Selects an extension whose settings you want to edit settings in the “Connection” item below.



Extension Number …… Displays the extension number of the Converter Bridge, if it is set in “Extension” (PBX > Extension > Extension.)

Converter Bridge screen

PBX Extension > Converter Bridge

■ Connection

Sets the destination device of the bridge connection that connects to the SIP phones

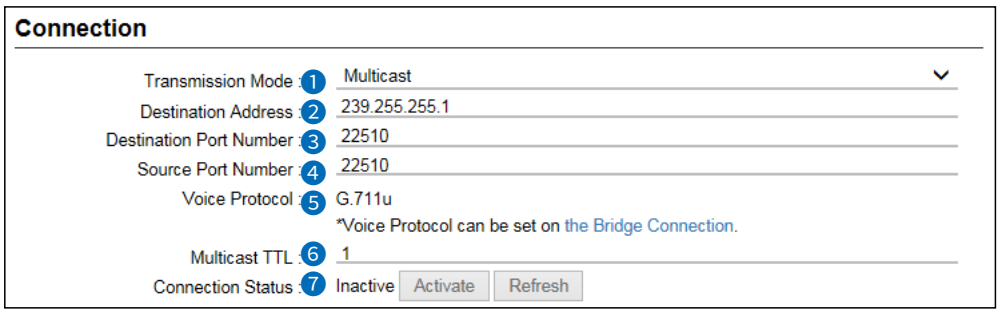

ⓘ The screen above is when the Transmission Mode (❶) is set to “Multicast”.

❶ Transmission Mode ..... Set the transmission mode on each extension (port) number.
(Default: Unicast)

❷ Destination Address ..... Set an appropriate IP address, depending on the Transmission Mode (❶) setting.

- **For Unicast**: Set the IP address for the LAN, or the domain name of the destination, that of up to 63 characters. (Default: Blank)
- **For Multicast**: Set the same value as the bridge setting of the call destination. (Default: 239.255.255.1)

❸ Destination Port Number... Set the same port number as the “Source Port Number” (❹) setting of the VE-PG4 that works as the Converter Bridge connection Destination.

- Range: An even number from 2 to 65534.

ⓘ Do not duplicate other connection port settings.

❍ The Default port settings in the Unicast mode

PORT	DEFAULT	PORT	DEFAULT
Converter Bridge 1	24200	Converter Bridge 11	24220
Converter Bridge 2	24202	Converter Bridge 12	24222
Converter Bridge 3	24204	Converter Bridge 13	24224
Converter Bridge 4	24206	Converter Bridge 14	24226
Converter Bridge 5	24208	Converter Bridge 15	24228
Converter Bridge 6	24210	Converter Bridge 16	24230
Converter Bridge 7	24212	Converter Bridge 17	24232
Converter Bridge 8	24214	Converter Bridge 18	24234
Converter Bridge 9	24216	Converter Bridge 19	24236
Converter Bridge 10	24218	Converter Bridge 20	24238

Converter Bridge screen

PBX Extension > Converter Bridge

■ Connection

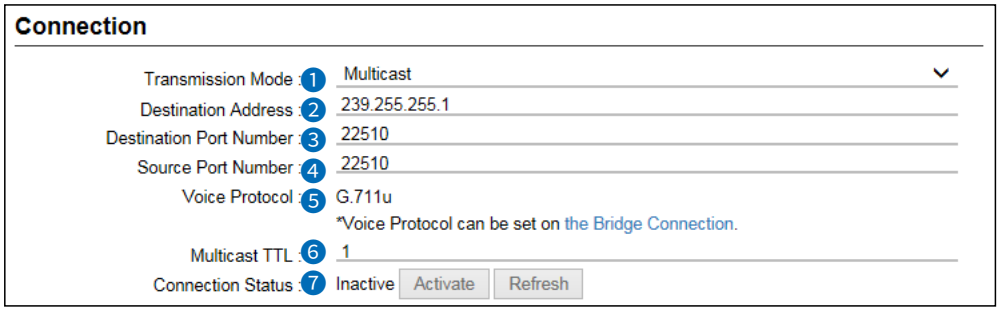

ⓘ The screen above is when the Transmission Mode (❶) is set to “Multicast”.

❸ Destination Port Number (Continued)

❍ **The Default port settings in the Multicast mode**

PORT	DEFAULT	PORT	DEFAULT
Converter Bridge 1	22510	Converter Bridge 11	22510
Converter Bridge 2	22510	Converter Bridge 12	22510
Converter Bridge 3	22510	Converter Bridge 13	22510
Converter Bridge 4	22510	Converter Bridge 14	22510
Converter Bridge 5	22510	Converter Bridge 15	22510
Converter Bridge 6	22510	Converter Bridge 16	22510
Converter Bridge 7	22510	Converter Bridge 17	22510
Converter Bridge 8	22510	Converter Bridge 18	22510
Converter Bridge 9	22510	Converter Bridge 19	22510
Converter Bridge 10	22510	Converter Bridge 20	22510

❹ Source Port Number..... Set the same port number as the setting in the Converter Bridge connection destination.

- Range: An even number from 2 to 65534

ⓘ Do not duplicate other connection port settings, when using in the Unicast mode.

❍ **The Default port settings in the Unicast mode**

PORT	DEFAULT	PORT	DEFAULT
Converter Bridge 1	24200	Converter Bridge 11	24220
Converter Bridge 2	24202	Converter Bridge 12	24222
Converter Bridge 3	24204	Converter Bridge 13	24224
Converter Bridge 4	24206	Converter Bridge 14	24226
Converter Bridge 5	24208	Converter Bridge 15	24228
Converter Bridge 6	24210	Converter Bridge 16	24230
Converter Bridge 7	24212	Converter Bridge 17	24232
Converter Bridge 8	24214	Converter Bridge 18	24234
Converter Bridge 9	24216	Converter Bridge 19	24236
Converter Bridge 10	24218	Converter Bridge 20	24238

Converter Bridge screen

PBX Extension > Converter Bridge

■ Connection

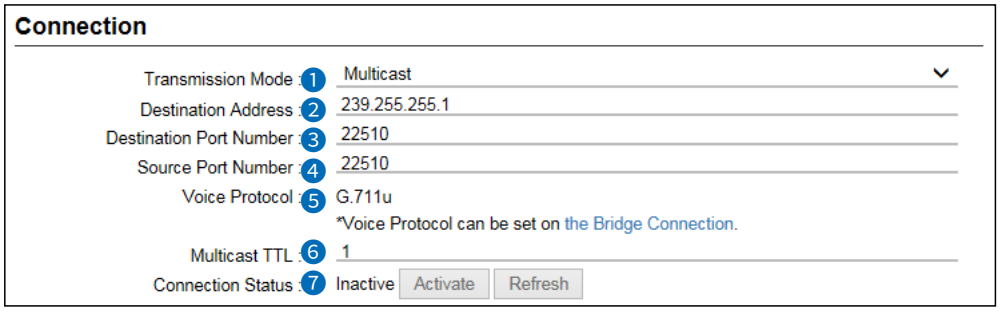

ⓘ The screen above is when the Transmission Mode is set to “Multicast”.

❹ Source Port Number (Continued)

❍ **The Default port settings in the Multicast mode**

PORT	DEFAULT	PORT	DEFAULT
Converter Bridge 1	22510	Converter Bridge 11	22510
Converter Bridge 2	22510	Converter Bridge 12	22510
Converter Bridge 3	22510	Converter Bridge 13	22510
Converter Bridge 4	22510	Converter Bridge 14	22510
Converter Bridge 5	22510	Converter Bridge 15	22510
Converter Bridge 6	22510	Converter Bridge 16	22510
Converter Bridge 7	22510	Converter Bridge 17	22510
Converter Bridge 8	22510	Converter Bridge 18	22510
Converter Bridge 9	22510	Converter Bridge 19	22510
Converter Bridge 10	22510	Converter Bridge 20	22510

❺ Voice Protocol ..... Displays the assigned Voice Protocol in the “AMBE+2 Vocoder Assignment” setting.
(Bridge Connection Setting > Bridge Connection > AMBE+2 Vocoder Assignment)

❻ Multicast TTL ..... Displayed only when Transmission Mode (❶) is set to “Multicast.”
For the expiration data of the voice packet, set the TTL (Time To Live) until the voice packet reaches the communication destination.
(Default: 1)

- Range: 1 ~ 255

❼ Connection Status..... Displays the status of the Converter Bridge connection. Click <Refresh> to reload the status, or <Activate> to activate the set devices.
ⓘ After they are successfully activated, the button changes to “Inactivate.”

Converter Bridge screen

PBX Extension > Converter Bridge

■ Communication

The settings to communicate between the RoIP gateway and a converter bridge connection destination.

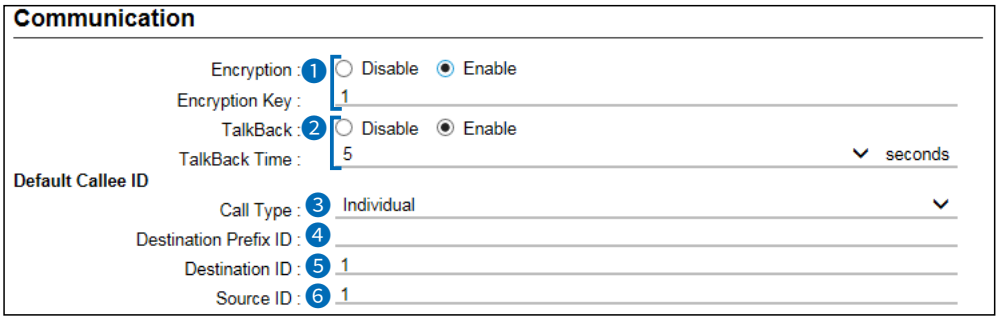

ⓘ The screen shows when both Encryption and Talkback are enabled.

❶ Encryption .....
Select “Enable” to encrypt the communication. (Default: Disable)
When you select “Enable,” enter the appropriate key in “Encryption Key.”
• Range: 1 ~ 32767
ⓘ This setting takes effect when the AMBE+2 codec is used.

❷ TalkBack .....
Commonly used by the transceivers that belong to a group set in the RoIP Gateway. Set the period of time from when the transceiver finishes transmitting until the screen returns to the standby mode. (Default: 5)
• Range: 1 ~ 10 (seconds)

❸ Call Type .....
Set the call type to send from a SIP phone to a transceiver that belongs to the Converter Bridge connection destination. (Default: Group)
• Options: Individual, Group, or All

❹ Destination Prefix ID.....
Enter the prefix ID of the destination. (Default: Blank)
• Range: Blank or 0 ~ 30
ⓘ The range differs, depending on the system settings

❺ Destination ID.....
Does not displayed when the Call Type (❸) is set to “All.”
Enter an Individual ID or Group ID of the destination transceiver, that is entered into the Converter Bridge connection destination. (Default: 1)
• Range: When the Prefix is not set: 1 ~ 9999999
When the Prefix is set: 1 ~ 99999

❻ Source ID .....
Enter an Individual ID or Group ID of the caller.
This ID will be announced at the call destination. (Default: 1)
• Range: 1 ~ 9999999

Converter Bridge screen

PBX Extension > Converter Bridge

■ Control

The settings for the communication control between the RoIP gateway and a Converter Bridge connection destination.

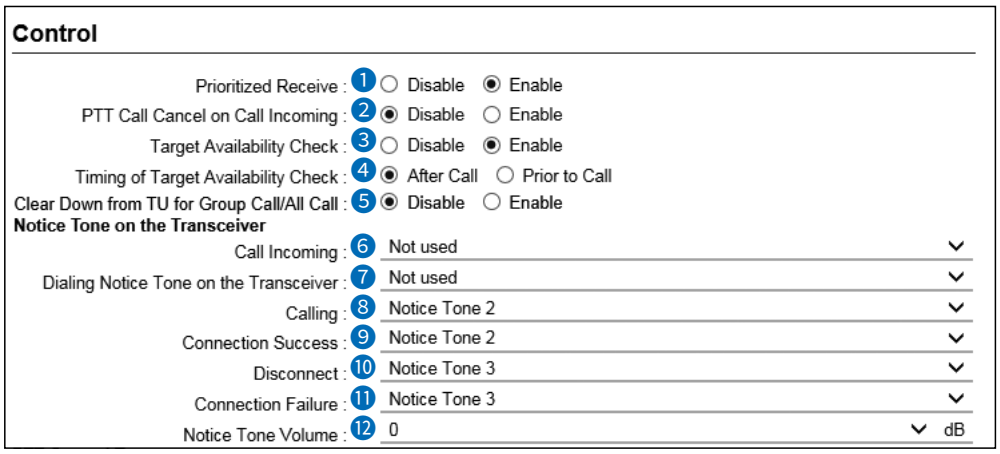

❶ Prioritized Receive ..... Select “Enable” to inhibit a SIP phone from transmitting an RTP signal while it is receiving an RTP signal from a Converter Bridge connection destination. (Default: Disable)

❷ PTT Call Cancel on Call Incoming ..... Select “Enable” to cancel the current call if a SIP phone receives another call from the same Converter Bridge connection destination while a call is incoming. (Default: Disable)

❸ Target Availability Check... Displayed only when the voice protocol setting on the Converter Bridge is set to “Bridge Protocol” or “Protocol for Transceiver and SIP Phone connection” in the “AMBE+2 Vocoder Assignment.” (Bridge Connection Settings > Bridge Connection > AMBE+2 Vocoder Assignment > Converter Bridge 1 ~ 20)
Select whether or not to check the availability of a Converter Bridge connection destination when a device such as SIP phone linked to this RoIP gateway makes a call (excluding an emergency call) to it.
If this setting is enabled, the RoIP gateway will stop sending a call to a linked transceiver when the destination transceiver is busy, or it does not answer in 5 seconds. (Default: Enable)

❹ Timing of Target Availability Check ..... Set when the Target Availability Check (❸) will occur. (Default: After Call)

- **After Call**: Checks after a call is established
- **Prior to Call**: Checks before a call is established

❺ Clear Down from TU for Group Call/All Call..... Select whether or not to allow the transceiver to clear down a received All, Group, or Talkgroup call. (Default: Disable)

Converter Bridge screen

PBX Extension > Converter Bridge

■ Control

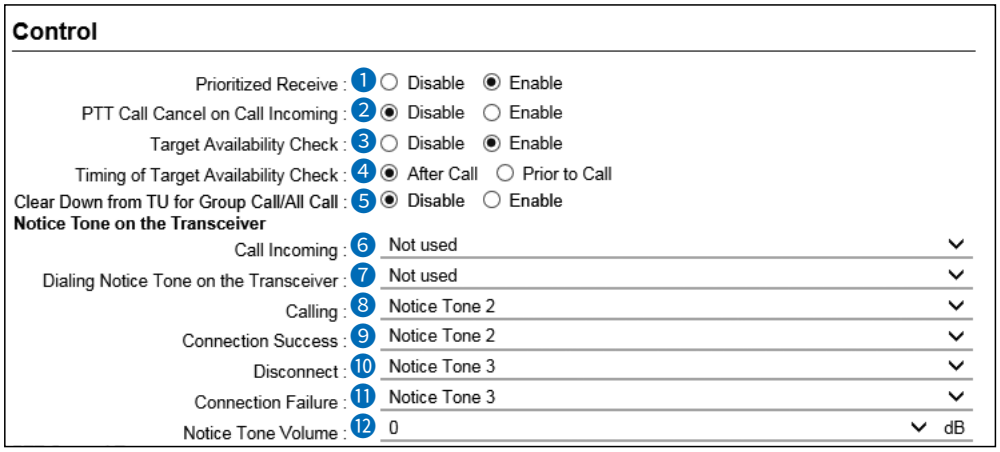

6 Call Incoming ..... Select a Notice Tone to send to notify a client transceiver that a call from a SIP phone has arrived. (Default: Not used)

- **Not used**: Does not send a Notice Tone (The transceiver automatically answers.)
- **Notice Tone 1 ~ 3**: Sends the selected Notice Tone (The transceiver can answer by pushing [PTT] between the Notice Tones.)

7 Dialing Notice Tone on the Transceiver ..... Displayed when the “DTMF Dialing” (p.13-69) is enabled. (Default: Not used)

8 Calling ..... The Notice Tone to send to a caller transceiver alerting that the target SIP phone answered the call. (Default: Notice Tone 2)

9 Connection Success..... The Notice Tone to send to a caller transceiver alerting that the target SIP phone has hung up the call. (Default: Notice Tone 2)

10 Disconnect ..... The Notice Tone to send to a caller transceiver alerting that the call could arrive at the target SIP phone. (Default: Notice Tone 3)

11 Connection Failure ..... The Notice Tone to send to a caller transceiver alerting that the call could arrive at the target SIP phone. (Default: Notice Tone 3)

12 Notice Tone Volume ..... Set the volume level of the Notice Tones (6 ~ 11). (Default: 0)

- Range: –12 (minimum) ~ +6 (maximum) (dB)

Converter Bridge screen

PBX Extension > Converter Bridge

■ Control

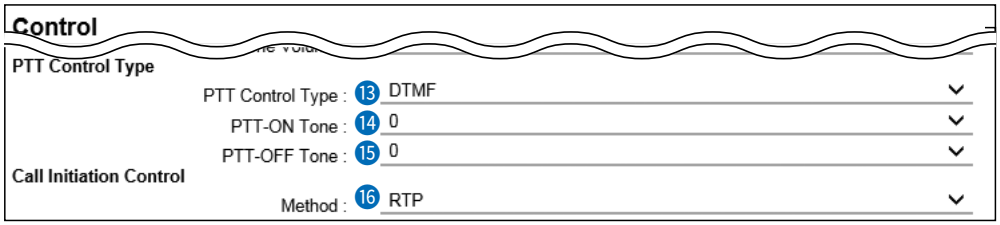

ⓘ "PTT-ON Tone" (⓮) and "PTT-OFF Tone" (⓯) are displayed only when "PTT Control Type" (⓭) is set to "DTMF."

⓭ PTT Control Type .....

Sets the type of signal that SIP phones use to communicate for each call type or destination device type. (Default: VOX)

- **VOX**: When a voice signal is received from a SIP phone, the target transceiver enters the transmit mode.
- **DTMF**: When a tone signal is received from a SIP phone, the target transceiver enters the transmit mode.
- **Constant Transmission during Call**:
  As soon as communication is established, the target transceiver enters the transmit mode.
  The No Voice Release Timer detects only the signal (VOX or RTP) received from the Converter Bridge connection destination.

ⓘ When "Constant Transmission during Call" is selected, the No Voice Release Timer detects the communication status only by the received signal from the specified destination.
(PBX Extension > Transceiver Controller Telephone Connection > Release Timer)
If a signal from the specified destination is not received for the set period of time, the call may be terminated because of the No Voice Release Timer function.

⓮ PTT-ON Tone .....

Select the PTT-ON tone when the either the signal types shown above (⓭) is set to "DTMF." (Default: 0)

- Range: 0 ~ 9, *, or #

ⓘ Dial this number on the SIP phone to make a destination device start transmitting.

ⓘ If you enter the same value to both the PTT-ON Tone and the PTT-OFF Tone, you can toggle the destination device status by dialing this number.

Converter Bridge screen

PBX Extension > Converter Bridge

■ Control

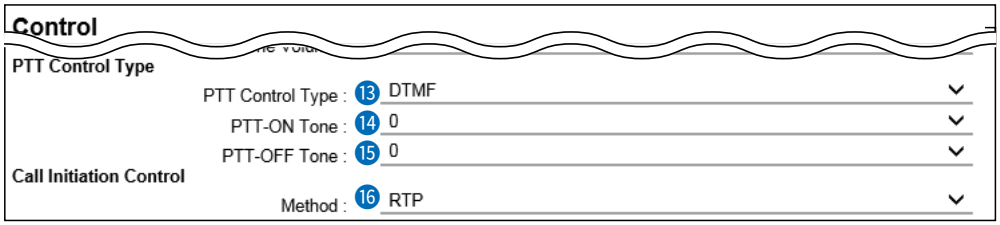

ⓘ "PTT-ON Tone" (⓮) and "PTT-OFF Tone" (⓯) are displayed only when "PTT Control Type" (⓭) is set to "DTMF."

⓯ PTT-OFF Tone..... Select the PTT-OFF tone when the PTT Control Tone (⓭) is set to "DTMF." (Default: 0)

- Range: 0 ~ 9, *, or #

ⓘ Dial this tone on the SIP phone to make the destination device stop transmitting.

ⓘ If you enter the same value to both the PTT-ON Tone and PTT-OFF Tone, you can toggle the destination device status by dialing this number.

⓰ Method ..... Set the transmitting trigger to make a call from a bridge to the IP telephone system. (Default: RTP)

- **VOX**: Starts dialing when the VOX detects voice data in the voice packet that is received by the bridge interface through RTP (Real-time Transport Protocol).
- **RTP**: Starts dialing when RTP (voice data packet) is received later than the set period time in the Attack Time setting, regardless of if the RTP includes voice data or not.

Converter Bridge screen

PBX Extension > Converter Bridge

■ DTMF Dialing

Set details on DTMF Dialing through a Converter Bridge connection port.

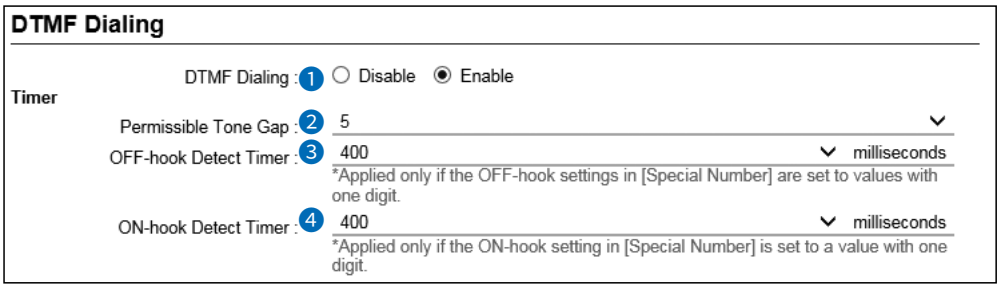

ⓘ The screen above shows when “DTMF Dialing” (❶) is set to “Enable.”

❶DTMF Dialing …… Select “Enable” to use DTMF signaling.
If enabled, set the details in the timer. (Default: Disable)

❷Permissible Tone Gap …… Set the period of time to detect that the last digit has been input. (Default: 5)

- Range: 1 ~ 10 (seconds)

ⓘ Applied only when a 1 digit number is set to the OFF-hook settings on the Special Number screen.

❸OFF-hook Detect Timer … Set the period of time to detect the OFF-hook control signal. (Default: 400)

- Range: 0 ~ 2000 (milliseconds)

ⓘ Applied only when a 1 digit number is set to the OFF-hook settings on the Special Number screen.

❹ON-hook Detect Timer …… Select the period of time to detect the ON-hook control signal. (Default: 400)

- Range: 0 ~ 2000 (milliseconds)

Converter Bridge screen

PBX Extension > Converter Bridge

■ PTT Control Setting

The VOX (voice operated transmission) function automatically switches the connected transceiver to transmit, when the RoIP gateway receives an audio signal to the Converter Bridge connection destination device.

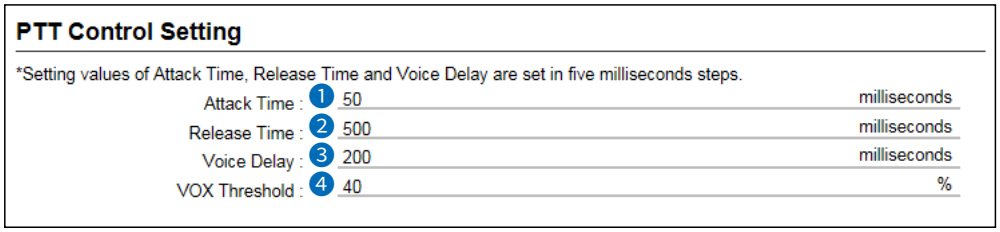

❶Attack Time ..... Enter the TX delay time. (Default: 50)
- Range: 5 ~ 500 (milliseconds) in 5 millisecond steps
- After the continuous signal for the set period of time is received from a SIP phone, the transceiver controller starts to transmit.

❷Release Time ..... Select the RX delay time. (Default: 500)
- Range: 5 ~ 2000 (milliseconds) in 5 millisecond steps

This is the delay time for the VOX to turn OFF, after no audio signal is received through the network.

❸Voice Delay ..... Set the audio signal buffer time to prevent intermittent audio. (Default: 200)
- Range: 0 ~ 500 (milliseconds) in 5 millisecond steps

The voice delay is the amount of time the RoIP gateway stores the transmitted audio to prevent missing the first part of the speech.

❹VOX Threshold ..... Set the voice threshold level. (Default: 40)
- Range: 0 ~ 100 (%)

The VOX function automatically switches between receive and transmit according to this threshold level. The lower values make the VOX function more sensitive to the voice input.

Converter Bridge screen

PBX Extension > Converter Bridge

■ Call Initiation Setting

The VOX (voice operated transmission) function automatically switches the connected transceiver to receive, when the RoIP gateway receives the audio signal from the bridge connection destination device.

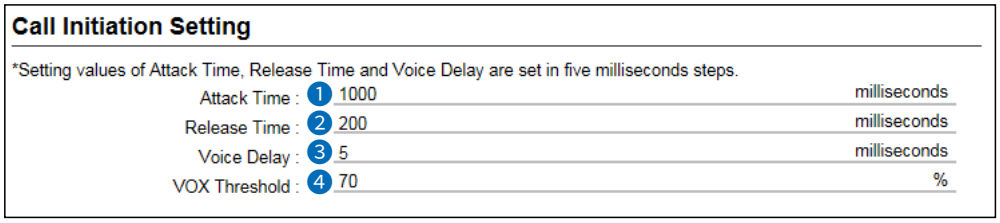

❶Attack Time ..... Enter the TX attack time. It is the delay time before the VOX switch turns ON after an audio signal is received through the network. (Default: 1000)

- Range: 5 ~ 2000 (milliseconds) in 5 millisecond steps

❷Release Time ..... Select the RX delay time in 5 millisecond steps. It is the delay time for the VOX switch to turn OFF after no audio signal is received through the network. (Default: 200)

- Range: 5 to 2000 (milliseconds) in 5 millisecond steps

❸Voice Delay ..... Set the audio signal buffer time to prevent intermittent audio. (Default: 5)

- Range: 0 ~ 500 (milliseconds) in 5 millisecond steps

❹VOX Threshold ..... Set the voice threshold level. The audio signal is output to the network according to this threshold level. (Default: 70)

- Range: 0 ~ 100 (%)

ⓘ The lower values make the VOX function more sensitive to the voice input.

Converter Bridge screen

PBX Extension > Converter Bridge

■ AGC Setting

The AGC (Automatic Gain Control) function can automatically control the audio gain to properly adjust the audio signal level received through a Converter Bridge connection port.

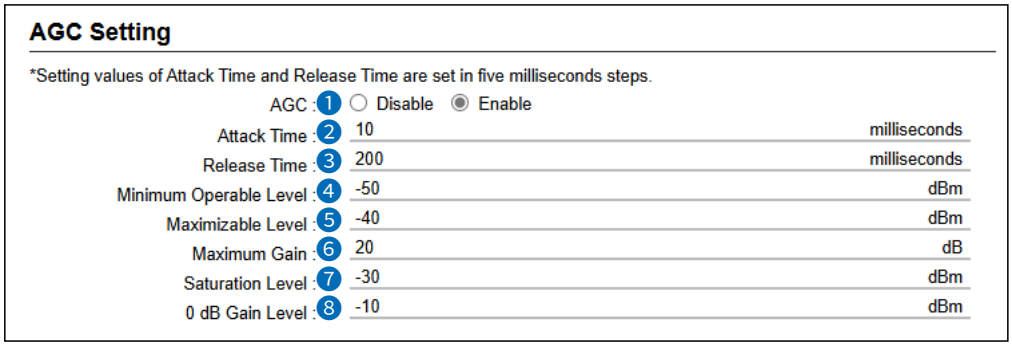

❶AGC ..... Select “Enable” to use the AGC function.
If enabled, set the details for the function. (Default: Disable)

❷Attack Time ..... Enter the attack time. It is the delay time before the AGC function turns ON after an audio signal is received through the network. (Default: 10)
• Range: 5 ~ 300 (milliseconds) in 5 millisecond steps

❸Release Time ..... Set the release time. It is the delay time for the AGC function to turn it OFF after no audio signal is received through the network.
(Default: 200)
• Range: 5 ~ 700 (milliseconds) in 5 millisecond steps

❹Minimum Operable Level... Set the minimum audio signal level. The AGC function does not work below this value. (Default: –50)
• Range: –70 ~ –40 (dBm)

❺Maximizable Level..... Set the AGC reference level. The AGC function adjusts the audio gain to to keep this audio level. (Default: –40)
• Range: –60 ~ –20 (dBm)

❻Maximum Gain ..... Set the maximum audio gain. (Default: 20)
• Range: 0 ~ 40 (dB)

❼Saturation Level..... Set the gain inversion level. Below this input level, the maximum operating gain is maintained, and if the input level exceeds this value, the gain is reduced.
(Default: –30)
• Range: –50 ~ –10 (dBm)

❽0 dB Gain Level ..... Sets the audio input level at which the AGC function adjusts the gain to 0 dB. (Default: –10)
• Range: –10 ~ 20 (dBm)

Converter Bridge screen

PBX Extension > Converter Bridge

■ Notice Tone on the Telephone

Sets the details on the notification to SIP phones when a call has arrived on a Converter Bridge port of the RoIP gateway.

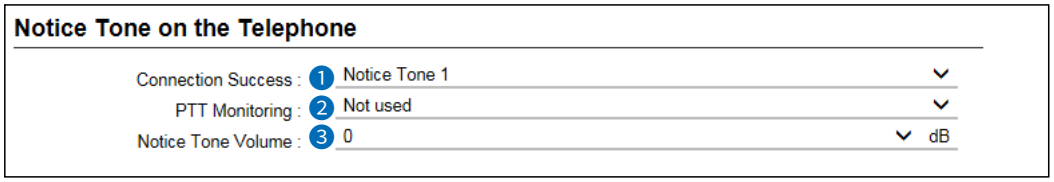

❶Connection Success …… Select a Notice Tone to notify a SIP phone that a call has arrived on the transceiver controller, and the SIP phone is ready to transmit.
(Default: Notice Tone 1)

- **Not used**: Does not send a Notice Tone
- **Notice Tone 1 ~ 3**: Sends the selected Notice Tone

❷PTT Monitoring …… Select a Notice Tone to alert you to switch receiving and transmitting.
(Default: Not used)

- **Not used**: Does not send a Notice Tone
- **Notice Tone 1 ~ 3**: Sends the selected Notice Tone

❸Notice Tone Volume …… Set the volume level of the Notice Tones (❶ ~ ❷). (Default: 0)

- Range: –12 (minimum) ~ +6 (maximum) (dB)

Converter Bridge screen

PBX Extension > Converter Bridge

■ Release Timer

Sets the timers for canceling or disconnecting a call.

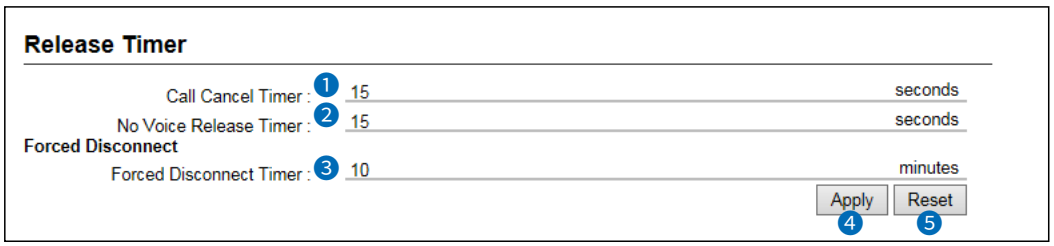

1 Call Cancel Timer ..... Enter the period of time to cancel the call. When the set time has passed without a response from the SIP phone, the call is canceled. (Default: 15)

- Range: 0 (OFF) or 5 ~ 60 (seconds)

2 No Voice Release Timer ... Enter the period of time to stop transmitting. When the set time has passed with no audio signal, transmitting is stopped. (Default: 15)

- Range: 0 (OFF) or 5 ~ 600 (seconds)

3 Forced Disconnect Timer Enter the period of time to be forcibly stop transmitting. When the set time has passed, transmitting is stopped, even when the communication is ongoing. (Default: 10)

- Range: 0 (OFF) or 5 ~ 120 (minutes)

4 <Apply> ..... Click to apply the setting.

5 <Reset> ..... Click to reset the setting.

ⓘ You cannot reset after clicking <Apply>.

PBX ADVANCED SETTINGS

Section 14

Advanced Settings screen 14-2
- ■ SIP Settings 14-2
- ■ VoIP Settings 14-4

Prioritization screen 14-11
- ■ EXT Output Port Prioritization 14-11
- ■ Caller Prioritization 14-12
- ■ List of Caller Prioritization Entries 14-14

Numbering Plan screen 14-15
- ■ Phone Number Routing Settings 14-15
- ■ List of Phone Number Routing Settings 14-16
- ■ Exception Outbound Phone Number 14-17
- ■ Outbound Phone Number Reformatting Settings 14-18
- ■ List of Outbound Phone Number Reformatting Settings 14-19
- ■ Outbound Call Restriction Rule Settings 14-20
- ■ List of Outbound Call Restriction Rule Settings 14-21

Outside Line Regulation screen 14-22
- ■ Outside Line Regulation 14-22

External Call Limiting screen 14-23
- ■ Overall Limitation 14-23
- ■ Limitation for each Outside Line 14-24

IP Authenticated Extension screen 14-25
- ■ IP Authenticated Extension (Pre-registered Extension) 14-25
- ■ List of IP Authenticated Extension 14-26

Caller Number Reformatting screen 14-27
- ■ Source Line Settings 14-27
- ■ Caller Number Reformatting Settings 14-28
- ■ List of Caller Number Reformatting Settings 14-29

DID screen 14-30
- ■ DID Allocation 14-30
- ■ DID Settings 14-31
- ■ List of DID settings 14-32

Advanced Settings screen

PBX Advanced Settings > Advanced Settings

■ SIP Settings

The common settings for the terminals to the RoIP gateway.

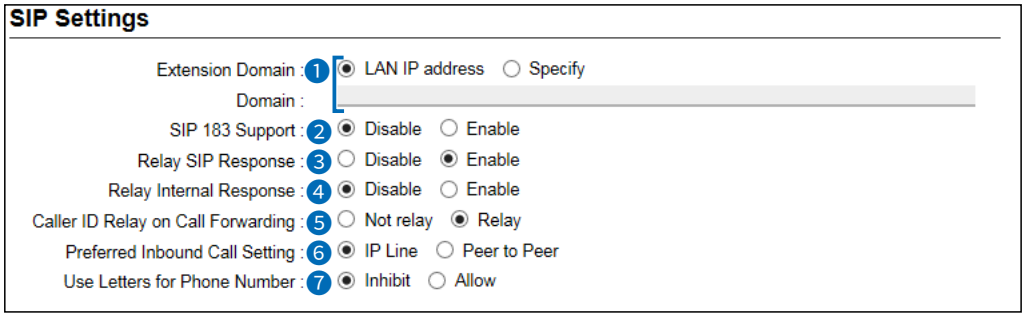

❶ Extension Domain ..... You can enter a SIP service domain name of up to 63 characters, to commonly use between the local SIP server and its client SIP phones. (Default: LAN IP address)

ⓘ Enter a unique Extension Domain in an IP telephone network. The IP address of the RoIP gateway is recommended for your Extension Domain name to prevent a conflict in domain names.

ⓘ Enter this value in the “SIP service domain” setting in the client telephone settings.

❷ SIP 183 Support ..... Enable this option if you want to use the 183 Session Progress. (Default: Disable)

The 183 Session Progress response indicates that information about the call state is present in the message body media information (SDP).

ⓘ When this option is enabled, the 183 session progress is transferred to a client SIP phone.

❸ Relay SIP Response ..... Set whether or not to relay an error message received from an upstream SIP server when a call is outgoing. (Default: Enable)

- **Enable**: Relays an error response (4xx ~ 6xx) from the SIP server.
- **Disable**: Translates an error response (4xx ~ 6xx) into a 486 response and relays it.

ⓘ Enable this setting if you want to use a slide outgoing function by connecting another SIP server to this RoIP gateway as a simple relay client device.

Advanced Settings screen

PBX Advanced Settings > Advanced Settings

■ SIP Settings

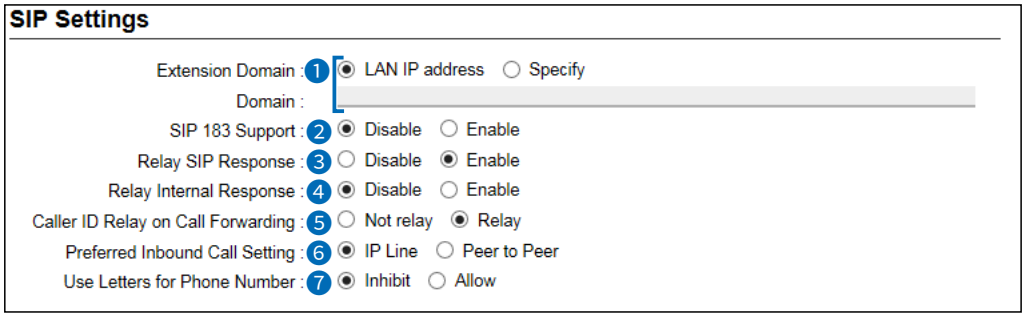

4 Relay Internal Response … Set whether or not to relay an error message received from a client SIP phone, when a call is incoming. (Default: Disable)

- **Enable**: Relays an error response (4xx ~ 6xx) from the SIP phone.
- **Disable**: Translates an error response (4xx ~ 6xx) into a 486 response and relays it.

5 Caller ID Relay on Call Forwarding …… Set whether or not to relay the original caller number of a forwarded call by using the Blind Transfer function. (Default: Relay)

- **Not relay**: Your number is shown at the forwarded destination.
- **Relay**: The original caller number is shown at the forwarded destination.

6 Preferred Inbound Call Setting …… Set which line to consider when the SIP URI of an incoming call over the IP line conflicts with the SIP URI of a Peer to Peer line. (Default: IP Line)

7 Use Letters for Phone Number…… If allowed, you can enter letters as a phone number. (Default: Inhibit)

Advanced Settings screen

PBX Advanced Settings > Advanced Settings

■ VoIP Settings

Sets the audio quality for SIP phones. The setting items vary, depending on the TOS Type.

TOS Type: Not Used

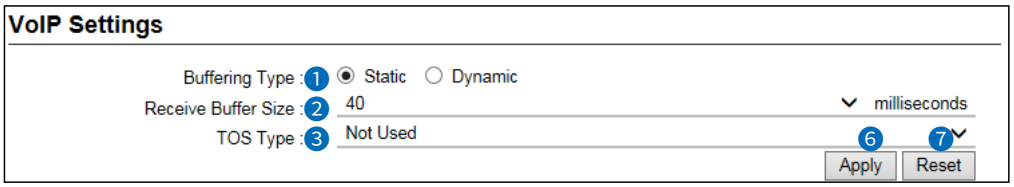

TOS Type: TOS

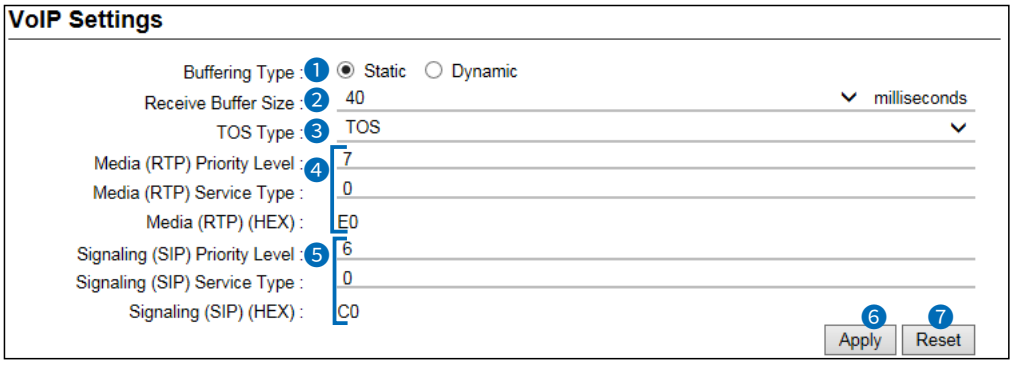

TOS Type: Diffserv

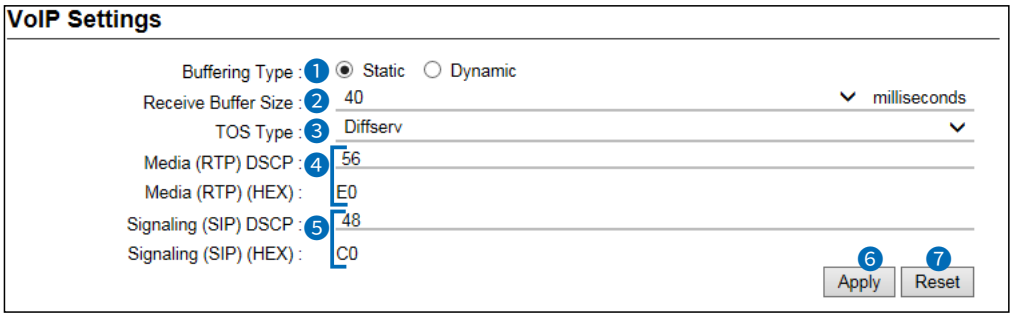

ⓘ The screens above show when the Buffering Type (❶) is set to “Static”

❶ Buffering Type ..... Select the jitter buffer used to reduce speech break up due to packet fluctuations. (Default: Dynamic)

- **Static**: Buffers receive voice data for a set period of time in the Receive Buffer Size (❷).
- **Dynamic**: Buffering time of the received voice data varies, according to the packet fluctuation status.

Advanced Settings screen

PBX Advanced Settings > Advanced Settings

■ VoIP Settings

TOS Type: Not Used

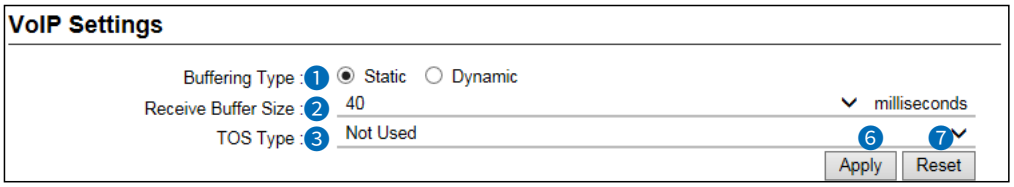

TOS Type: TOS

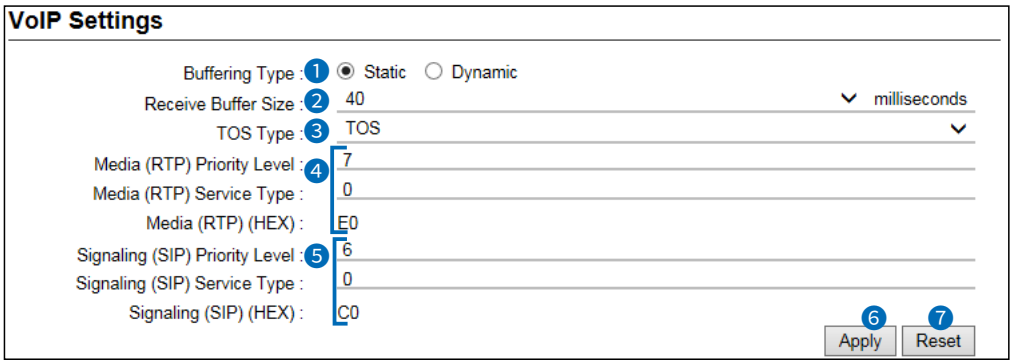

TOS Type: Diffserv

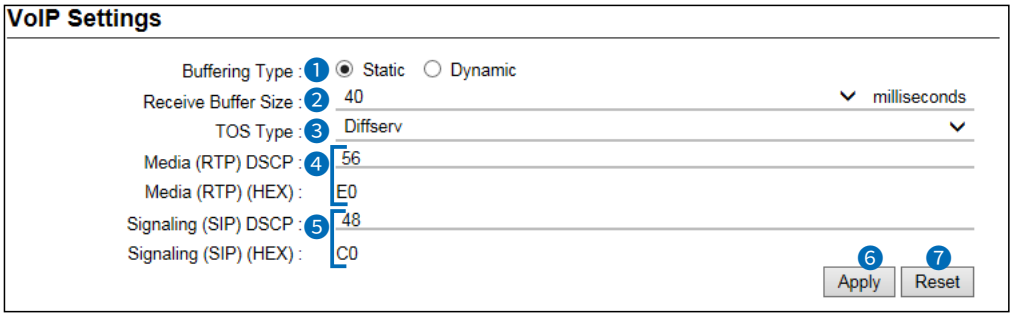

ⓘ The screens above show when the Buffering Type (❶) is set to “Static”

❷ Receive Buffer Size ..... Displayed only when Buffering Type (❶) is set to “Static.”
Set the period of time to buffer the received voice data. (Default: 40)
- Range: 20 ~ 1000 (milliseconds)

ⓘ The shorter the time you set, the less the delay, however the more the sound will be interrupted.

Advanced Settings screen

PBX Advanced Settings > Advanced Settings

■ VoIP Settings

TOS Type: Not Used

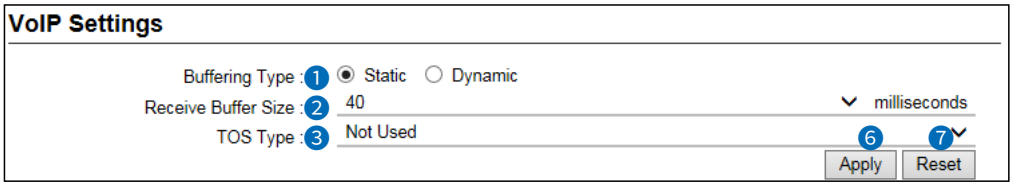

TOS Type: TOS

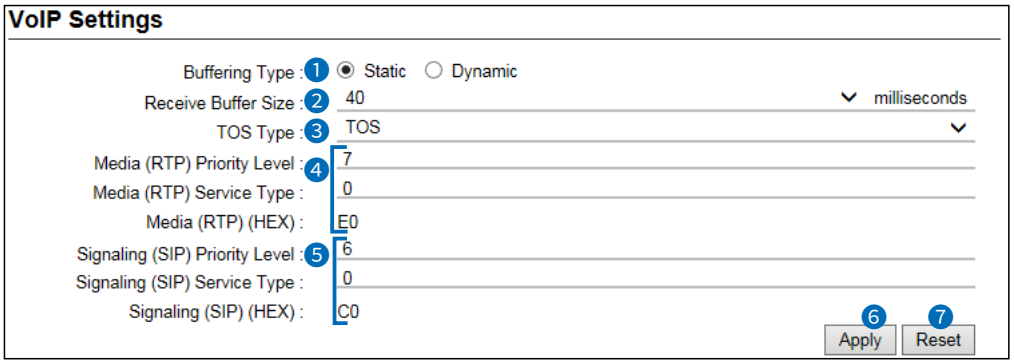

TOS Type: Diffserv

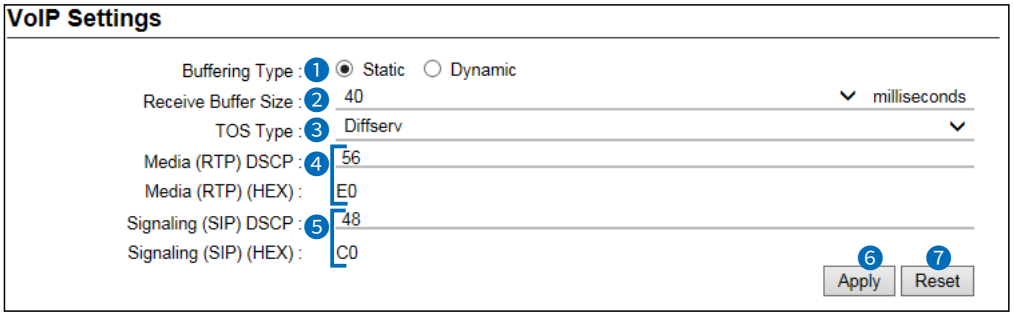

ⓘ The screens above show when the Buffering Type (❶) is set to “Static”

❸ TOS Type …… Set TOS Type. (Default: TOS)

- **Not Used**: Does not use the TOS function.
- **TOS**: Outputs the VoIP packet to the TOS field (8 bit) in the IP header, in the TOS (Type Of Service) format.

ⓘ TOS format applies RFC1349.

- The first 3 bits: Shows the priority.
  Set into “Media (RTP) Priority Level” (❹) with a decimal number.
- The next 4 bits: Shows the service type.
  Set into “Media (RTP) Service Type” (❹) with a decimal number.
  The larger number, the higher priority.
- The last 1 bit: Reserved and fixed to “0.”

Advanced Settings screen

PBX Advanced Settings > Advanced Settings

■ VoIP Settings

TOS Type: Not Used

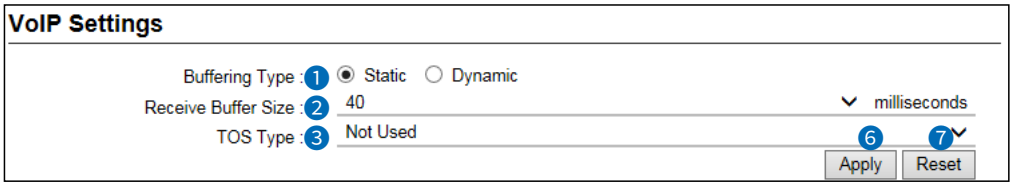

TOS Type: TOS

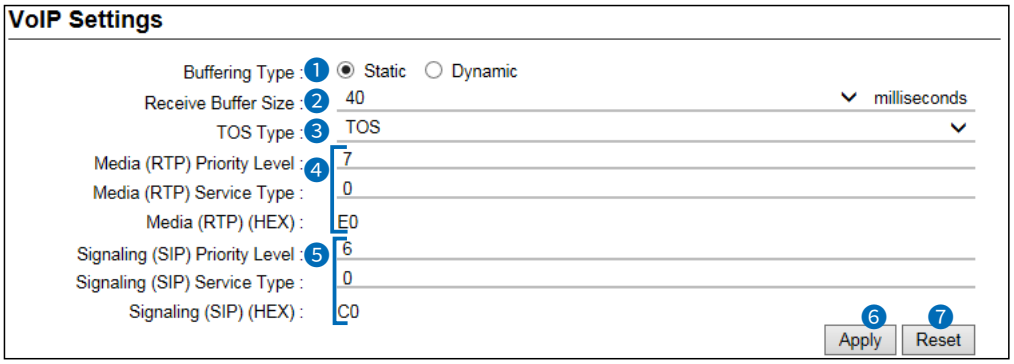

TOS Type: Diffserv

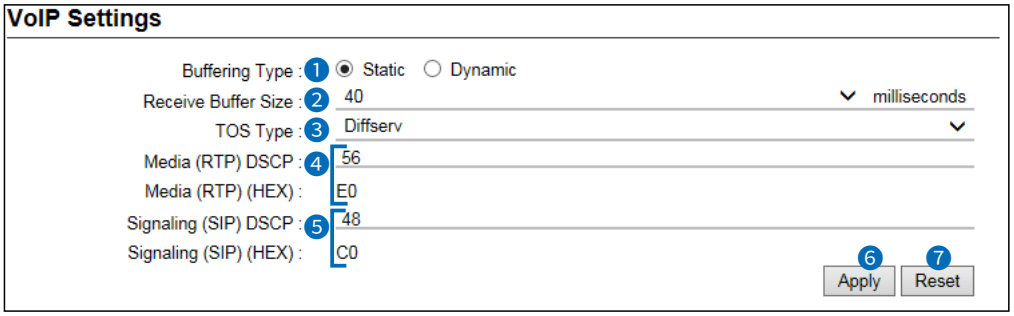

ⓘ The screens above show when the Buffering Type (❶) is set to “Static”

❸TOS Type (Continued) ..... **Diffserv**: Outputs the VoIP packet to the TOS field (8 bit) in the IP header, in the Diffserv (Differentiated Service) format.

ⓘ The Diffserv format details:

- The former 6 bits: Shows the DSCP.
  Set “Media (RTP) DSCP” (❹) with a decimal number.
  The larger number, the higher priority.
- The next 2 bits: Reserved and fixed to “0.”

Advanced Settings screen

PBX Advanced Settings > Advanced Settings

■ VoIP Settings

TOS Type: Not Used

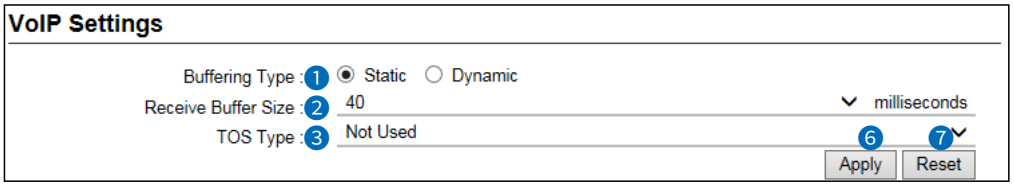

TOS Type: TOS

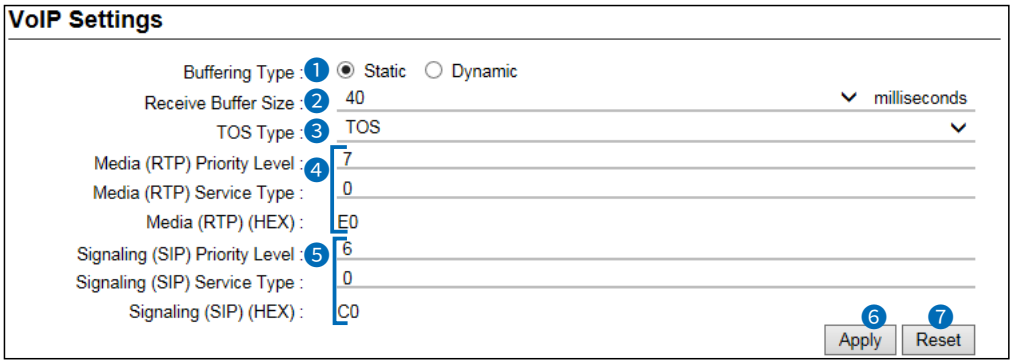

TOS Type: Diffserv

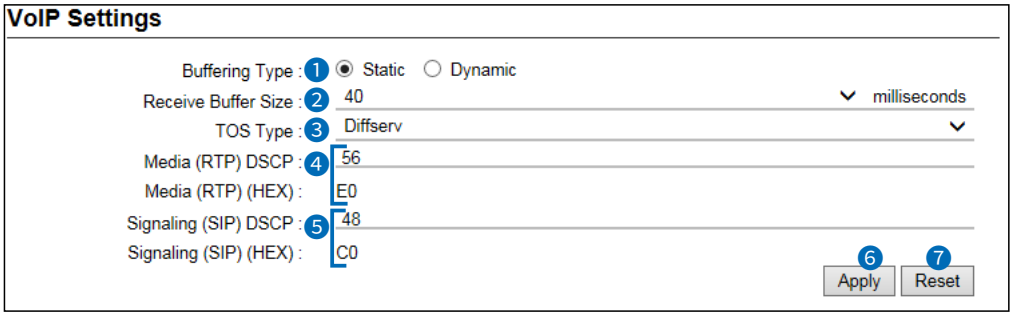

ⓘ The screens above show when the Buffering Type (❶) is set to “Static”

❹ **Media (RTP)**..... Setting the Priority details for the TOS or Diffserv format options.

- **Priority Level**: Set the value of the priority level for TOS. (Default: 7)
  Range: 0 ~ 7 (in decimal)
- **Service Type**: Set the value of the service type for TOS. (Default: 0)
  Range: 0 ~15 (in decimal)
- **DSCP**: Set the value of DSCP (Differentiated Services Code Point) for Diffserv. (Default: 56)
  Range: 0 ~ 63 (in decimal)

Advanced Settings screen

PBX Advanced Settings > Advanced Settings

■ VoIP Settings

TOS Type: Not Used

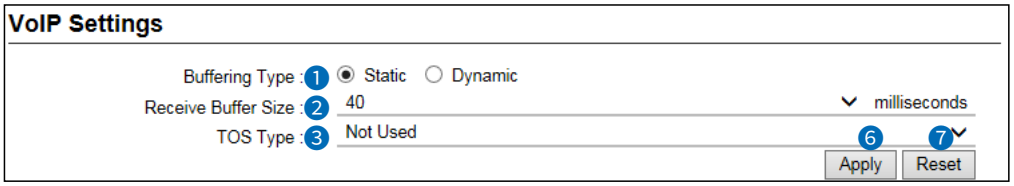

TOS Type: TOS

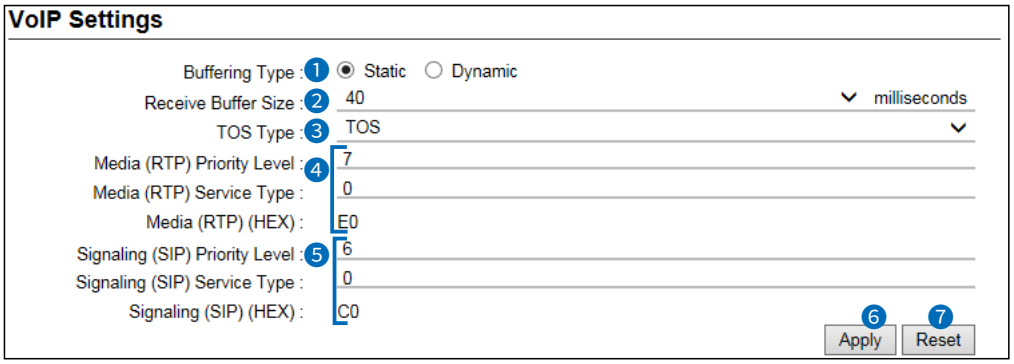

TOS Type: Diffserv

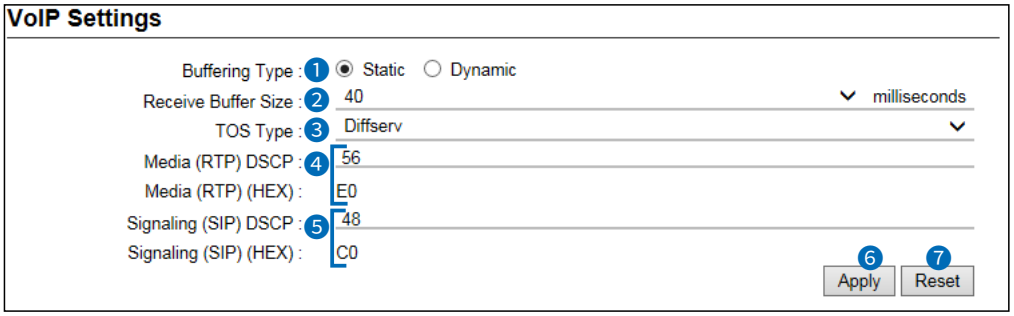

ⓘ The screens above show when the Buffering Type (❶) is set to “Static”

❺ Signaling (SIP) …… Setting the Priority options for VoIP packets that are output to the TOS field.

- **Priority Level**: Set the value of the priority level for TOS. (Default: 6)
  Range: 0 ~ 7 (in decimal)
  The larger number, the higher priority.
- **Service Type**: Set the value of the service type for TOS. (Default: 0)
  Range: 0 ~15 (in decimal)
- **DSCP**: Set the value of DSCP (Differentiated Services Code Point) for Diffserv. (Default: 48)
  Range: 0 ~ 63 (in decimal)

Advanced Settings screen

PBX Advanced Settings > Advanced Settings

■ VoIP Settings

TOS Type: Not Used

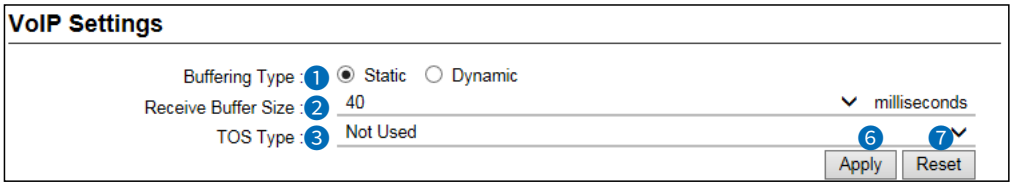

TOS Type: TOS

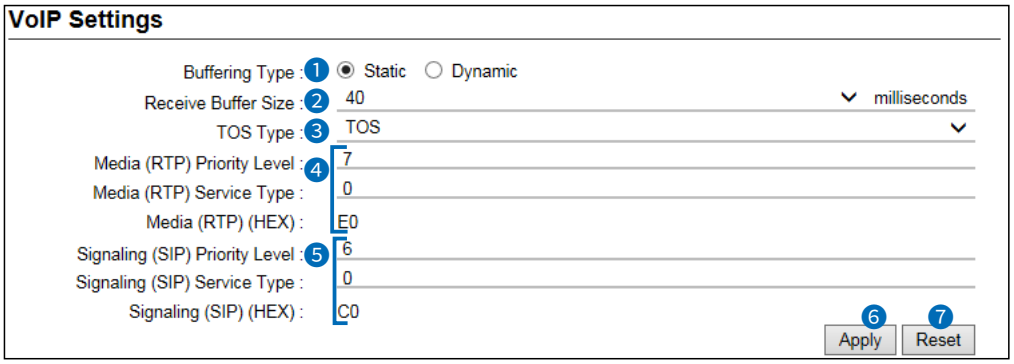

TOS Type: Diffserv

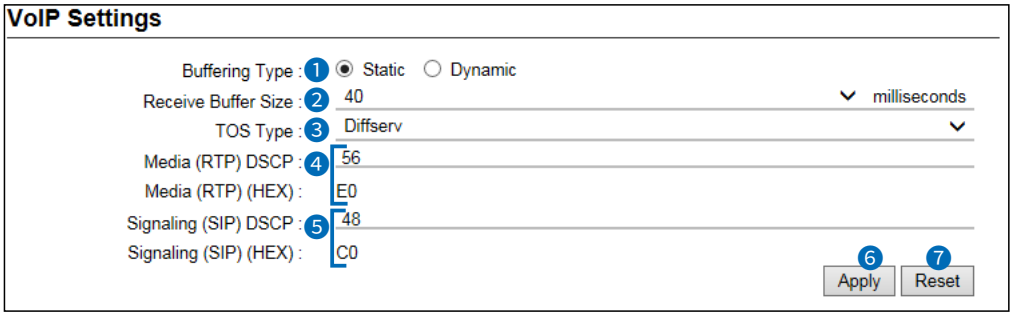

ⓘ The screens above show when the Buffering Type (❶) is set to “Static”

❻ **<Apply>** ..... Click to apply the setting.

❼ **<Reset>** ..... Click to reset the setting.
ⓘ You cannot reset after clicking <Apply>.

Prioritization screen

PBX Advanced Settings > Prioritization

■ EXT Output Port Prioritization

Set the priority of incoming calls from SIP phones or external devices.

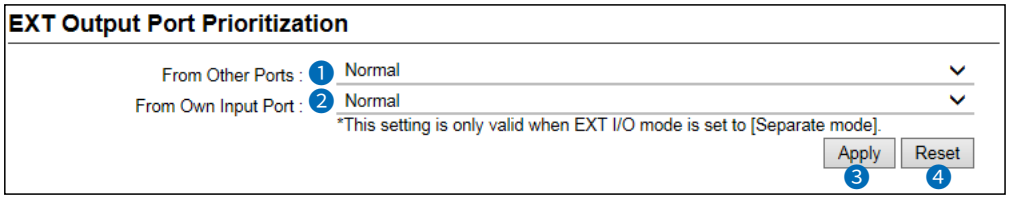

❶From Other Ports ..... Set the priority of Incoming calls arrived at other ports than the EXT I/O (1 ~ 4) ports. (Default: Normal)
- Options: Normal, Priority, or High Priority

❷From Own Input Port ..... Set the priority of Incoming calls from the devices those are connected to the EXT I/O (1 ~ 4) ports on this RoIP Gateway. (Default: Normal)
This setting is only valid when EXT I/O mode is set to “Separate mode.”
- Options: Normal, Priority, or High Priority

❸<Apply> ..... Click to apply the entries.

❹<Reset> ..... Click to reset the entries.
ⓘ You cannot reset after clicking <Apply>.

Prioritization screen

PBX Advanced Settings > Prioritization

■ Caller Prioritization

Set the priority of incoming calls from SIP phones or external devices. When a call from the specified SIP phone has arrived while you are talking on another call, the RoIP gateway terminates the current call to catch the arrived call.
The priority of calls from other than the specified SIP phone depends on the Priority Level (❺) setting.

Called via: SIP Server

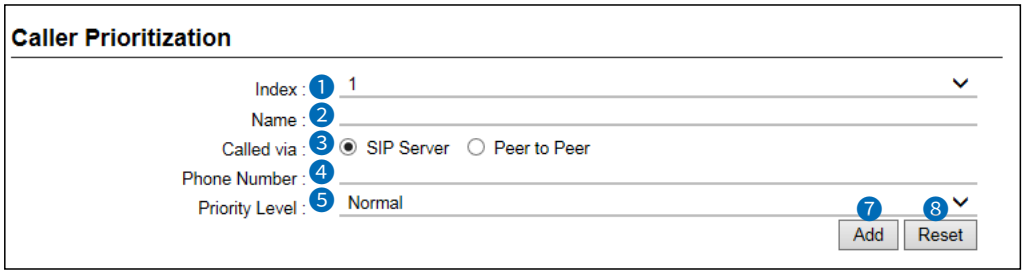

Called via: Peer to Peer

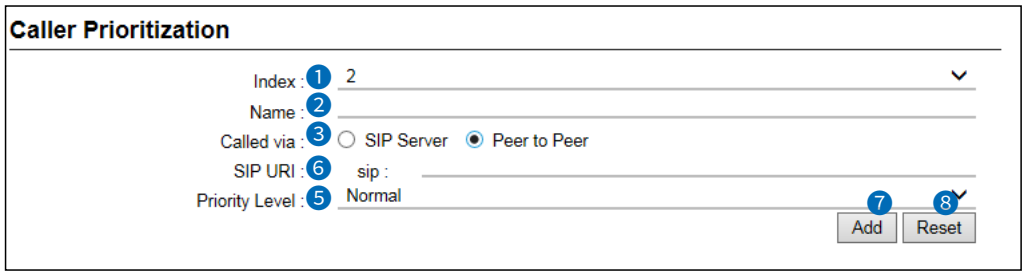

❶ Index ..... Select a number.
- Range: 1 ~20

❷ Name ..... Enter a caller's name of up to 31 characters.

❸ Called via ..... Select the line type of an incoming call.
- **SIP Server**: Through an IP line.
- **Peer to Peer**: Peer to Peer

❹ Phone Number ..... Displayed when Called via (❸) is set to "SIP Server."
Enter a caller's Phone Number of up to 31 digits.

Prioritization screen

PBX Advanced Settings > Prioritization

■ Caller Prioritization

Called via: SIP Server

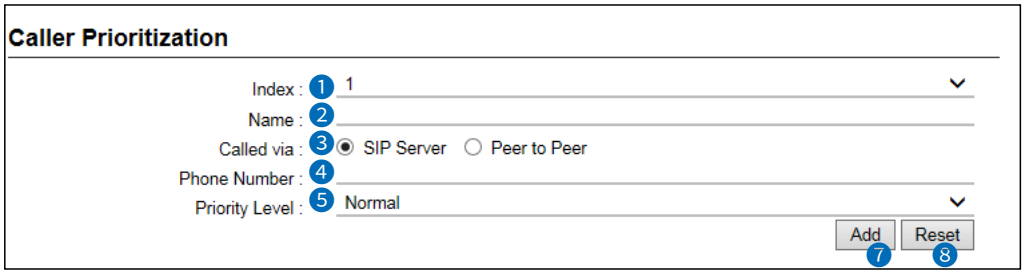

Called via: Peer to Peer

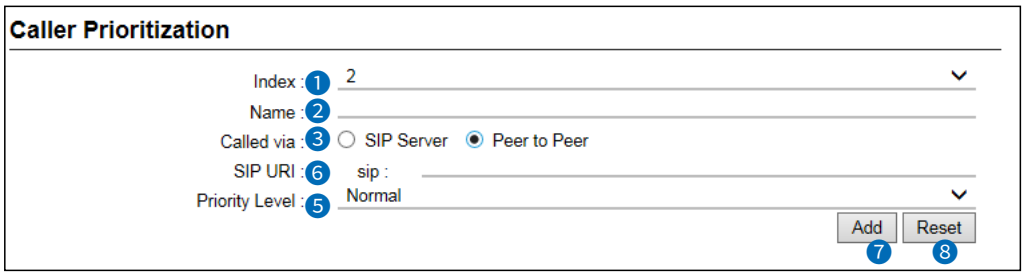

❺ Priority Level ..... Set the priority of the destination. (Default: Normal)

- Options: Normal, Priority, or High Priority

ⓘ When a call from the prior IP phone arrives while you are talking on another call, the current call is terminated and a Ring Tone will ring to alert you a prior call is incoming.
When a call from the same priority as the current call, the current request will stay connected.

ⓘ An emergency call has priority over all other calls.

❻ SIP URI ..... Displayed when Called via (❸) is set to “Peer to Peer.”
Enter the caller’s SIP URI of up to 63 characters.

❼ <Add> ..... Click to add the entries.

❽ <Reset> ..... Click to reset the entries.

ⓘ You cannot reset after clicking <Apply>.

Prioritization screen

PBX Advanced Settings > Prioritization

■ List of Caller Prioritization Entries

The list of the entries into the Caller Prioritization.

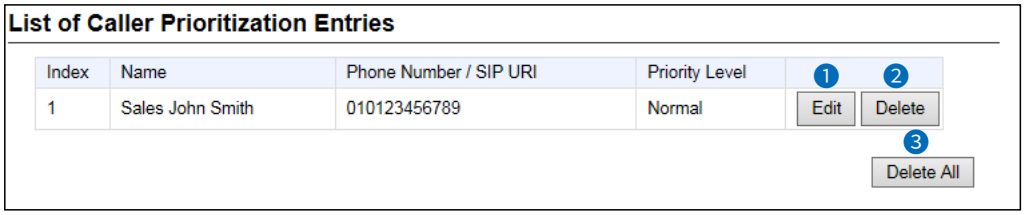

❶ **<Edit>** ..... Click to edit an entry.

❷ **<Delete>** ..... Click to delete an entry.

❸ **<Delete All>** ..... Click to delete all the entries.
ⓘ You cannot restore after clicking <Delete All>.

Numbering Plan screen

PBX Advanced Settings > Numbering Plan

■ Phone Number Routing Settings

Set the Routing rules.

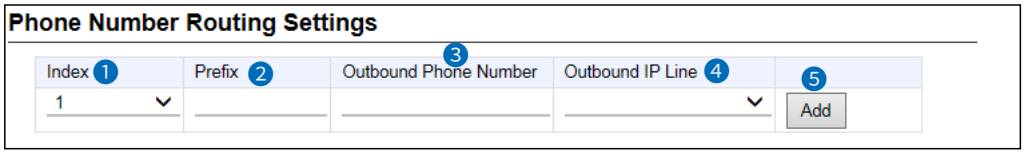

1 Index ..... Enter an index number of the Routing rule up to 400 entries.

2 Prefix ..... Enter a Prefix of the phone number of up to 7 digits. The entered prefix will be deleted when the RoIP gateway dials outbound using the Outbound IP Line (4).

ⓘ You can also set the prefix of the phone number in the “External Call Routing Number” (PBX > Special Number > External Call Routing Number)

3 Outbound Phone Number Enter the specified phone number of up to 15 digits. When a phone number that starts with the specified number is dialed, the RoIP gateway will call outbound using the Outbound IP Line (4).

4 Outbound IP Line ..... Select from the phone numbers that are entered on the “IP Line” screen.

5 <Add> ..... Click to add the entry.

Numbering Plan screen

PBX Advanced Settings > Numbering Plan

■ List of Phone Number Routing Settings

Displays the list of entries into the Phone Number Routing Settings.

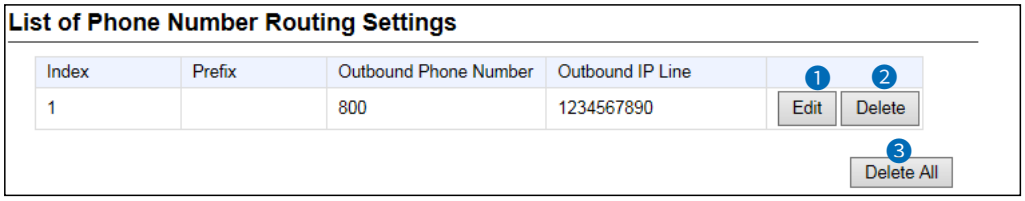

❶ **<Edit>** ..... Click to edit an entry.

❷ **<Delete>** ..... Click to delete an entry.

❸ **<Delete All>** ..... Click to delete all the entries.
ⓘ You cannot restore after clicking <Delete All>.

Numbering Plan screen

PBX Advanced Settings > Numbering Plan

■ Exception Outbound Phone Number

Enter external phone numbers to exclude from applying Outbound Call Restriction Rule or Phone Number Reformatting rule.

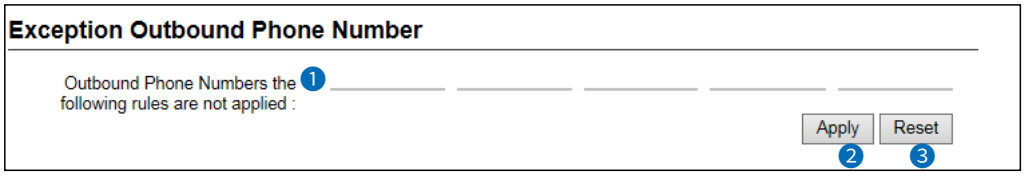

❶ Outbound Phone Numbers the following rules are not applied…… Enter up to 5 special numbers. When an external phone number, that starts with either of these numbers, is dialed, the digits of the special number are excluded from applying the Outbound Call Restriction Rule or Phone Number Reformatting rule.

❷ <Apply> …… Click to apply the entries.

❸ <Reset> …… Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Numbering Plan screen

PBX Advanced Settings > Numbering Plan

■ Outbound Phone Number Reformatting Settings

Enter external phone numbers that apply or do not apply the phone number reformatting rules.
The Reformatting rules are applied only for outbound calls.

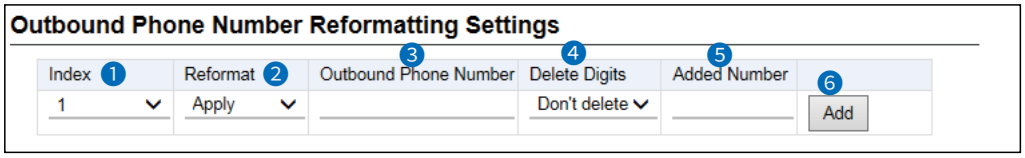

❶ Index ..... Enter the order for Number Reformatting operation.
- Range: 1 ~ 100

❷ Reformat ..... Set whether or not to reformat the dialed number if a matched number is dialed. (Default: Apply)
- **Apply**: Reformats the number according to the rule.
- **Exception**: Does not reformat the number.

ⓘ The “Exception” rules have priority over the “Apply” rules.

❸ Outbound Phone Number Enter the beginning of an outbound phone number of up to 15 digits. When an outbound phone number that starts with the specified number is dialed, the RoIP gateway applies the Number Reformatting. (Default: Blank)

❹ Delete Digits ..... Enter a number of digits if you want to delete specified digits at the beginning of the dialed number. (Default: Don’t delete)
- Range: Don’t delete, or 1 ~ 15

❺ Added Number ..... Enter a number that you want to add at the beginning of the dialed number of up to 15 digits. (Default: Blank)

❻ <Add> ..... Click to add the entries.

Number Reformatting examples:

❍ Example 1
- Outbound Phone Number (❸): 987
- Delete Digits (❹) : Don’t delete
- Added Number (❺) : 800

Dialed number: 98765432

Reformatted to: 80098765432

❍ Example 2
- Outbound Phone Number (❸): 0006
- Delete Digits (❹) : 3
- Added Number (❺) : 800987

Dialed number: 00065432

Reformatted to: 80098765432

Numbering Plan screen

PBX Advanced Settings > Numbering Plan

■ List of Outbound Phone Number Reformatting Settings

The list of entered rules into Outbound Phone Number Reformatting Settings.

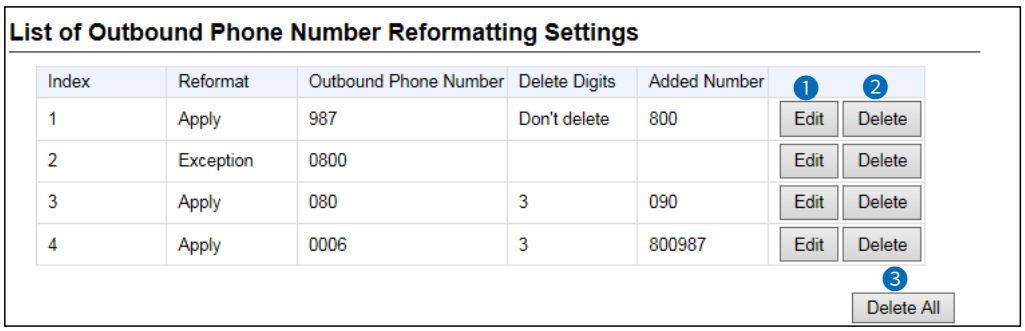

❶ **<Edit>** ..... Click to edit an entry.

❷ **<Delete>** ..... Click to delete an entry.

❸ **<Delete All>** ..... Click to delete all the entries.
ⓘ You cannot restore after clicking <Delete All>.

Numbering Plan screen

PBX Advanced Settings > Numbering Plan

■ Outbound Call Restriction Rule Settings

Enter destination phone numbers to restrict or to apply to call.

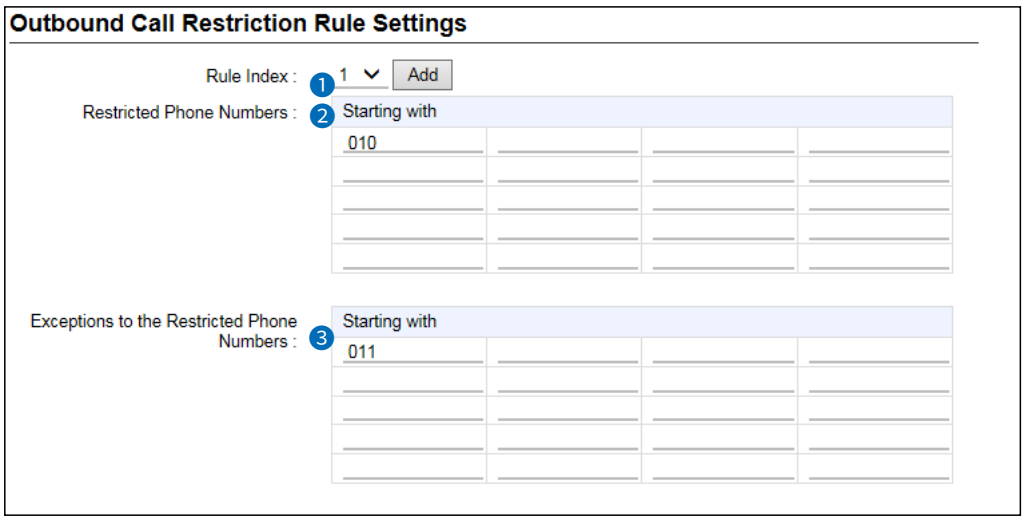

❶ Rule Index .....

You can set restriction rules to each Extension Group (PBX > Extension Group.)
Select a group to apply the restriction rules. (Default: Common)
- **Common**: Applies all the groups.
- **1 ~ 16**: Applies individual groups.

Click <Add> to add the entered rule to the List of Extension Group Entries.

❷ Restricted Phone Numbers

Enter external phone numbers of up to 15 digits to restrict to outbound calls when the dialed number matches them. (Default: Blank)
You can enter up to 20 numbers to each Rule Index (❶).

❸ Exceptions to the Restricted Phone Numbers

Enter external phone numbers of up to 15 digits to apply to outbound calls when the dialed number matches them. (Default: Blank)
You can enter up to 20 numbers to each Rule Index (❶).

Numbering Plan screen

PBX Advanced Settings > Numbering Plan

■ List of Outbound Call Restriction Rule Settings

The list of entered rules into Outbound Call Restriction Rule Settings.

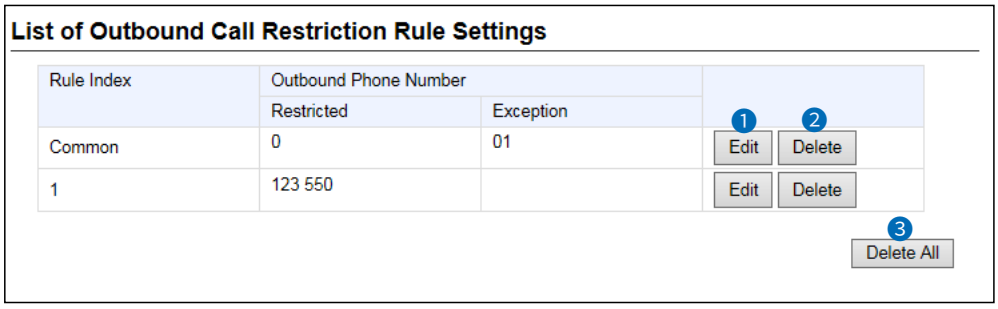

❶ **<Edit>** ..... Click to edit an entry.

❷ **<Delete>** ..... Click to delete an entry.

❸ **<Delete All>** ..... Click to delete all the entries.
ⓘ You cannot restore after clicking <Delete All>.

Outside Line Regulation screen

PBX Advanced Settings > Outside Line Regulation

■ Outside Line Regulation

Set the External line. The outbound call management rules can be applied to this setting.

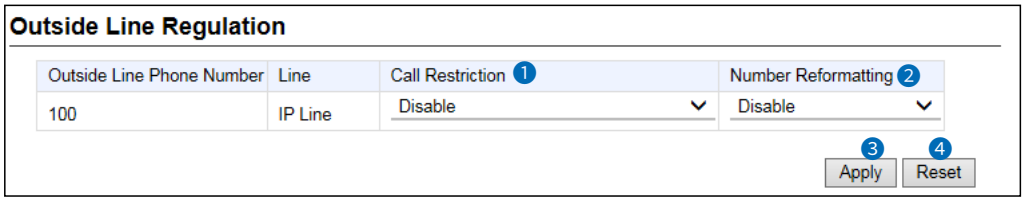

1 Call Restriction ..... Restricts outbound calls for the selected phone line (number). (Default: Disable)

- **Disable**: Does not restrict outbound calls.
- **Call Restriction Rule 1 ~ 16**: Restricts outbound calls according to the selected rule that is set in “Outbound Call Restriction Rule Settings” in addition to the “Call Restriction” setting in the “Telephone Common Settings”.
- **External Call Restriction**: Restricts outbound calls, excluding Peer to Peer calls.

2 Number Reformatting ..... Set whether or not to reformat dialed number. (Default: Disable)
If enabled, dialed external numbers are reformatted, according to the rules set in “Outbound Phone Number Reformatting Settings.” (PBX Advanced Settings > Numbering Plan > List of Outbound Phone Number Reformatting Settings)

3 <Apply> ..... Click to apply the entries.

4 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

External Call Limiting screen

PBX Advanced Settings > External Call Limiting

■ Overall Limitation

Set the limit number of the usable outside lines (phone numbers) simultaneously, according to the whole lines connected to the RoIP gateway.

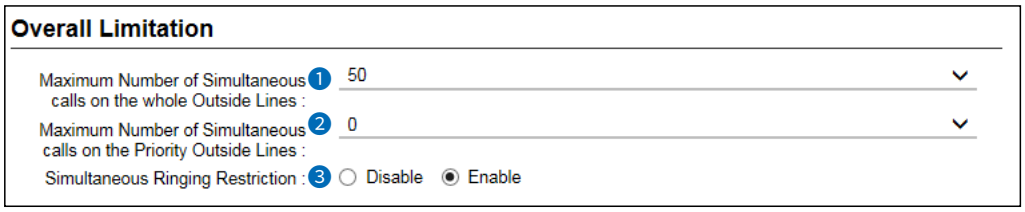

❶ Maximum Number of Simultaneous calls on the whole Outside Lines

Set the maximum number of external lines that can simultaneously make. If more calls are inbound or outbound than the value of this setting, they will be busy. (Default: 50)

- Range: 1 ~ 50

❷ Maximum Number of Simultaneous calls on the Priority Outside Lines

Set the maximum number of lines to reserved for Priority Calls. (Default: 0)

- Range: 0 ~ 50

ⓘ The number of Normal Outside Lines (non-priority lines) is the value obtained by subtracting the number of Priority Outside Line from the total number of external lines.

❸ Simultaneous Ringing Restriction .....

Leave as default for the normal use.
You can temporarily restrict incoming calls when there is a concentration of incoming calls. (Default: Enable)

External Call Limiting screen

PBX Advanced Settings > External Call Limiting

■ Limitation for each Outside Line

Set the limitation and prioritization settings for each outside line (phone number).

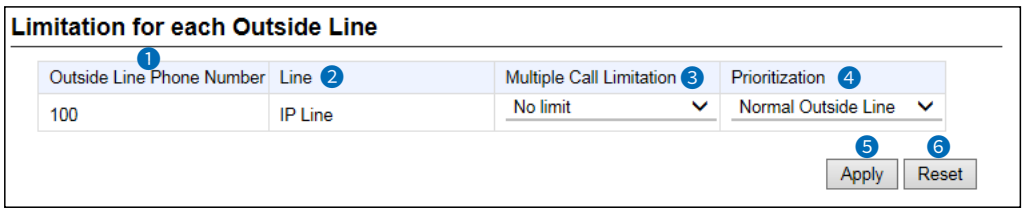

1 Outside Line Phone Number — Displays the phone numbers in “List of SIP Server Entries.”

2 Line ..... Displays the type of phone line.

3 Multiple Call Limitation ... Sets the maximum number of calls you can simultaneously make on the phone line. (Default: No limit)
- Range: No limit, or 1 ~ 50

4 Prioritization ..... Select the Prioritization of the line. Priority Outside Line means reserved for Priority Calls. (Default: Normal Outside Line)
ⓘ The number of Normal Outside Lines (non-priority lines) is the value obtained by subtracting the number of Priority Outside Line from the total number of external phone lines.

5 <Apply> ..... Click to apply the entries.

6 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

IP Authenticated Extension screen

PBX Advanced Settings > IP Authenticated Extension

■ IP Authenticated Extension (Pre-registered Extension)

Setting for the gateway connection of the RoIP gateway.
ⓘ These settings are for only the special system environment. Leave as default for the normal use.

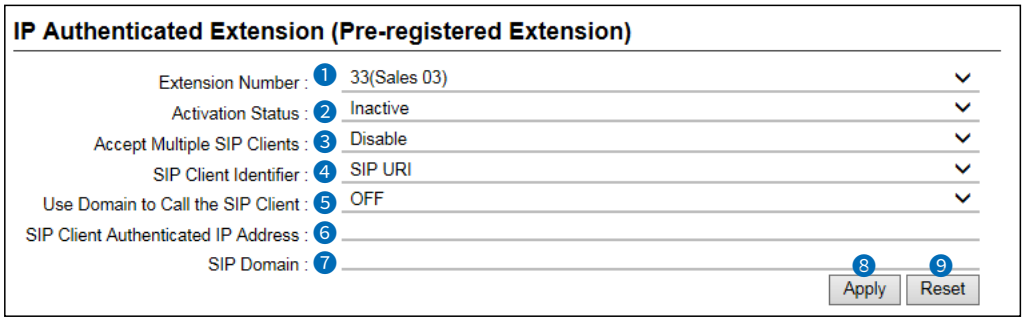

❶ Extension Number..... Select an Extension number to use the gateway connection.

❷ Activation Status ..... Enables the Gateway Connection function of the RoIP gateway. If enabled, an extension can communicate without registering to the RoIP gateway under the special condition. (Default: Inactive)

❸ Accept Multiple SIP Clients Enables to use the multiple gateway connections. (Default: Disable)

❹ SIP Client Identifier ..... Select how to identify the SIP Client. (Default: SIP URI)
• Options: SIP URI or Display Name

❺ Use Domain to Call the SIP Client ..... Set whether or not to use a specified domain to make a call through the gateway connection. (Default: OFF)
When using the IP address of this RoIP gateway, set this item to “OFF.”

❻ SIP Client Authenticated IP Address ..... Enter the IP address of the target device when you use the gateway connections.

❼ SIP Domain ..... Enter the domain name of up to 63 characters or the IP address of the target device, that are used to authenticate the caller through the gateway connection.

❽ <Apply> ..... Click to apply the entries.

❾ <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

IP Authenticated Extension screen

PBX Advanced Settings > IP Authenticated Extension

■ List of IP Authenticated Extension

The list of entered IP Authenticated Extension.

List of IP Authenticated Extension

Index	Name	Extension Number	IP Authenticated Extension	SIP Client Authenticated IP Address	SIP Domain
1	Sales 01	31	Enable	[redacted]	[redacted]
2	Sales 02	32	Enable	[redacted]	[redacted]
3	Sales 03	33	Disable		
4	Sales 04	34	Disable		

• Select an Extension Number in the “IP Authenticated Extension (Pre-registered Extension)” to edit the entry.

Caller Number Reformatting screen

PBX Advanced Settings > Caller Number Reformatting

■ Source Line Settings

Set the rules to reformatting Caller IDs of incoming call.

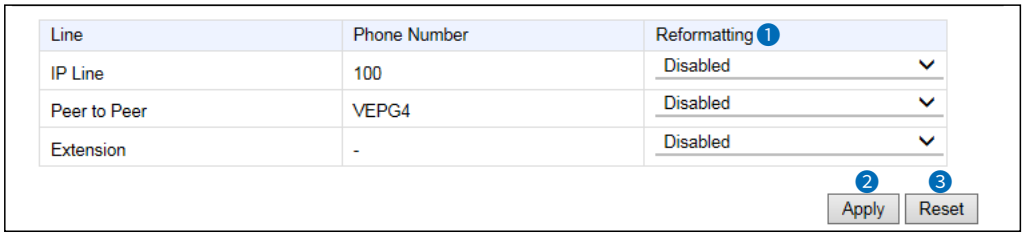

1 Reformatting ..... Set whether or not to reformat for each Caller Number.
(Default: Disabled)

ⓘ The “Extension” rule is applied for incoming call from extensions that are registered to the same SIP server (VE-PG4).

2 <Apply> ..... Click to apply the entries.

3 <Reset> ..... Click to reset the settings.

ⓘ You cannot reset after clicking <Apply>.

Caller Number Reformatting screen

PBX Advanced Settings > Caller Number Reformatting

■ Caller Number Reformatting Settings

Set the Caller IDs that are applied the reformatting rules.

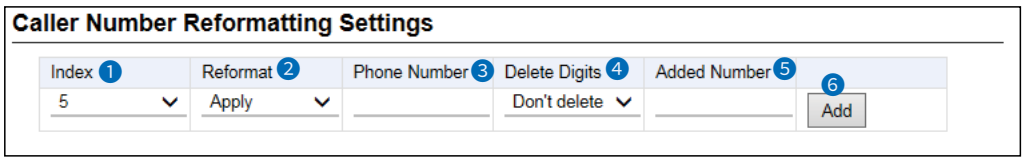

1 Index ..... Enter the order for the Caller Number Reformatting operation.
- Range: 1 ~ 100

2 Reformat ..... Set whether or not to reformat the Caller Number if a matched number is received. (Default: Apply)
- **Apply**: Reformats the number according to the rule.
- **Exception**: Does not reformat the number.

ⓘ The "Exception" rules are prior to the "Apply" rules.

3 Phone Number ..... Enter the number of up to 15 digits. (Default: Blank)
When the entered number matches at the beginning of the Caller Number, the reformatting rule is applied.

4 Delete Digits ..... Enter a number of digits if you want to delete specified digits at the beginning of the Caller Number. (Default: Don't delete)
- Range: Don't delete, or 1 ~ 15

5 Added Number ..... Enter a number if you want to add up to 15 digits to the beginning of the Caller Number. (Default: Blank)

6 <Add> ..... Click to add the entries.

Number Reformatting examples:

❍ **Example 1**
- Phone Number (3): 987
- Delete Digits (4) : Don't delete
- Added Number (5) : 800

Caller Number: 98765432

Reformatted to: 80098765432

❍ **Example 2**
- Phone Number (3): 0006
- Delete Digits (4) : 3
- Added Number (5) : 800987

Caller Number: 00065432

Reformatted to: 80098765432

Caller Number Reformatting screen

PBX Advanced Settings > Caller Number Reformatting

■ List of Caller Number Reformatting Settings

The list of entered Caller Number Reformatting Settings.

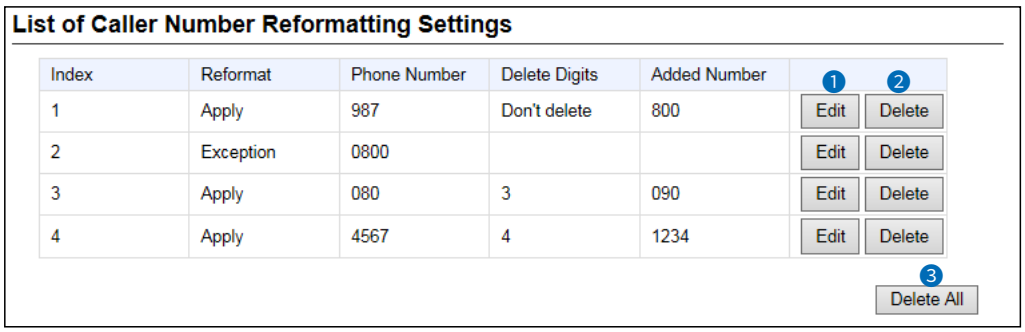

❶ **<Edit>** ..... Click to edit an entry.

❷ **<Delete>** ..... Click to delete an entry.

❸ **<Delete All>** ..... Click to delete all the entries.
ⓘ You cannot restore after clicking <Delete All>.

DID screen

PBX Advanced Settings > DID

■ DID Allocation

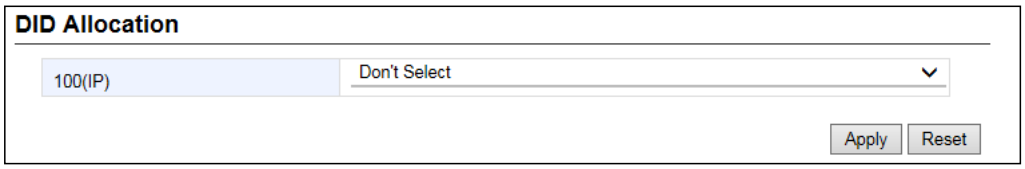

DID Allocation ..... Set the DID you use for External lines. (Default: Don't Select)

- Range: Don't Select or DID 1 ~ 10

ⓘ When selecting a DID, the IP line number (phone number) that is entered in the SIP Server Entries is displayed.

ⓘ When selecting a DID, the "Connect to" is set to the selected DID.

DID screen

PBX Advanced Settings > DID

■ DID Settings

Sets the details when using the DID (Direct Inward Dialing) function.

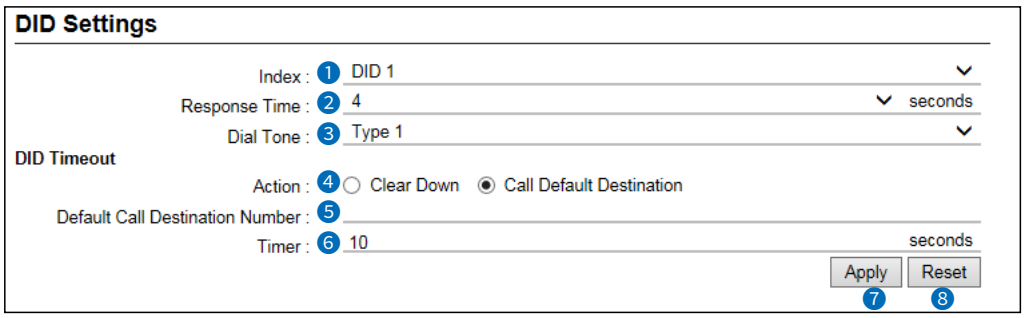

ⓘ The above screen shows when Action (4) is set to “Call Default Destination.”

1 Index ..... Select a DID that you want to edit its settings. (Default: DID 1)

2 Response Time ..... Set the delay time to sound a Dial Tone (3) since an inbound call has arrived. (Default: 4)
- Range: 0 ~ 10 (seconds)

3 Dial Tone ..... Selects the tone pattern that sounds on an IP phone. (Default: Type 1)
- Options: Type 1 ~ 3

4 Action ..... Select the timeout action of the RoIP gateway when the particular period of time (6) has passed without receiving any DTMF signal. (Default: Clear Down)
- **Clear Down**: Cancels the call without calling the client transceiver.
- **Call Default Destination**: Makes a call to the Default Call Destination Number (5).

5 Default Call Destination Number ..... Displayed only when Action (4) is set to “Call Default Destination.” Set the Destination phone number.

6 Timer ..... Enter the time period for timeout timer. (Default: 10)
- Range: 0 ~ 120 (seconds)

ⓘ When setting this item to “0,” the timeout timer does not work.
ⓘ The timer will expire when a DTMF signal is detected.

7 <Apply> ..... Click to apply the entries.

8 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

About the DID operation
After the set period of time in Timer (6) has passed without any operation since starting the Dial Tone, the DID starts the Action (4).
ⓘ You can immediately dial by pushing “#” without waiting for 5 seconds of digit interval timer.
ⓘ When dialing an incomplete phone number that does not include a DID number, the call will be canceled after the Busy Tone sounds.

DID screen

PBX Advanced Settings > DID

■ List of DID settings

Displays the DID list.

List of DID settings

Index	Response Time	Dial Tone	DID Timeout		
			Action	Default Call Destination Number	Timer
DID 1	4	Type 1	Call Default Destination	3000*101	10
DID 2	4	Type 1	Clear Down	-	10
DID 3	4	Type 1	Clear Down	-	10
DID 4	4	Type 1	Clear Down	-	10
DID 5	4	Type 1	Clear Down	-	10
DID 6	4	Type 1	Clear Down	-	10
DID 7	4	Type 1	Clear Down	-	10
DID 8	4	Type 1	Clear Down	-	10
DID 9	4	Type 1	Clear Down	-	10
DID 10	4	Type 1	Clear Down	-	10

ⓘ When a DID is set, the IP line setting in Inbound Call is changed to DID. (PBX > Inbound Call)

Inbound Call

Phone Number	Line	Connect to	Ringtone	Queuing
100	IP Line	DID 1	Outside Tone A	OFF
VEPG4	Peer to Peer	None	Inside Tone A	OFF

Apply Reset

MANAGEMENT

Section 15

Administrator screen 15-2
■ Administrator Password 15-2
Management Tools screen 15-3
■ USB 15-3
■ HTTP/HTTPS 15-5
■ If you cannot access the setting screen 15-6
■ Telnet/SSH 15-7
■ Unit ID Confirmation 15-8
Date and Time screen 15-9
■ Date and Time 15-9
■ Time Zone 15-10
■ NTP 15-11
■ SNTP Server 15-12
SYSLOG screen 15-13
■ SYSLOG 15-13
SNMP screen 15-14
■ SNMP 15-14
Network Test screen 15-15
■ Ping Test 15-15
■ Traceroute Test 15-16
Management LTE Module screen 15-17
■ Management LTE Network 15-17
Reboot screen 15-18
■ Reboot 15-18
Settings Backup/Restore screen 15-19
■ Settings Backup 15-19
■ Settings Restore 15-19
■ List of Settings 15-20
Factory Defaults screen 15-21
■ Factory Defaults 15-21
Firmware Update screen 15-22
■ Firmware Status 15-22
■ Online Update 15-23
■ Automatic Update 15-24
■ Manual Update 15-24
■ Transceiver Firmware Status 15-25
■ Online Update 15-26

Administrator screen

Management > Administrator

■ Administrator Password

Set a password for accessing the setting screen.

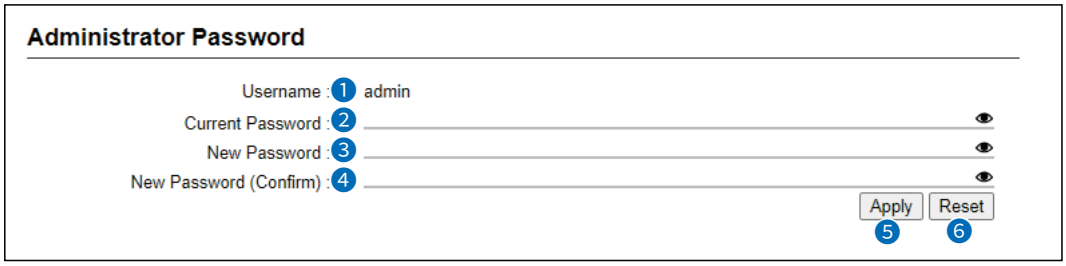

1 Username..... Displays the administrator login ID (“admin”).
ⓘ You cannot change the Username.

2 Current Password ..... Enter the current password, when you change it. (Default: admin)
ⓘ The entered characters are displayed as an * (asterisk) or a • (dot).
You can check the entered characters by clicking the eye icon to the right.

3 New Password ..... Enter a new password of 8 to 31 characters.
ⓘ The entered characters are displayed as an * (asterisk) or a • (dot).
You can check the entered characters by clicking the eye icon to the right.

4 New Password (Confirm)... Enter the new password again.

5 <Apply> ..... Click to apply the entries.

6 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

CAUTION: If you have forgotten the password, you cannot access the RoIP Gateway’s setting screen. In this case, you have to initialize the RoIP Gateway. See Section 5 of the Installation guide for details.

To prevent unauthorized access
You must be careful when setting your password.
• Set a password that is not easy to guess.
• Use letters (case sensitive), numbers, and special characters.

Management Tools screen

Management > Management Tools

■ USB

Settings for USB flash drives that will be connected to the USB ports.

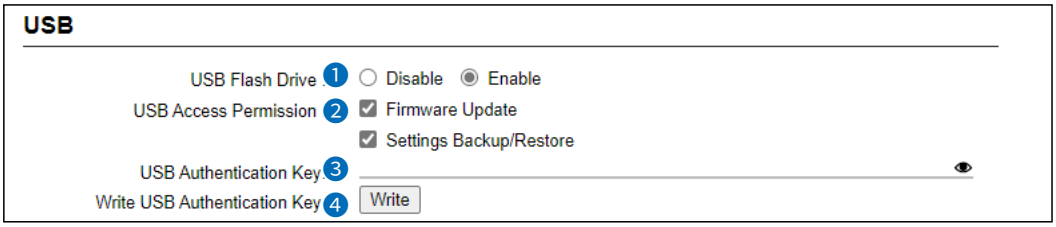

❶USB Flash Drive…… Select “Enable” to use a USB flash drive. (Default: Enable)

ⓘ If you use the Automatic firmware update function, or Automatic Setting Load function, select “Enable.”

❷USB Access Permission … Select the USB flash drive access option.

(Default: ☑ Firmware Update
☑ Settings Backup/Restore)

- Firmware Update (p.15-22)
- Settings Backup/Restore (p.15-19)

❸USB Authentication Key … Enter a USB Authentication Key of up to 64 characters to import to and export from the USB flash drive.

ⓘ This Key can restrict access to the Firmware Update function and Settings Backup/Restore function.
ⓘ After entering the characters, click <Apply> in the Management Tools.
ⓘ If you set the USB Authentication Key, the RoIP Gateway can verify the USB authentication key written in the USB flash drive.

Management Tools screen

Management > Management Tools

■ USB

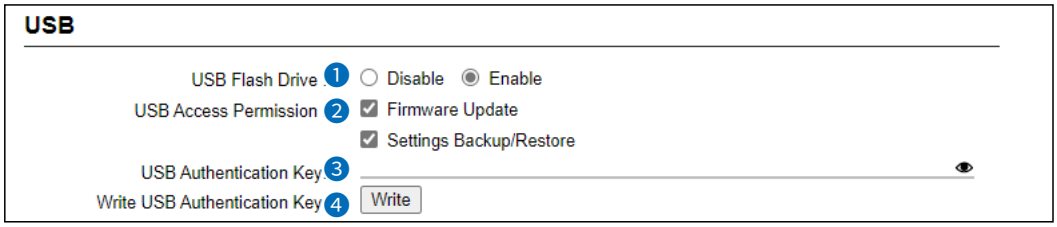

❹Write USB Authentication Key

Click to write the USB Authentication Key to the USB flash drive that is inserted in the [USB] port.
Click <Write>, then continue as shown below.

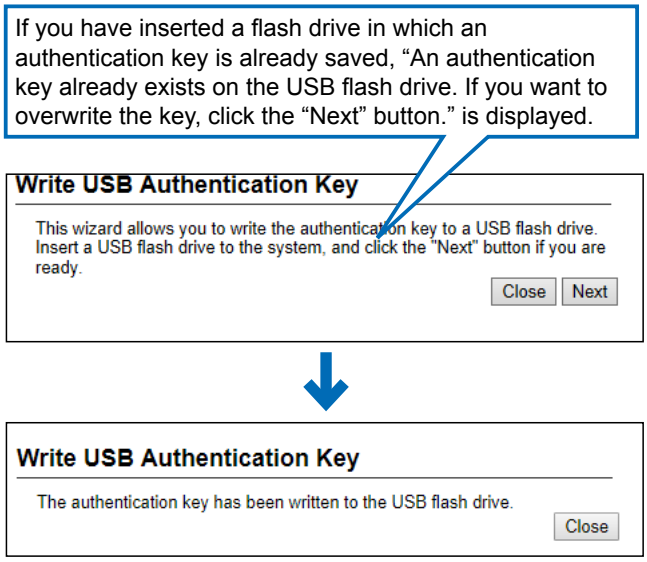

When the “The USB Authentication Key has been changed. Write the key after saving it by pushing the Apply button.” window is displayed, click <OK> and then click <Apply> on the Management Tools screen.

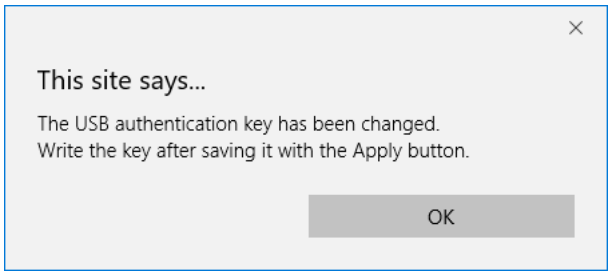

Management Tools screen

Management > Management Tools

■ HTTP/HTTPS

HTTP and HTTPS are the protocols to access from a web browser.
ⓘ When you set HTTP settings and HTTPS settings to “Enable,” you cannot access the setting screen using a browser.

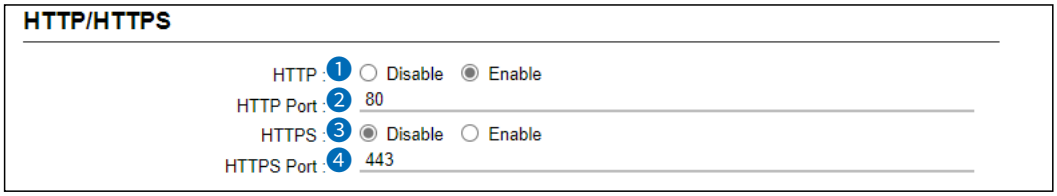

❶HTTP ..... Select whether to allow access using the HTTP protocol.
(Default: Enable)

❷HTTP Port..... Enter the HTTP Port number (Default: 80)
- Range: 80, or 1024 ~ 65535.
- Some of the RoIP Gateway’s ports cannot access HTTP.

ⓘ Enter a different port number from HTTPS, Telnet or SSH.

❸HTTPS ..... Select whether to allow access using the HTTPS protocol.
(Default: Disable)

ⓘ HTTPS access is more secure than Telnet or HTTP access because the passwords and data are encrypted.

❹HTTPS Port ..... Enter the HTTPS Port number. (Default: 443)
- Range: 443, or 1024 ~ 65535.
- Some the RoIP Gateway’s ports cannot access HTTPS.

ⓘ Enter a port number different from HTTP, Telnet or SSH.

Management Tools screen

Management > Management Tools

■ If you cannot access the setting screen

Access Telnet or SSH (Example:192.168.0.1).

- See the INSTALLATION GUIDE Section 6 for details.
- Set to default, the RoIP Gateway cannot be accessed from a Telnet client because the Telnet setting is set to “Disable.”(Management > Management Tools > Telnet/SSH > Telnet) (See page 15-7.)

After entering “VE-PG4>,” enter the letters written in bold as follows, and then press [Enter].

1. Enter “**network http enabled on**,” and then press [Enter].
2. Enter “**save**,” and then press [Enter].
   - The setting is applied.
3. Check if you can access the setting screen.

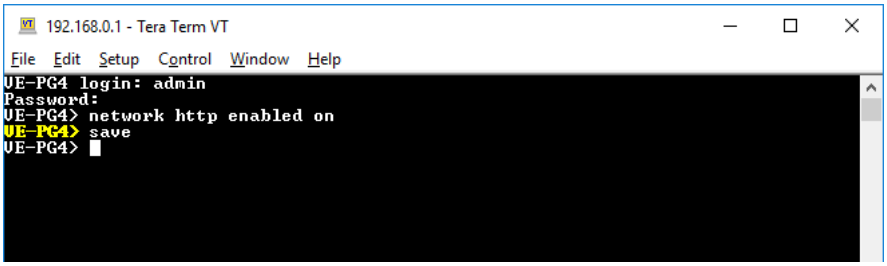

Management Tools screen

Management > Management Tools

■ Telnet/SSH

Set for accessing the RoIP Gateway using Telnet or SSH.

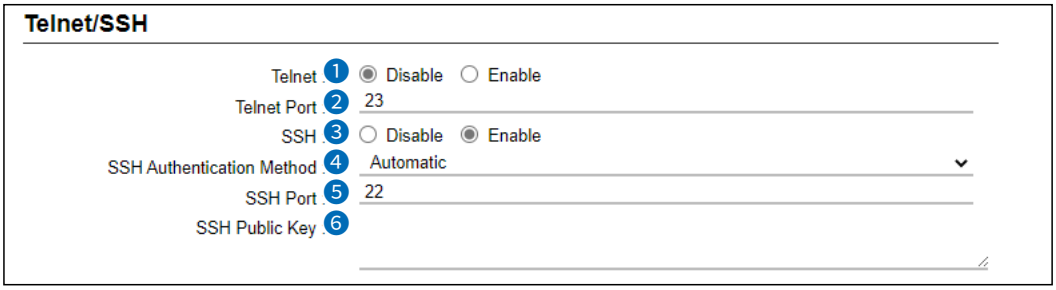

❶ Telnet ..... Select whether or not to allow access to the RoIP Gateway using Telnet. (Default: Disable)

❷ Telnet Port ..... Enter the Telnet Port number. (Default: 23)
- Range: 23, or between 1024 and 65535.
- Some the RoIP Gateway's ports cannot access Telnet.

ⓘ Enter a different port number different than HTTP, HTTPS, or SSH.

❸ SSH ..... Select whether to allow to access by the SSH protocol.(Default: Enable)

ⓘ By using SSH, you can encrypt the contents to be set using the SSH client program.

ⓘ This product supports only the SSH protocol Version 2.

ⓘ Prepare an SSH client to use SSH.

❹ SSH Authentication Method Select the SSH Authentication Method to access the RoIP Gateway when you set SSH Settings to "Enable." (Default: Automatic)
- **Password**: Authenticating with the password.
- **Public Key**: Authenticating with the Public Key.
- **Automatic**: Automatically authenticating with the password or the Public Key.

❺ SSH Port ..... Enter the SSH Port number. (Default: 22)
- Range: 22, or between 1024 and 65535.
- Some of the RoIP Gateway's ports cannot access SSH.

ⓘ Enter a port number that is different from HTTP, Telnet, or HTTPS.

❻ SSH Public Key ..... Set the Public Key for accessing.

ⓘ Displayed only when the SSH setting is set to "Enable" and SSH Authentication Method is set to "Public" or "Automatic."

Management Tools screen

Management > Management Tools

■ Unit ID Confirmation

You can know which VE-PG4 is the current RoIP Gateway by the blinking lights on it.

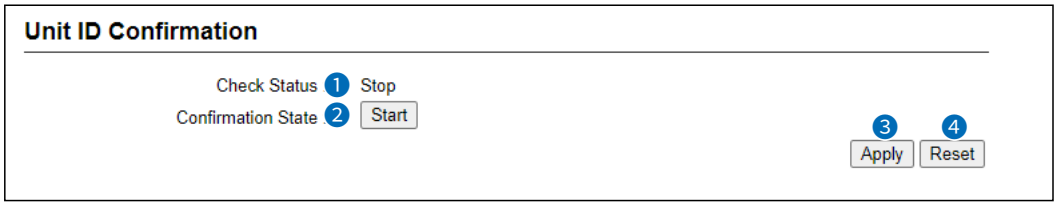

❶Check Status ..... Display the status of the Unit ID.
- **Checking**: Checking the Unit ID and [PWR] blinks red.
- **Stop**: Does not check.

❷Confirmation State ..... Click <Start> to start checking.
- [PWR] blinks red.
- While checking, the <Start> button changes to the <Stop> button.
- This function automatically stops in 2 minutes, but you can also manually stop the check by clicking <Stop>.

❸<Apply> ..... Click to apply the entries set on the Management Tool screen.

❹<Reset> ..... Click to reset the settings, when you change the settings on the "Management Tools" screen.
ⓘ You cannot reset after clicking <Apply>.

Date and Time screen

Management > Date and Time

■ Date and Time

You can set the RoIP Gateway internal clock time. (See Section 3 for details.)

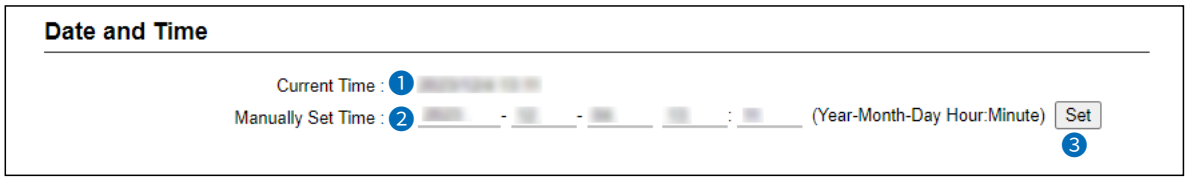

❶Current Time ..... Displays the current time.

❷Manually Set Time ..... Displays the time when you opened this screen.
ⓘ Refresh the browser screen to refresh the time.

❸<Set> ..... Click to set the internal clock to the time displayed in the “Manually Set Time”(❷).
ⓘ Before clicking <Set>, refresh the browser screen.

Date and Time screen

Management > Date and Time

■ Time Zone

Select the appropriate Time Zone.

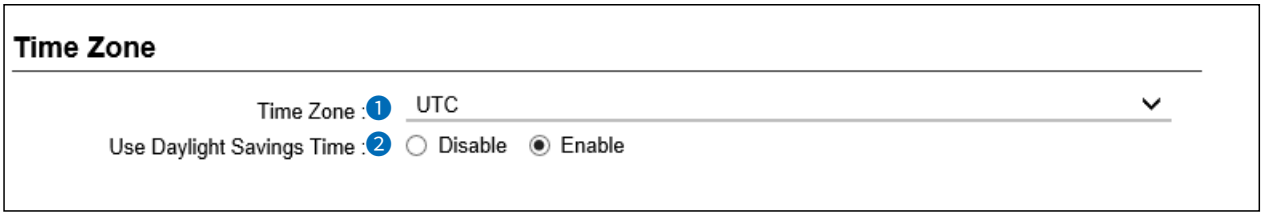

1 Time Zone ..... Select the appropriate Time Zone. (Default: UTC)

2 Use Daylight Savings Time Select “Disable” if not necessary. (Default: Enable)

ⓘ If “Enable” is selected, the RoIP Gateway automatically adjusts the time according to your time zone.
ⓘ If Daylight Savings Time is not used in your area, set to “Disable.”

Date and Time screen

Management > Date and Time

■ NTP

The Automatic Clock Synchronize function automatically synchronizes the internal clock with the time server (NTP).
ⓘ To use this function, an Internet connection and default gateway settings are necessary.

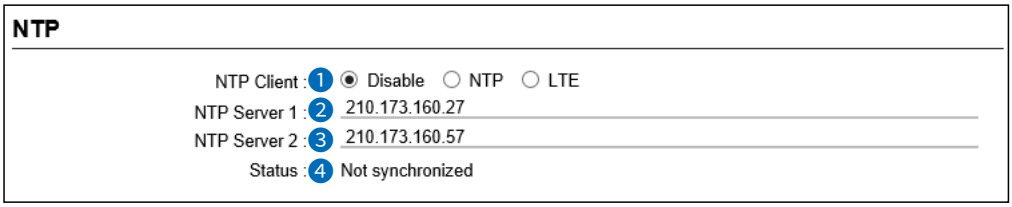

❶NTP Client ..... Select whether or not to use the Automatic Clock Synchronize function.
(Default: Disable)

- **Disable**: Not used.
- **NTP**: Set to the internal clock automatically by accessing the NTP.
- **LTE**: Set to the internal clock automatically by accessing the LTE Module.

❷NTP Server 1 ..... Enter the time management server's IP address.
(Default: 210.173.160.27)
If the RoIP Gateway cannot access this address, the address set in the [NTP Server 2] (❸) item is used.

❸NTP Server 2 ..... Enter the second time management server's IP address.
(Default: 210.173.160.57)

❹Status ..... Displays the status whether or not to synchronize with the NTP Server or the transceiver module.

CAUTION: When you select NTP Client as NTP, you must set the Interface for the NTP server.
(Network Settings > IP Address > IP Address > Default Gateway)
(Network Settings > Static Routing > Static Routing)

TIP: The Automatic Clock Synchronize function
When you connect to the SIM card,

- Set the Automatic Clock Synchronize function to LTE, to synchronize the current time to the transceiver module.
- Set the Automatic Clock Synchronize function to NTP, to synchronize the current time to the NTP server.
- After inserting the SIM card, the RoIP Gateway is automatically set to the Automatic Clock Synchronize function.

Date and Time screen

Management > Date and Time

■ SNTP Server

The SNTP server is for other RoIP devices that have no route to an external Time server (NTP).
ⓘ To use this function, an Internet connection and default gateway settings are necessary.

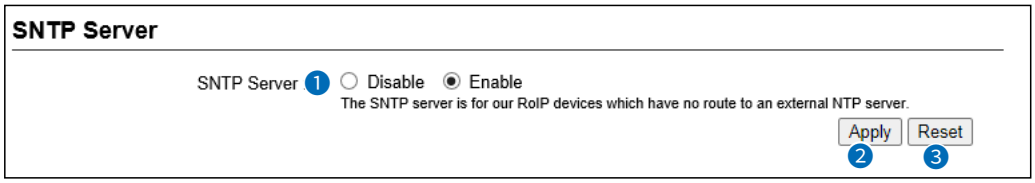

❶SNTP Server ..... Select “Enable” to use the SNTP function. (Default: Enable)
When you select ‘Enable’, the RoIP devices function as an NTP server and set the internal clock time of the RoIP Gateway.
ⓘ This function can be used only for Icom RoIP devices, which cannot set the route to the external NTP server.
ⓘ Set the Date and Time screen before using this function.

❷<Apply> ..... Click to apply the entries set on Time Zone, NTP, and SNTP Server.

❸<Reset> ..... Click to reset the settings when you change the settings on Time Zone, NTP, and SNTP Server.
ⓘ You cannot reset after clicking <Apply>.

SYSLOG screen

Management > SYSLOG

■ SYSLOG

Select the information to be saved to the SYSLOG host.

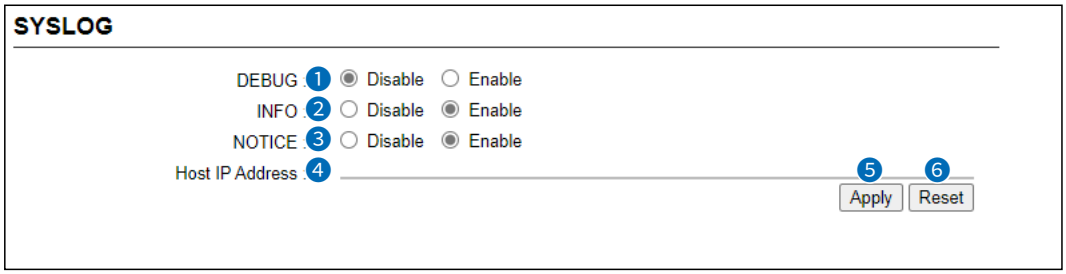

❶DEBUG ..... Select “Enable” to display the debug information in Host IP Address (❹). (Default: Disable)

❷INFO ..... Select “Enable” to display the INFO messages in Host IP Address (❹). (Default: Enable)

❸NOTICE ..... Select “Enable” to display the NOTICE messages in Host IP Address (❹). (Default: Enable)

❹Host IP Address ..... Enter the SYSLOG host’s address.
ⓘ The host device must have the SYSLOG server function.

❺<Apply> ..... Click to apply the entries.

❻<Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

SNMP screen

Management > SNMP

■ SNMP

Configure the SNMP function, that is information on the RoIP Gateway for being collected by each host in the IP network for their network management.

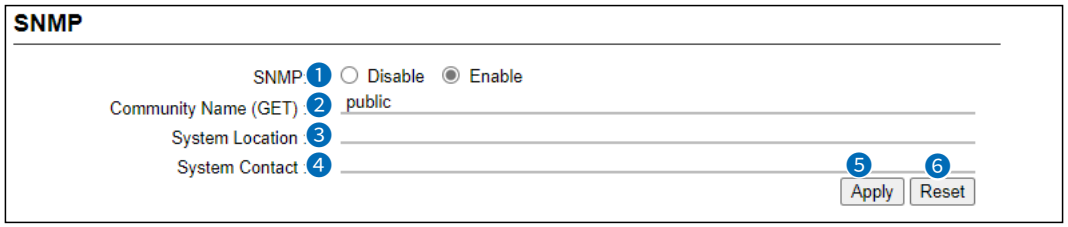

❶SNMP..... Select “Enable” to manage the setting information in the SNMP management tool. (Default: Enable)

❷Community Name (GET) ... Enter the Community name to get the SNMP community string. (Up to 31 characters) (Default: public)

❸System Location ..... Enter the SNMP system location. (Up to 127 characters)

❹System Contact ..... Enter the SNMP system contact. (Up to 127 characters)

❺<Apply> ..... Click to apply the entries.

❻<Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Network Test screen

Management > Network Test

■ Ping Test

Verifies that a particular IP address exists and can accept requests.

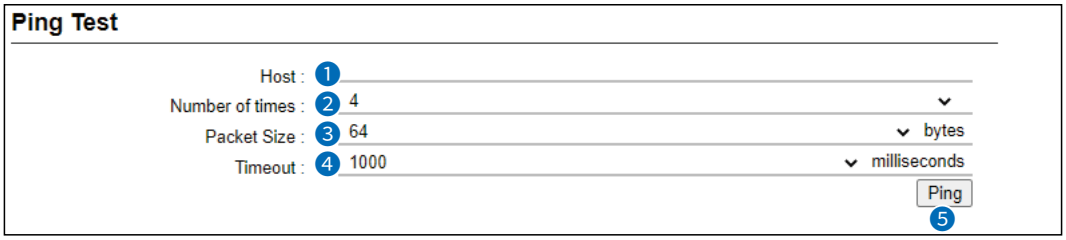

❶Host ..... Enter the IP address or Domain Name of up to 64 characters to send the Ping packets to.

❷Number of Times ..... Select the number of times to send. (Default: 4)
• Options: 1, 2, 4, 8

❸Packet Size ..... Select the size of the packet's data. (Default: 64)
• Options: 32, 64, 128, 256, 512, 1024, 1448, 1500, 2048 (bytes)

❹Timeout..... Select the Ping response time. (Default: 1000)
Note: If there is no response within the selected time, a time out error is returned.
• Options: 500, 1000, 5000 (milliseconds)

❺<Ping> ..... Click to run the Ping test.
ⓘ The test result is displayed as shown below.

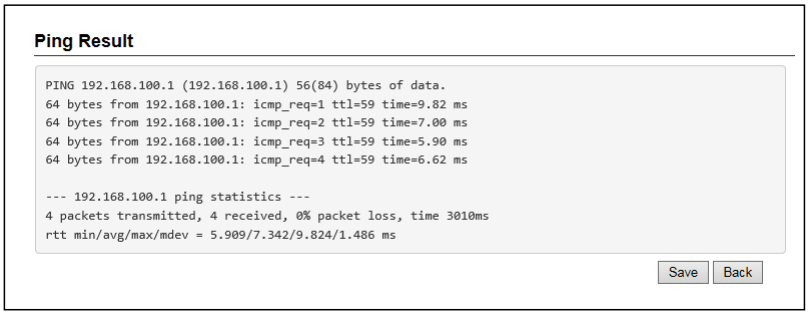

ⓘ Click <Save> to save the result to a PC as a text file (extension: "txt").
Note: The file is saved as "ping_*host's address*.txt."
ⓘ Click <Back> to return to the Ping Test screen.

Network Test screen

Management > Network Test

■ Traceroute Test

Executes a traceroute test against a particular node.

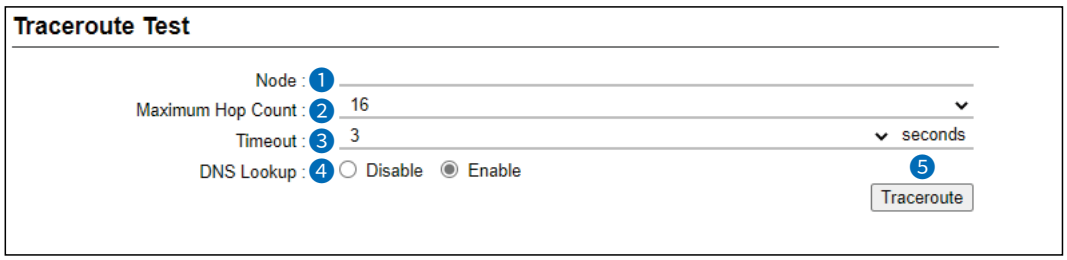

1 Node ..... Enter the node's (device's) IP address or Domain Name of up to 64 characters.

2 Maximum Hop Count ..... Select the maximum hop number. (Default: 16)
- Options: 4, 8, 16, 32

3 Timeout..... Select the response time. (Default: 3)
Note: If there is no response within the selected time, a time out error is returned.
- Options: 1, 3, 5 (seconds)

4 DNS Lookup ..... Select "Enable" to convert the node's (device's) IP address into the host name. (DNS name resolution) (Default: Enable)

5 <Traceroute> ..... Click to run the traceroute test.

- The test result is displayed as shown below.

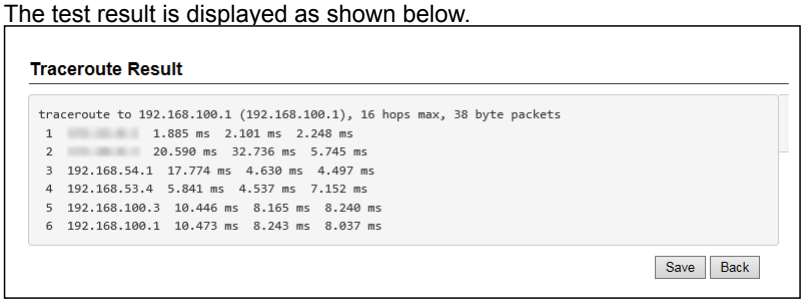

- Click to save the result to a PC as a text file (extension: "txt").
- The file is saved as "tracert_*node's address*.txt."
- Click <Back> to return to the Traceroute Test screen.

Management LTE Module screen

Management > Management LTE Module

■ Management LTE Network

The settings and status for connecting to an LTE network.

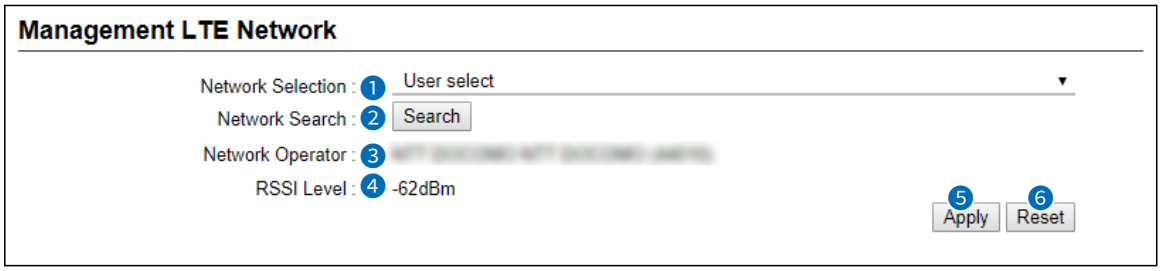

1 Network Selection ..... Set to automatically select the LTE Network, select the last accessed, or enable the User to select. (Default: Auto)

- **Auto**: Automatically selects the network that the LTE module can connect to. LTE is selected prior to 3G if both of them are usable.
- **Last accessed**: When turning on the RoIP Gateway, the same connection way as before is attempted. If the previous LTE Network Operator (PLMN) is not saved, 'Auto' is selected, and saves the LTE Network Operator (PLMN) when the network can connect.
  ⓘ The RoIP Gateway works in the same way as the "Auto" setting, if it could not connect to the last accessed LTE Network Operator (PLMN.)
- **User select**: You can select the network from LTE or 3G after searching. If the selected network cannot be found, the RoIP Gateway cannot connect to the network.

2 Network Search ..... If you select "User select," the Network Search setting is displayed. Click <Search>, and <OK> on the displayed dialog, to display the list of the LTE Network Operators (PLMN) that this RoIP Gateway can connect to.
ⓘ Loading may take a few minutes or more.

3 Network Operator ..... Displays the connected LTE Network Operator (PLMN).

4 RSSI Level ..... Displays the RSSI (Received Signal Strength Indicator) level (dBm).

5 <Apply> ..... Click to apply the entries.

6 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

Reboot screen

Management > Reboot

■ Reboot

Click <Reboot> to reboot the RoIP Gateway.

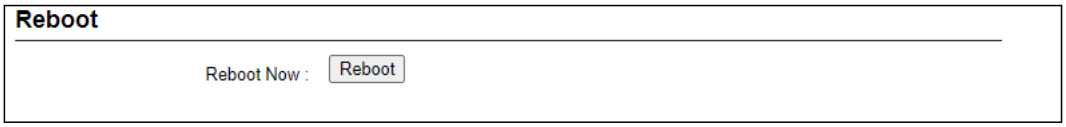

Settings Backup/Restore screen

Management > Settings Backup/Restore

■ Settings Backup

Save the RoIP Gateway's settings to a PC as a backup.

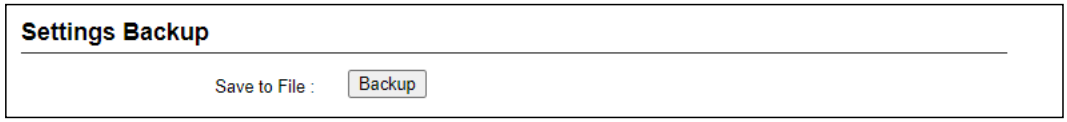

Save to File ..... Click <Backup> to save the settings to a PC as a backup file (Extension: sav).
See the topic below to load the saved file into the RoIP Gateway.

Management > Settings Backup/Restore

■ Settings Restore

Load the setting file (Extension: "sav") into the RoIP Gateway.
ⓘ Loading takes a few minutes.

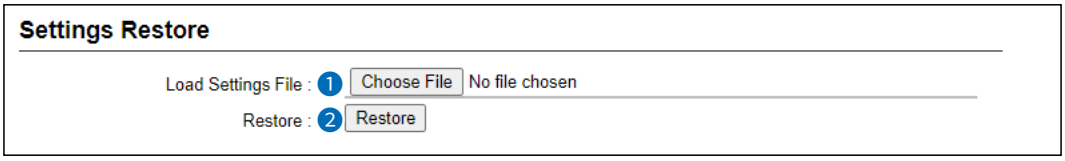

❶ Load Settings File ..... Click <Choose File> to select the setting file.

❷ Restore ..... Click <Restore> to load the setting into the RoIP Gateway.
ⓘ The RoIP Gateway's settings are overwritten.
ⓘ After loading, the RoIP Gateway automatically reboots.

CAUTION: Do not modify the settings other than the VE-PG4.

Settings Backup/Restore screen

Management > Settings Backup/Restore screen

■ List of Settings

Click <Show> to display the changed settings, and click <Hide> to hide them.
Note: The list is cleared when the RoIP Gateway is initialized.

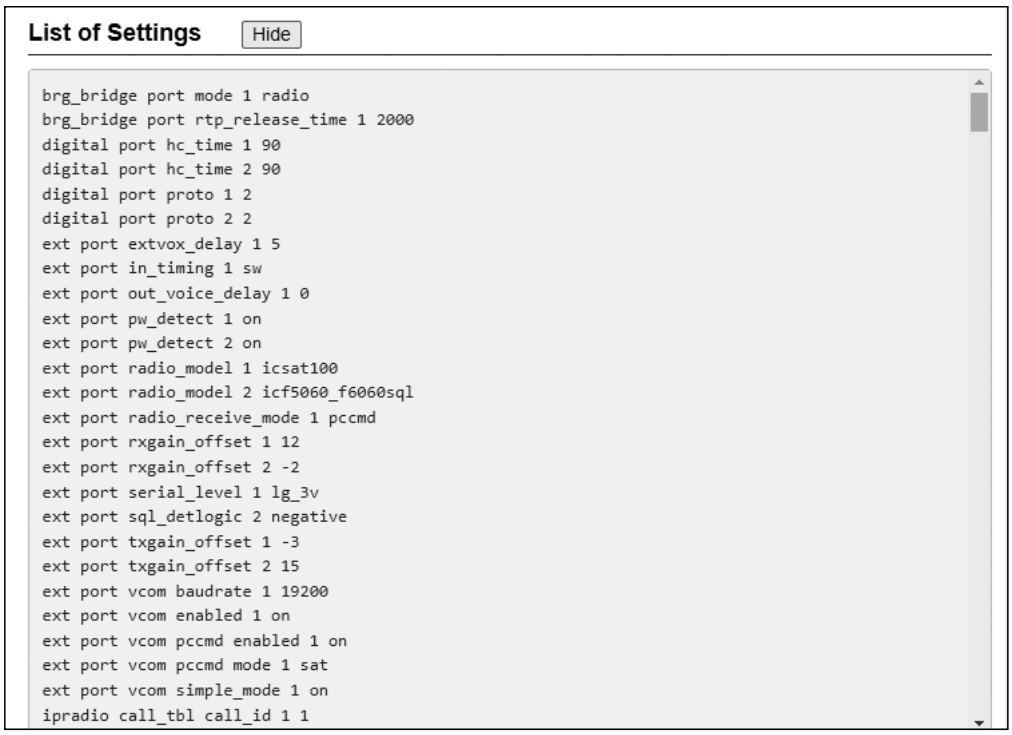

(This is only an example.)

Factory Defaults screen

Management > Factory Defaults

■ Factory Defaults

You can reload the RoIP Gateway settings to the factory defaults.
ⓘ If you forget the IP address and the Administrator's password, see Section 5 in the Installation guide.

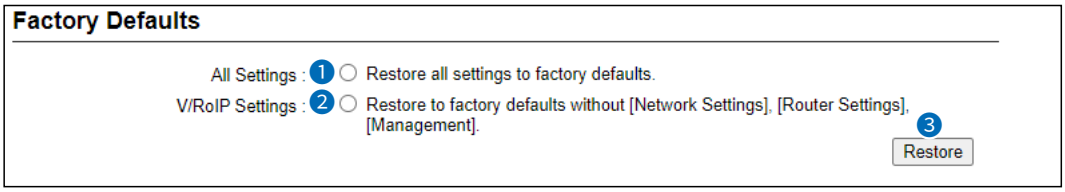

❶ All Settings ..... Select to return all settings to the factory defaults.
ⓘ After the RoIP Gateway is initialized, the IP address is returned to the default (192.168.0.1).
ⓘ If the network part of the PC IP address is different from that of the RoIP Gateway, you cannot access the RoIP Gateway setting screen.
In such case, change the PC IP address according to your network environment.

❷ V/RoIP Settings ..... Select to return the settings to the factory defaults except for the Network Settings, the Router Settings, and the Management Settings.

❸ Restore ..... Click to restore the settings.

Firmware Update screen

Management > Firmware Update

NOTE:
- **NEVER** turn OFF the power until the update has been completed. Otherwise, the RoIP Gateway may be damaged.
- While updating, all connections are temporarily disabled.

ⓘ Ask your dealer for updated function or specification details.

■ Firmware Status

Displays the firmware version.



Firmware Update screen

Management > Firmware Update

■ Online Update

Downloads the firmware through the Internet, and automatically updates it.

NOTE: To use this function, an Internet connection, or 4G (LTE)/3G is required.

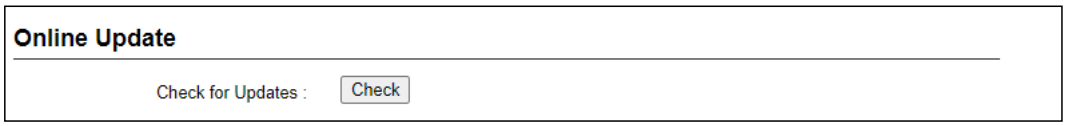

Check for Updates ..... Click <Check> to access the update management server. When the RoIP Gateway has successfully accessed the server, the latest firmware version is displayed, as shown below.

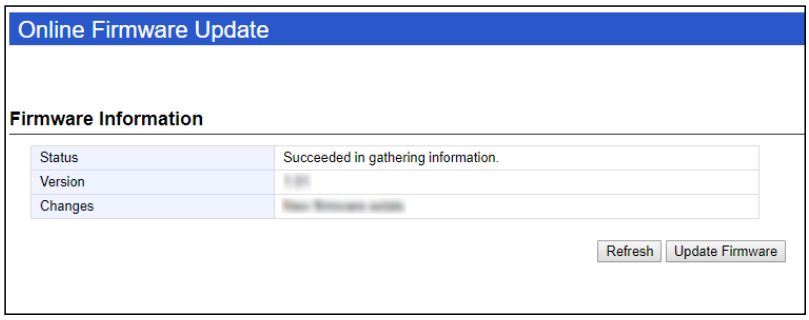

About the firmware information:

- When there is a new firmware update available, the <Update Firmware> button is displayed.
- When there is no firmware update, “Firmware already up-to-date” is displayed.
- When an error message is displayed, check the network connection so that you can access the update management server, as follows:

When a SIM card is installed:

- Confirm that the antennas are attached properly to the [ANT1] and [ANT2] connectors.

When a SIM card is not installed:

- Confirm that the default gateway and DNS server address are properly set to the RoIP Gateway. (Network Settings > IP Address)
- Ask your network administrator if a web transmission from the RoIP Gateway is blocked.

CAUTION: Do not turn OFF the power until the firmware update is completed.
ⓘ Ask your dealer for updated function or specification details.

Firmware Update screen

Management > Firmware Update

■ Automatic Update

The firmware can be automatically downloaded and updated.
ⓘ When a SIM card is inserted, the Automatic Update Setting is not displayed.

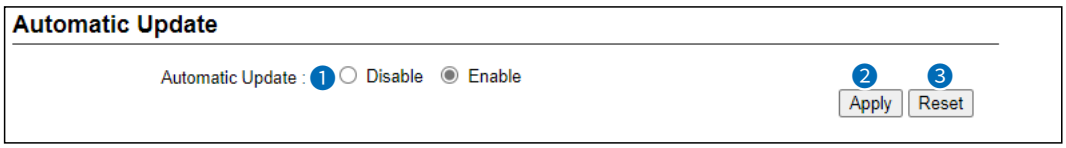

1 Automatic Update ..... Select “Enable” to use the Automatic Update function. (Default: Enable)
ⓘ Select “Disable” if you do not want to automatically update the firmware.

2 <Apply> ..... Click to apply the entries.

3 <Reset> ..... Click to reset the settings.
ⓘ You cannot reset after clicking <Apply>.

■ Manual Update

The firmware can be updated using the saved firmware.

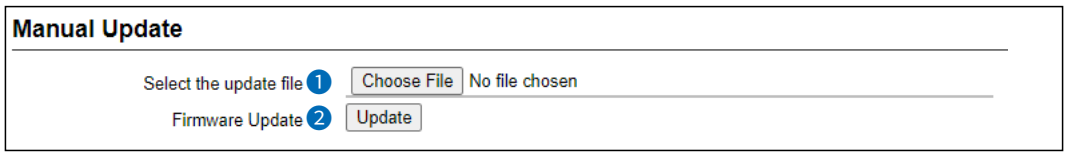

1 Select the update file ..... Click <Choose File> to select the firmware file (extension: “dat”).
ⓘ The selected file appears in the “Update Firmware using File” item.

2 Firmware Update ..... Click <Update> to update the firmware.
Note: After updating, the RoIP Gateway automatically reboots.

CAUTION: DO NOT turn OFF the power until the firmware update is completed.
ⓘ Ask your dealer for updated function or specification details.

Firmware Update screen

Management > Transceiver Firmware Update

NOTE:
- NEVER turn OFF the power until the update has been completed. Otherwise, the RoIP Gateway and the transceivers may be damaged.
- While updating, all connections are temporarily disabled.

ⓘ Ask your dealer for updated function or specification details.

■ Transceiver Firmware Status

Displays the built-in firmware for the WLAN transceiver. The model name and the version of the firmware are listed.

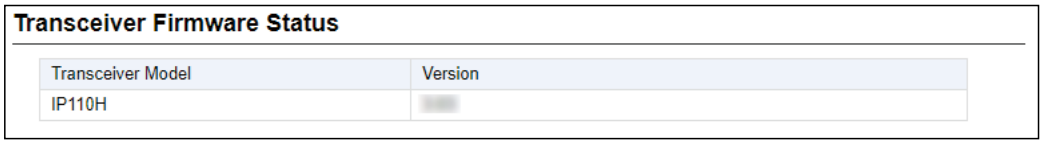

Firmware Update screen

Management > Transceiver Firmware Update

■ Online Update

Downloads the built-in firmware for the WLAN transceivers through the Internet, and automatically updates it.

NOTE: To use this function, an Internet connection is required.

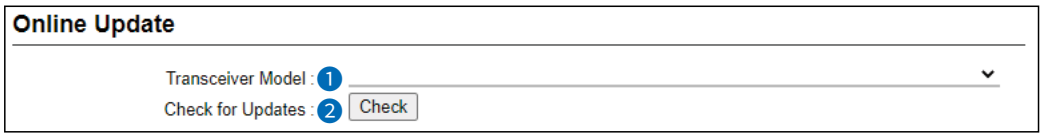

❶ Transceiver Model ..... Select the model name that you want to update the firmware. in the RoIP Gateway.
ⓘ As of April 2026, only the IP110H is selectable.

❷ Check for Updates..... Click <Check> to connect to the update management server. When the RoIP Gateway has successfully connected, the latest firmware status is displayed, as shown below.

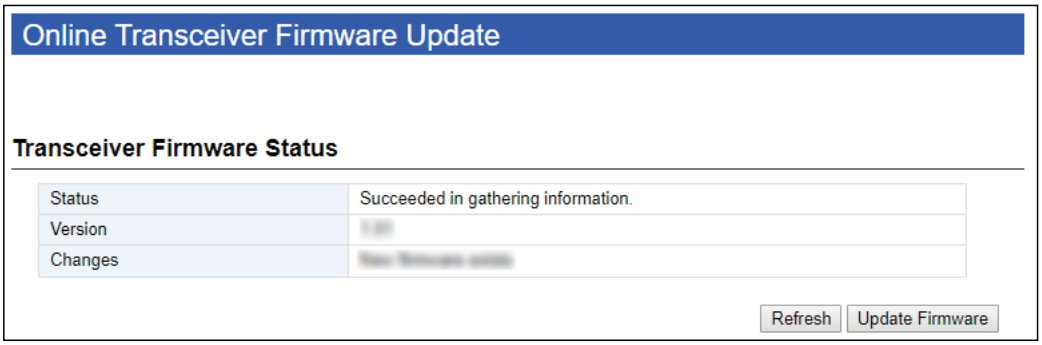

About the firmware information:

- When there is a new firmware update available, the <Update Firmware> button is displayed.
- When there is no firmware update, “Firmware already up-to-date” is displayed.
- When an error message is displayed, check the network connection so that you can access the update management server, as follows:
  - Confirm that the default gateway and DNS server address are properly set to the RoIP Gateway. (Network Settings > IP Address)
  - Ask your network administrator if a web transmission from the RoIP Gateway is blocked.

CAUTION: DO NOT turn OFF the RoIP Gateway until the firmware update is completed.
ⓘ Ask your dealer for updated function or specification details.

How the World Communicates



A7487-4EX-11
© 2019–2026 Icom Inc. Apr. 2026

Icom Inc.
1-1-32 Kamiminami, Hirano-ku, Osaka 547-0003, Japan